| PROJECT: | TYPE: |
|-----------|-------|
| LOCATION: | CAT: |
| | |
| | |
| | |

Description

Low-profile LED Linear lighting with superb light output for indoor and outdoor use

Features

- Each kit includes: (1) 5ft removable power cord with 8A inverter (H2-CONKIT-8A), (1) Removable end cap, and Mounting Clips (1 per foot of length)
- Parallel wiring to each LED ensures that if one LED goes out, the rest of the cutting increment stays lit
- Flexible rubber housing with clear PVC lens are protected with UV inhibitor
- Various mounting, linking, and power accessories available (sold separately)

Mounting

Mounting clips or mounting track

Applications

Accent Lighting, Coves, Ledges, Shelves

Warranty

1 year Standard Linear

Technical Information












| | Hybrid 2 Kits | | | | | | | | | | | |
|----------------|---|-----|------|------|------|------|----------------------|-----|------|------|------|------|
| Voltage | 120V AC, 60Hz | | | | | | | | | | | |
| CCT | Warm White (2700K) | | | | | | Bright White (5000K) | | | | | |
| Length | 3ft | 6ft | 12ft | 18ft | 30ft | 45ft | 3ft | 6ft | 12ft | 18ft | 30ft | 45ft |
| Wattage | 9W | 18W | 36W | 54W | 90W | 135W | 9W | 18W | 36W | 54W | 90W | 135W |
| Lumens | 145Lm/Ft 180Lm/ft | | | | | | | | | | | |
| CRI | 82+ | | | | | | | | | | | |
| Max Run | 150 feet | | | | | | | | | | | |
| Beam Angle | 120° | | | | | | | | | | | |
| Dimming | 10-100% with most incandescent, low-voltage magnetic, and low-voltage electronic dimmers* | | | | | | | | | | | |
| Operating Temp | -30°C (-22°F) to 45°C (113°F)** | | | | | | | | | | | |
| Storage Temp | -10°C (14°F) to 30°C (86°F)** | | | | | | | | | | | |
| LED Spacing | Every 5/8"; 20 per foot | | | | | | | | | | | |
| Rating | cETLus Listed (void if cut); Indoor/Outdoor; IP65 | | | | | | | | | | | |
| Rated Life | 30,000 Hours | | | | | | | | | | | |


^{*}Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers.

^{**}Do not install in inclement whether or extreme temperature conditions (i.e. -25°C (-13°F) and below)

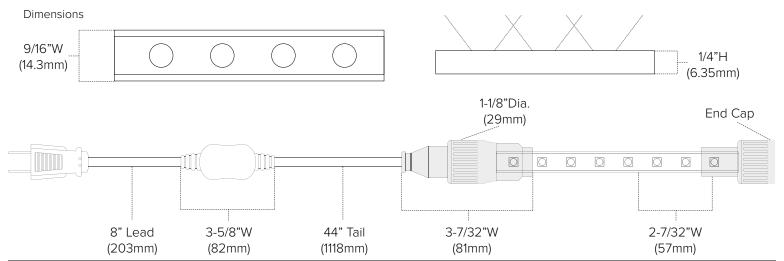



Ordering Information



Hybrid 2 120V Kits Include:

(1) 5ft removable power cord with 8A inverter (1) Removable end cap Mounting Clips (1 per foot of length)

Example Part # **H2-KIT-3-WW**



Accessories

| Image | Part Number | Description |
|-------|---------------|---|
| | H2-KIT-JUMP3 | 3ft jumper/linking cable for Hybrid 2 Kits with twist-and-tighten connectors |
| | H2-KIT-JUMP10 | 10ft jumper/linking cable for Hybrid 2 Kits with twist-and-tighten connectors |
| | H2-KIT-JUMP15 | 15ft jumper/linking cable for Hybrid 2 Kits with twist-and-tighten connectors |
| | H2-TRACK-3 | 3ft clear plastic mounting track (23/32"W x 13/32"H) |
| | H2-CHAN-3 | 3ft aluminum mounting channel (23/32"W x 12/32"H) |
| | H2-ENDS | Clear plastic end caps for Hybrid 2 (bag of 10) |
| 11 | H2-CLIPS | Clear plastic mounting clips with mounting screws for Hybrid 2 (bag of 10) |

Cut-view when used with H2-TRACK-3 or H2-CHAN-3 (sold separately)

