




Features

- Excellent color rendering (94-96+ CRI)
- Color temperatures from 2400K to 4000K
- 100-155 lumens per foot performance
- Consumes only 2.19 watts per foot
- Dimmable with most ELV dimmers
- Cuttable every 6.56" (24V) and 3.94" (12V)
- 32.8 ft (24V DC) / 27 ft (12V DC) max run
- (IP54) unjacketed or (IP65) jacketed versions
- 50,000 hours rated life
- Suitable for use in closets when used in an enclosed extrusion based on NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5)

Available CCT



Control Options

- Primary Side Dimming
- Trulux Single Color Controls
- Spektrum Smart Receiver (App Controlled)
- Single Color In-line Controller

Listing / Ratings




TRULUX™ Standard Grade - 24V / 12V DC

Build an economical and versatile layered lighting system with Trulux Standard Grade tape light. Light output ranging from 140-155 lumens per foot, with easy to work with run lengths up to 32.8 feet, Trulux Standard Grade is perfect for accent lighting applications when soft and subtle lighting is desired.

Technical Information

Series	STL
Input Voltage	24V DC / 12V DC (STL-WW-100-12V only)
CCT	2400K / 2700K / 3000K / 4000K
CRI	94+ (UWX & IP65) / 96+
Wattage	2.19W per ft
Lumens	Up to 155Lm per ft
Max Run	32.8 ft (24V) / 27 ft (12V)
Cutttable	Every 6.56 in (24V) / 3.94 in (12V)
IP Rating	IP54 (unjacketed) / IP65 (jacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

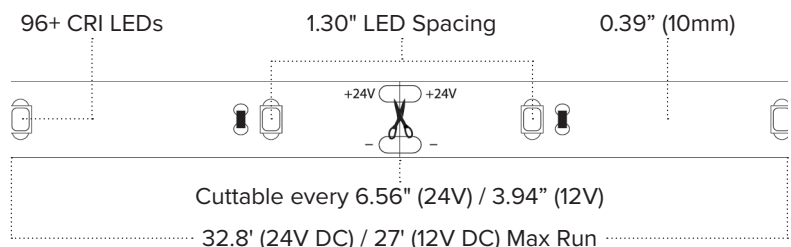



STL SERIES ORDERING INFORMATION

Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
STL-UWX	24V DC	2400K	16.4 ft	140Lm / ft	2.19W / ft	IP54	94+	6.56" (167mm)
STL-UWX-33	24V DC	2400K	32.8 ft	140Lm / ft	2.19W / ft	IP54	94+	6.56" (167mm)
STL65-UWX	24V DC	2400K	16.4 ft	100Lm / ft	2.19W / ft	IP65	94+	6.56" (167mm)
STL-UWX-CC	24V DC	2400K	Custom Cut	140Lm / ft	2.19W / ft	IP54	94+	6.56" (167mm)
STL-UWW	24V DC	2700K	16.4 ft	146Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-UWW-33	24V DC	2700K	32.8 ft	146Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL65-UWW	24V DC	2700K	16.4 ft	105Lm / ft	2.19W / ft	IP65	94+	6.56" (167mm)
STL-UWW-100	24V DC	2700K	100 ft	146Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-UWW-CC	24V DC	2700K	Custom Cut	146Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WW	24V DC	3000K	16.4 ft	150Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WW-33	24V DC	3000K	32.8 ft	150Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL65-WW	24V DC	3000K	16.4 ft	115Lm / ft	2.19W / ft	IP65	94+	6.56" (167mm)
STL-WW-100	24V DC	3000K	100 ft	150Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WW-100-12V	12V DC	3000K	100 ft	150Lm / ft	2.19W / ft	IP54	96+	3.94" (100mm)
STL-WW-CC	24V DC	3000K	Custom Cut	150Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WH	24V DC	4000K	16.4 ft	155Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WH-33	24V DC	4000K	32.8 ft	155Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL65-WH	24V DC	4000K	16.4 ft	125Lm / ft	2.19W / ft	IP65	94+	6.56" (167mm)
STL-WH-CC	24V DC	4000K	Custom Cut	155Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)


STL (IP54) 16.4ft & 32.8ft Reels include: Attached 3ft Lead Wire / (3) TL-CONKIT / (3) TL-BLKS / (3) HD Power Feeds

STL65 (IP65) 16.4ft Reels include: Attached 2' IP65 Lead + 6" Conkit / Attached 2' IP65 Tail +6" Conkit / (3) HD Power Feeds / (3) HD Splice Connectors


STL (IP54) 100ft Reels include: Attached 3ft Lead Wire / (5) TL-CONKIT / (5) TL-BLKS / (5) HD Power Feeds

SINGLE COLOR ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6" HD Power Feed
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2JUMP65-.5	6" IP65 Linking Cable
TL-2JUMP65-1	12" IP65 Linking Cable
TL-2JUMP65-2	24" IP65 Linking Cable
WIRE-15-2PIN	15ft (20/2) Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
LVS-2PIN	In-line Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

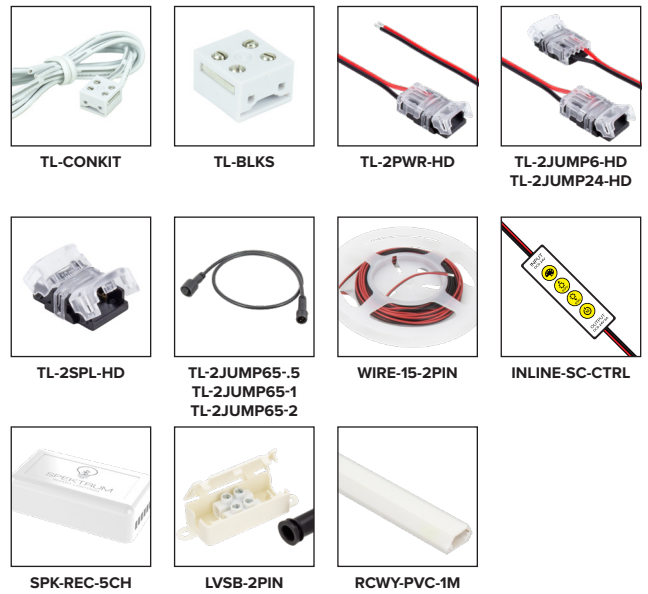

Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Trulux Tape Light