

# 24V MICROLINK Seamless Bar Light

PROJECT:  TYPE:

LOCATION:  CAT:



## Description

Linkable modular seamless bar light

## Features

- Seamless LED light can be joined with “cross”, “T”, and “L” connections
- Low-profile fixture fits in a multitude of locations
- Long life LEDs produce high lumen output
- Diffuse lens for smooth, even light
- Plug and play system for quick installation (uses DC Plug connection)
- Suitable for under cabinets, framed areas, shelves, closets, bookcases, and other areas of focus
- cETLus Listed for indoor, dry locations

## Mounting

Mounting clips with screws


## Applications

Under-cabinets, Task Lighting

## Technical Information




Length	6"	16"	22"	32"
Voltage	24V DC			
CCT	3000K			
CRI	90+			
Wattage	2.1W	5.7W	7.9W	12.2W
Lumens (up to)	200	520	720	1100
Max Run	5 meters (16.4 feet)			
Beam Angle	120°			
Dimming	5-100% with most standard 2-wire and CL dimmers			
Rating	cETLus Listed, dry locations			
Rated Life	35,000 Hours			

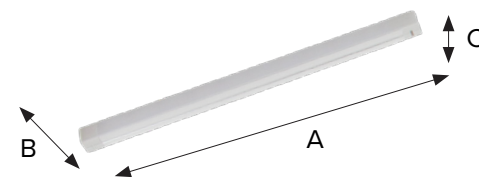

Part Number	A	B	C
MLINK6	6-3/16"	0.496"	0.39"
MLINK16	15-11/16"	0.496"	0.39"
MLINK22	21-1/8"	0.496"	0.39"
MLINK32	32-5/8"	0.496"	0.39"

Measurements with conkit and end cap attached.

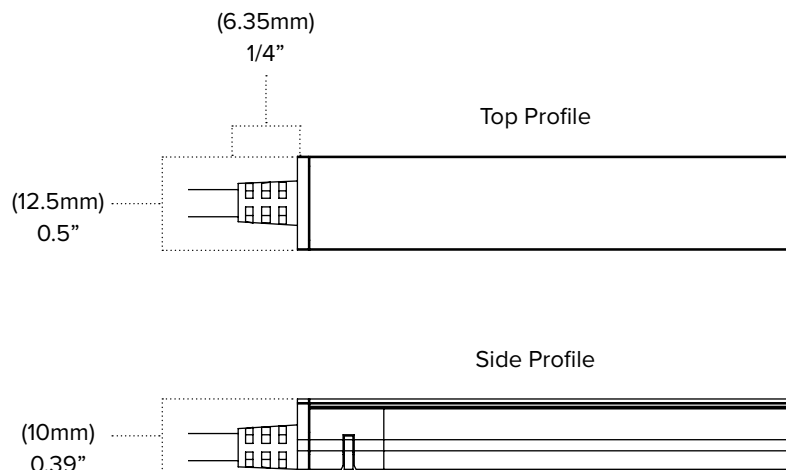

## Ordering Information

### MicroLink

PRODUCT   - CCT 30

MLINK6 = 6"  
MLINK16 = 16"  
MLINK22 = 22"  
MLINK32 = 32"

### MicroLink fixtures include:

- (1) Attached 6" Female DC Power Connection
- (2) Mounting clips with screws
- (1) end cap











Example Part # **MLINK16-30**

MLINK16 - 30

## Recommended Power Supplies

Part Number	Description	Finish	Application	Primary & Secondary	Total Wattage	Listing	Dimensions
PS Plug-in Drivers	24V DC Plug-In power supplies	Dark Bronze	Dry location	120V AC	150 x 2	cETLus	7-3/8"L x 2-1/8"W x 1"H
ADPT-DRJ Drivers	24V DC hardwire power supplies - use with DC-HW accessory or MLINK-CONKIT	White					
DC-HW	2-wire DC adapter cable - Bare wire to Male DC	Black			-	-	

## Accessories

Image	Item Number	Description
	MLINK-CLIP-4	4" ALUMINUM MOUNTING CLIPS
	MLINK-CONKIT	DC Power Connection with screw-on terminal port female DC end and 36" 22AWG wire; mates to MLINK; For use with plug-in or hardwire drivers
	MLINK-END	END CAP
	MLINK-JUMP-6	6" JUMPER
	MLINK-JUMP-12	12" JUMPER
	MLINK-JUMP-24	24" JUMPER
	MLINK-JUMP-36	36" JUMPER
	MLINK-L	L CONNECTOR LEFT
	MLINK-R	L CONNECTOR RIGHT
	MLINK-TL	T CONNECTOR LEFT
	MLINK-TR	T CONNECTOR RIGHT
	MLINK-TM	T CONNECTOR MIDDLE
	MLINK-X	CROSS CONNECTOR