

\land AMERICAN LIGHTING

BRIO 5CCT Adjustable 5CCT Downlight

A favorite for residential and commercial applications, the Brio 5CCT becomes a 5-in-1 fixture with 5 selectable white color temperatures. With up to 900 lumen output performance and available in 4" and 6" remodel trim sizes, the Brio provides an ideal solution for tight spaces with its small height and included remote junction box.

PROJECT:	
	_
TYPE:	
	_
LOCATION:	
	_
CATALOG NUMBER:	

- Excellent color rendering (90+ CRI)
- Five Selectable color temperatures: 2700K / 3000K / 3500K / 4000K / 5000K
- Lumen output up to 900 Lumens
- Dimmable with most TRIAC/CL/ELV Dimmers
- Remote driver with hardwire junction box .
- Spring loaded mounting clips
- Type IC and cETLus Listed for wet locations
- 50,000 hours rated life
- · ENERGY STAR certified
- JA8 Compliant





BRIO 5CCT

BRIO 5CCT SERIES QUICK SPECS

VOLTAGE	120V AC, 60Hz				
WATTAGE	9W / 12W				
LUMENS	600Lm / 900Lm				
CCT OPTIONS	2700K / 3000K / 3500K / 4000K / 5000K				
CRI	90+				
MOUNTING	Remodel Recessed mount				
DIMMING	TRIAC / CL / ELV (10 - 100%)				
BEAM ANGLE	110°				
OPERATING TEMP	-13°F (-25°C) to +113°F (+45°C)				
CERTIFICATIONS	cETLus Listed - Wet Location - Type IC				
RATED LIFE	50,000 Hours				


*LUMENS LISTED BASED ON 4000K CCT SETTING


BRIO 5CCT SERIES ORDERING INFORMATION


ITEM NUMBER	DESCRIPTION	FINISH	VOLTAGE	ССТ	CRI	LUMENS	WATTAGE	DIMMING
BRD4-5CCT-RD	4" Brio 5CCT	White	120V	5CCT	90+	600Lm	9W	10-100%
BRD6-5CCT-RD	6" Brio 5CCT	White	120V	5CCT	90+	900Lm	12W	10-100%



BRIO 5CCT SERIES QUICK DIMENSIONS AD56

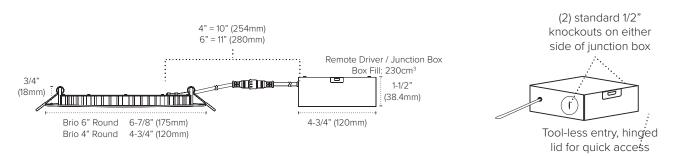



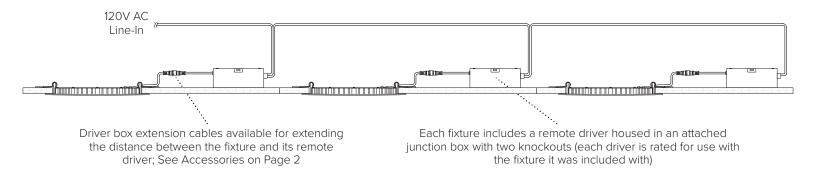

BRIO 5CCT SERIES ACCESSORIES

Image	Part Number	Description
100	RP-2/4/6	Steel rough-in plate w/hangar bars for 2"/ 4" / 6" use