




Features

- Excellent color rendering (94+ CRI)
- RGBW color mixing capability
- Up to 240 lumens per foot performance
- Consumes up to 4.4 watts per foot
- Cuttable every 6.56"
- 22 foot max run
- (IP54) unjacketed or (IP65) jacketed versions
- 50,000 hours rated life

Available CCT



RGBW

Control Options

- Trulux RGB+WW Controls
 - Requires Adaptive Driver + Trulux Receiver
- Trulux DMX Controls
 - Requires Adaptive Driver + Trulux DMX Receiver
- Auxiliary DMX Controls
 - Requires Adaptive Driver + Trulux DMX Receiver
- RGBW In-line Controller

Listing / Ratings




TRULUX™ RGBW - 24V

Alternating 3-in-1 LEDs with 3000K warm white LEDs provide a dynamic color range that extends passed traditional RGB. RGBW lighting combines RGB with white color mixing to create millions of color possibilities while maintaining even greater brightness and overall color saturation.

Technical Information

Series	HTL-RGBW / HTL65-RGBW
Input Voltage	24V
CCT	RGBW
CRI	94+
Wattage	up to 4.4W per ft
Lumens	up to 240Lm per ft
Max Run	22 ft
Cuttable	Every 6.56 in
IP Rating	IP54 (unjacketed) / IP65 (jacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

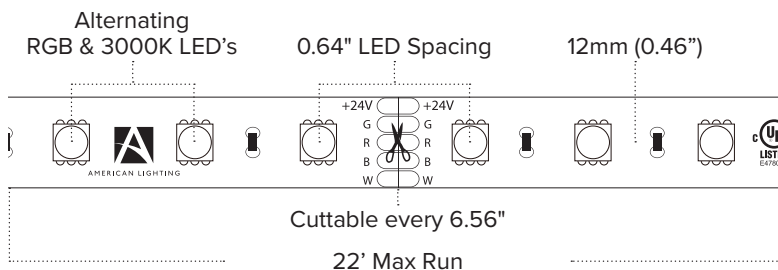

HTL-RGBW SERIES ORDERING INFORMATION

Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
HTL-RGBW	24V	RGBW	16.4 ft	240Lm / ft	4.4W / ft	IP54	94+	6.56" (167mm)
HTL65-RGBW	24V	RGBW	16.4 ft	240Lm / ft	4.4W / ft	IP65	94+	6.56" (167mm)
HTL-RGBW-CC	24V	RGBW	Custom Cut	240Lm / ft	4.4W / ft	IP54	94+	6.56" (167mm)
HTL-RGBW-100	24V	RGBW	100 ft	240Lm / ft	4.4W / ft	IP54	94+	6.56" (167mm)

HTL-RGBW (IP54) 16.4ft Reels include: Attached 3ft Lead Wires / (3) Standard Power Connectors

HTL-RGBW-100 Reels include: Attached 3ft Lead Wire / (5) HD Power Feeds

HTL65-RGBW (IP65) 16.4ft Reels include: Attached IP65 Power Feed / (3) HD Power Feeds / (3) HD Splice Connectors

RGBW ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-5PWR-HD	6" HD Power Feed
TL-5SPL-HD	HD Splice Connector
TL-5JUMP6-HD	6" HD Linking Cable
TL-5JUMP24-HD	24" HD Linking Cable
TL-5JUMP65-.5	6" Linking Cable (IP65)
TL-5JUMP65-1	12" Linking Cable (IP65)
TL-5JUMP65-2	24" Linking Cable (IP65)
WIRE-15-5PIN	15ft (20/5) Wire Spool
INLINE-RGBW-CTRL	Simple Select RGBW Controller
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



Building an RGBW Trulux System?

See pages (78-79) for compatible RGBW Trulux controllers & accessories

Trulux RGBW Control



3 Zone Touch Plate
RF Wall Controller
RF-RGBW-3Z



8 Zone Remote
RF Remote Control
RF-RGBW-3AAA



Trulux RF Receiver
(Required per zone)
REC-5A-4Z




3 Zone Touch Plate
DMX Wall Controller
DMX-3Z



Trulux DMX Receiver
(Required per zone)
REC-DMX-5A-4Z

Trulux RGBW Controller Set-up




RGBW Controller
(3 zone)



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Trulux RF Receiver
(Required per zone)



Trulux Tape Light