



Features

- Ready to install 24V tape light pro kit
- Available in 3000K warm white with 90+ CRI
- 335Lm per foot output performance
- Includes properly sized Adaptive power supply
- Maximum runs up to 27 feet
- Create power feeds and jumpers with the use of the 15ft (20/2) wire and HD Connectors
- Dimmable with most TRIAC and ELV dimmers
- cULus Listed (dry location)

Available CCT



3000K

Control Options

- Primary Side Dimming
- Trulux Single Color Controls
- Spektrum Smart Receiver (App Controlled)
- Single Color In-line Controller

Listing / Ratings





TRULUX™ High Output HD Pro Kit - 24V

Designed for lighting professionals, Pro Tape Light Kits contain all of the essential installation components needed for basic single color linear lighting systems - just add a controller or dimmer and you're all set. Speed installations by taking out the guess work and questioning compatibility, thanks in part to including a properly sized Adaptive series driver and all necessary wiring accessories.

Technical Information

Series	HTLHD-PROKIT
Input Voltage	24V
CCT	3000K
CRI	90+
Wattage	3.65W per ft
Lumens	335Lm per ft
Max Run	27 ft
Cutttable	Every 1.51 in
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

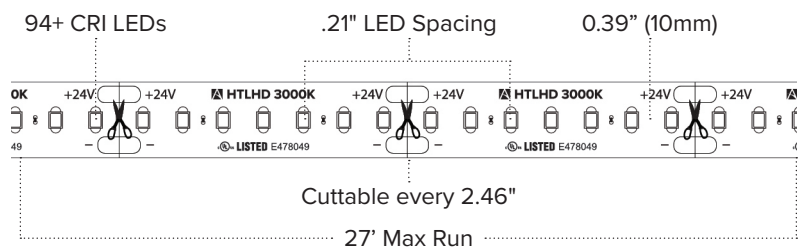



HTLHD PRO KIT
TRULUX TAPE LIGHT

TASK LIGHTING

DOWNLIGHTING

LINEAR LIGHTING

ARCHITECTURAL LIGHTING

POWER SUPPLIES



HTLHD PRO KIT ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
HTLHD-WW-PROKIT-16	24V	3000K	16.4 ft	335Lm / ft	3.65W / ft	IP54	90+	1.51" (38.4mm)

HTLHD Kits include: (1) 16.4ft Reel of Tape Light / (1) 24V ADPT 96W Power Supply / (1) 15ft (20/2) Wire Spool / (3) HD Power Feeds / (3) HD Splice Connectors

SINGLE COLOR ACCESSORIES


ITEM NUMBER	DESCRIPTION
TL-CONKIT	Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	HD Power Feed
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
WIRE-15-2PIN	15ft (20/2) Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
LVSB-2PIN	In-line Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



Building a Single Color Trulux System?

See pages (52-53) for compatible single color Trulux controllers & accessories

Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Trulux Tape Light