

Features

- Excellent color rendering (90+ CRI)
- Adjustable CCT from 2700K to 6000K
- Up to 510 lumens per foot performance
- Consumes up to 7 watts per foot
- Cuttable every 3.94"
- 13.1 foot max run
- (IP54) unjacketed
- 50,000 hours rated life

Available CCT



2700K-6000K
Tunable CCT

Control Options

- Trulux Tunable CCT Controls
 - Requires Adaptive Driver + Trulux Receiver
- Trulux DMX Controls
 - Requires Adaptive Driver + Trulux DMX Receiver
- Auxiliary DMX Controls
 - Requires Adaptive Driver + Trulux DMX Receiver
- Tunable In-line Controller

Listing / Ratings





TRULUX™ Tunable Spec Grade - 24V

For high performance applications, use Tunable Spec Grade, which offers up to 510 lumens of 2700K to 6000K light per foot. Adjust and modify any space's look with full-range white light tuning with the high CRI that Trulux provides. Trulux wall controls and remote controls deliver convenient tuning and dimming for a custom system.

Technical Information

Series	SPTL-TW
Input Voltage	24V
CCT	2700K-6000K Tunable CCT
CRI	90+
Wattage	Up to 7W per ft
Lumens	Up to 510Lm per ft
Max Run	13.1 ft
Cuttable	Every 3.94 in
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

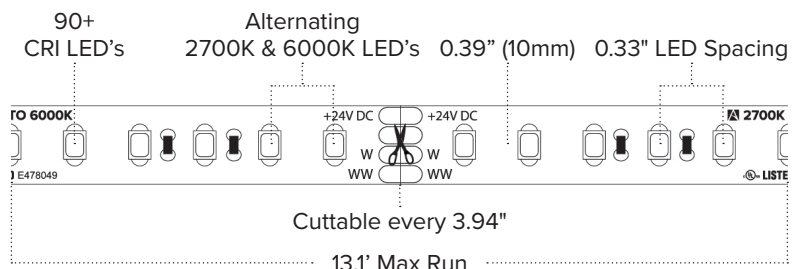



TUNABLE SPEC GRADE
TRULUX TAPE LIGHT™


SPTL-TW SERIES ORDERING INFORMATION *Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery*

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
SPTL-TW	24V	2700K-6000K	13.1 ft	510Lm / ft	7W / ft	IP54	90+	3.94" (100mm)
SPTL-TW-CC	24V	2700K-6000K	Custom Cut	510Lm / ft	7W / ft	IP54	90+	3.94" (100mm)

SPTL-TW (IP54) 13.1ft Reels include: Attached 3ft Lead Wire / (3) HD Power Feeds / (3) HD Splice Connectors

TUNABLE ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-4PWR-HD	6" HD Power Feed (IP54)
TL-4SPL-HD	HD Splice (IP54)
TL-4JUMP6-HD	6" HD Linking Cable (IP54)
TL-4JUMP24-HD	24" HD Linking Cable (IP54)
WIRE-15-4PIN	15ft (20/4) Wire Spool
INLINE-TW-CTRL	Simple Select In-line Controller (Tunable)
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

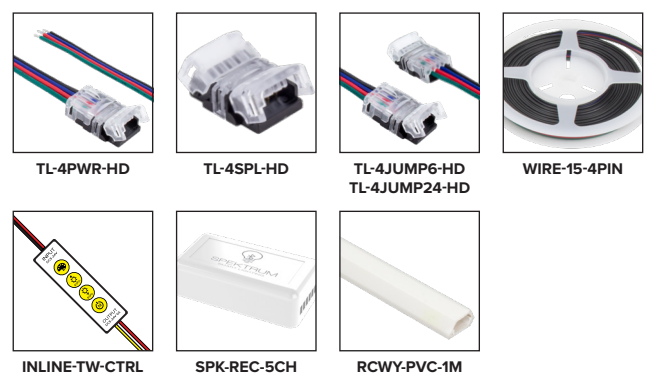

Building a Tunable CCT Trulux System?

See pages (64-65) for compatible Tunable CCT Trulux controllers & accessories

Trulux Tunable CCT Control



Single Zone Push Dial
Wireless RF Wall Controller
TWRF-BATT



4 Zone Touch Slide
DMX Wall Controller
DMX-TW-4Z




4 Zone Remote
RF Remote Control
TWRF-3AAA



Trulux RF Receiver
(Required per zone)
REC-5A-4Z

Trulux Tunable CCT Set-up



Push Dial Controller
(Single zone)



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)




Trulux RF Receiver
(Required)




Trulux Tape Light

Smart Receiver Set-up



Smart Device

and / or



Smart Switch
Control



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Smart Receiver



24V Tape Light

TASK LIGHTING

DOWNLIGHTING

LINEAR LIGHTING

ARCHITECTURAL LIGHTING

POWER SUPPLIES