

# MVP 5CCT PUCK

## 120V Puck Light

Long run lengths and field-adjustable color temperature render the MVP 5CCT Puck versatile and virtually unlimited in a wide range of applications — task, areas, display shelving, back bars, built-ins, etc. Minimalism in form factor and surface or recessed mount allows for more obscurity where necessary. With 12” and 24” linking cables, this plug-and-play solution to task lighting provides the contractor and customer the ultimate tool for illuminating important tasks or treasured articles.

- Available in field-switchable 5CCT (2700K | 3000K | 3500K | 4000K | 5000K)
- High color rendering index of 90+ CRI
- 120V AC input
- Low power consumption at 4W per puck
- Surface mount low profile and recessed mount
- 35,000 hour rated life
- cETLus listed for dry locations



### MVP 5CCT PUCK QUICK SPECS

<b>VOLTAGE</b>	120V AC
<b>WATTAGE</b>	4W
<b>LUMENS</b>	Up to 230Lm
<b>CCT</b>	5CCT (2700K   3000K   3500K   4000K   5000K)
<b>CRI</b>	90+
<b>MAX RUN</b>	20 pucks
<b>DIMMING</b>	10-100% (TRIAC   ELV)
<b>BEAM ANGLE</b>	120°
<b>MOUNTING</b>	Surface or recessed
<b>RATING</b>	cETLus Listed, dry locations
<b>RATED LIFE</b>	35,000 Hours


\*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers.

\*\*Lumens listed based on 4000K CCT setting

PROJECT:
TYPE:
LOCATION:
CATALOG NUMBER:



### MVP 5CCT QUICK DIMENSIONS

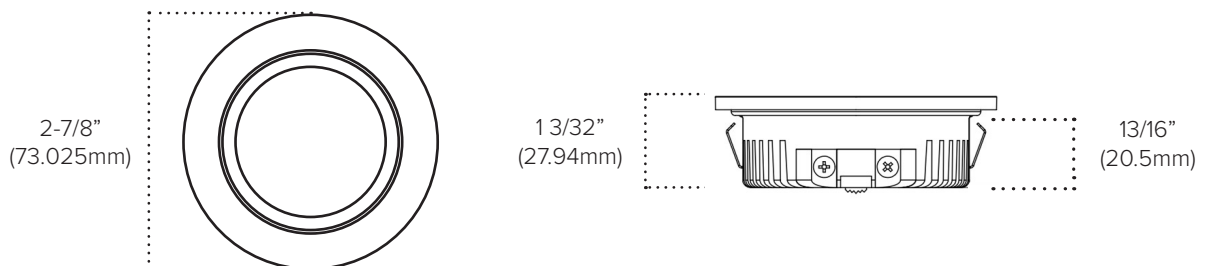


**MVP ORDERING INFORMATION**

ITEM NUMBER NAME	VOLTAGE	CCT	LUMENS	WATTAGE
MVP-1-5CCT-WH	120V	2700K   3000K   3500K   4000K   5000K	230Lm	4.3W
MVP-1-5CCT-BK	120V	2700K   3000K   3500K   4000K   5000K	230Lm	4.3W
MVP-1-5CCT-WH-B	120V	2700K   3000K   3500K   4000K   5000K	230Lm	4.3W
MVP-1-5CCT-BK-B	120V	2700K   3000K   3500K   4000K   5000K	230Lm	4.3W

Single Puck Kits Include: (1) Puck with 6" lead wire, (1) 6' power cord with roll switch, Mounting screws

**MVP 5CCT INSTALLATION RECOMMENDATION**

Daisy Chain Installation

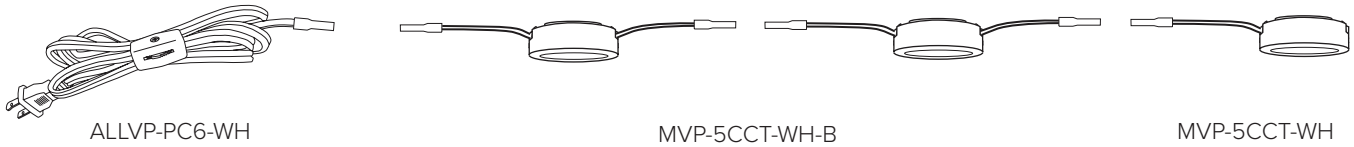

**MVP 5CCT ACCESSORIES**

PART NUMBER	DESCRIPTION
ALLVP-PC6	6ft Black 120V Power Cable + Plug w/ Inline Rotary Switch
ALLVP-PC6-WH	6ft White 120V Power Cable + Plug w/ Inline Rotary Switch
ALLVPEX12	1ft Black Linking cable; 18AWG wire with male/female connectors
ALLVPEX24	2ft Black Linking cable; 18AWG wire with male/female connectors
ALLVPEX12WH	1ft White Linking cable; 18AWG wire with male/female connectors
ALLVPEX24WH	2ft White Linking cable; 18AWG wire with male/female connectors



ALLVP-PC6



ALLVP-PC6-WH



ALLVPEX BLACK



ALLVPEX WHITE

**RECOMMENDED POWER SUPPLIES**

PART NUMBER	DESCRIPTION	FINISH	APPLICATION	PRIMARY & SECONDARY	TOTAL WATTAGE	LISTING	DIMENSIONS
ALLSBOX	Slimline Hardwire Box with (2) Molex outlets and On/Off switch;	Black	Dry location	120V AC	86 x 2 (5A Max)	cURus	4"x2.5"x1"
ALLSBOX-WH-B	(Required for Hardwire operation)	White	Dry location	120V AC	86 x 2 (5A Max)	cURus	4"x2.5"x1"
ALLVP-PC6	6ft power cord with slide on plug, roll switch, and female plug	Black	Dry location	120V AC	86	cULus	6ft length
ALLVP-PC6-WH		White	Dry location	120V AC	86	cULus	6ft length



# AMERICAN LIGHTING WARRANTY

## LIMITED WARRANTY FOR LED PRODUCTS: 3 YEARS

### LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

### PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit [www.americanlighting.com](http://www.americanlighting.com). Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

### AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.