

LED CHANNEL RAYS

RGBW Stranded Channel Ray Modules

Channel Ray LED Modules are designed to be a versatile solution for sign and display lighting applications. With high quality optics, each module creates broad, uniform illumination without hotspots. 3M™ adhesive backing simplifies set up and take down for temporary applications like trade show displays.

- Adhesive backing allows for easy, secure installation
- Maximum runs up to 20 modules
- IP65 rating - suitable for wet locations
- cURus recognized
- 50,000 hours rated life
- 20 modules per string



RGBW CHANNEL RAYS QUICK SPECS

VOLTAGE	12V DC
WATTAGE	0.96W per module
LUMENS	100Lm per module
CCT OPTIONS	RGBW
CRI	70+
MOUNTING	Surface mount via 3M® Tape
DIMMING	Non-Dimmable
BEAM ANGLE	170°
OPERATING TEMP	-25°C (13°F) to 60°C (140°F)
CERTIFICATIONS	cETLus Listed - Wet Locations - IP65 Housing
RATED LIFE	50,000 Hours


PROJECT:
TYPE:
LOCATION:
CATALOG NUMBER:



RGBW CHANNEL RAYS ORDERING INFORMATION


ITEM NUMBER	STRING LENGTH	MODULES PER STRING	LEDS PER MODULE	MODULE SPACING	VOLTAGE	CCT	CRI	LUMENS	WATTAGE PER MODULE
CR3-12VDC-RGBW-5-20	143.18"	20	3	3.39" (86mm)	12V DC	RGBW	70+	100Lm	0.96W

RGBW CHANNEL RAYS QUICK DIMENSIONS

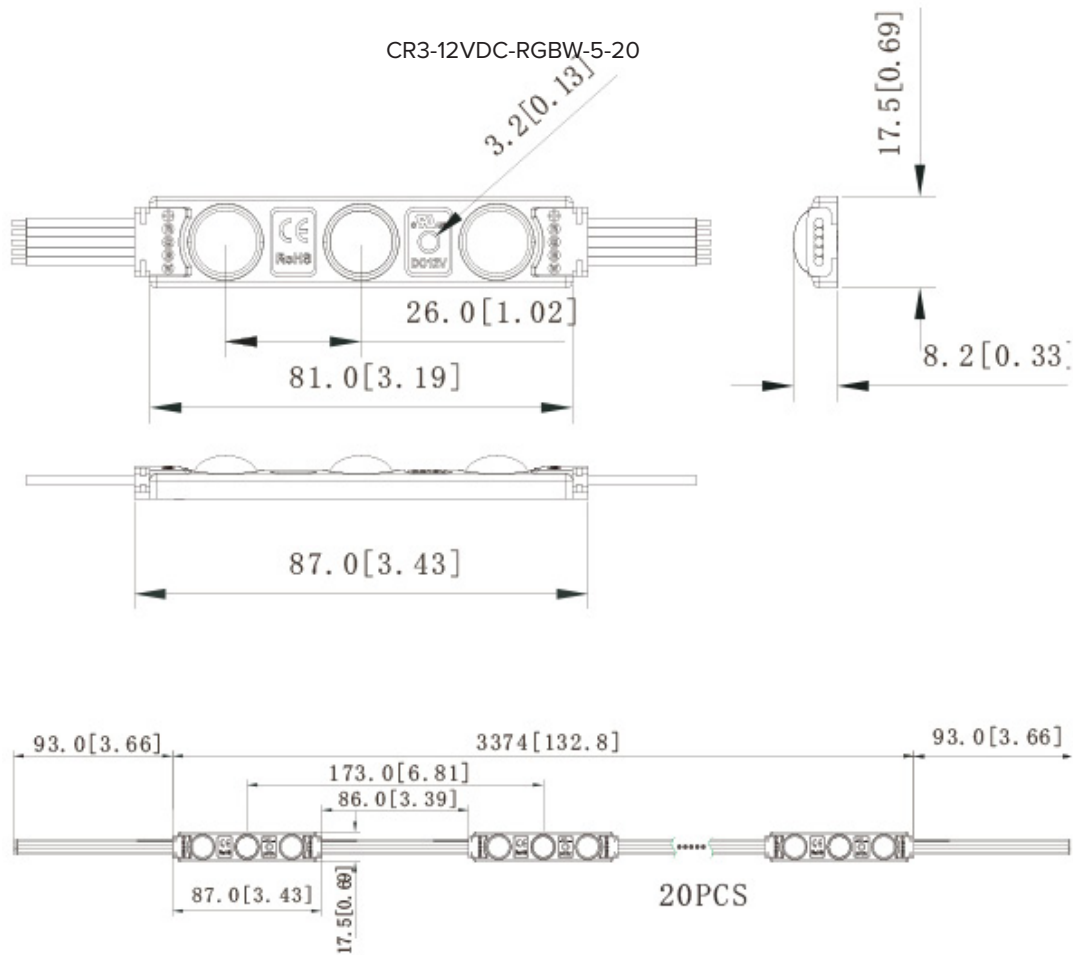

RGBW CHANNEL RAYS ACCESSORIES

ITEM NUMBER	DESCRIPTION
WIRE-CMP-100-6PIN	100' (16/6) In-wall Rated Wire Spool
INLINE-RGBW-CTRL	Simple Select In-line Controller (RGBW)
SPKPL-REC-TB-5CH	Spektrum+™ Smart Receiver (App Controlled)
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

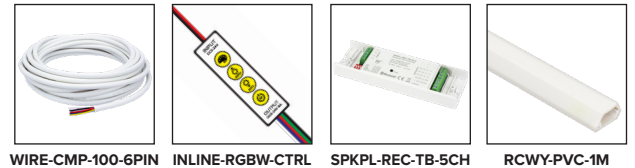

RGBW CHANNEL RAYS QUICK SET-UP

