

STLHD SERIES TAPE LIGHT

24V DC Standard Grade (HD) High Density

High Density (HD) tape light features highly efficient and compact LED chip sets that allow for tighter spacing without sacrificing lumen loss and more precise cutting increments for greater customization with run lengths up to 32.8 feet.

- High Density (HD) LED spacing in Standard Grade Output
- Available in 2700K, 3000K, 3500K, 4000K, and 5000K
- 90+ color rendering index
- Lumen output ranging from 200Lm to 235Lm per foot
- Cuttable every 2.46" with 32.8ft max run
- Easy installation featuring 3M VHB adhesive backing
- Available in IP54 coated and IP65 Jacketed
- Dimmable (5-100%) with most ELV, TRIAC dimmers
- cULus Listed for indoor dry/damp locations
- 50,000 hours rated life
- Suitable for use in closets when used in an enclosed extrusion based on NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5)



PROJECT: _____

TYPE: _____

LOCATION: _____

CATALOG NUMBER: _____



STLHD SERIES QUICK SPECS


VOLTAGE	24V DC
WATTAGE	2.19W / ft
LUMENS	Up to 235Lm / ft
CCT OPTIONS	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90+
MAX RUN	32.8ft
CUTTING POINTS	2.46" (62.5mm)
IP RATING	IP54 - Coated
DIMMING	TRIAC / ELV (5 - 100%)
DIMENSIONS	0.39" (10mm) W x 0.06" (1.65mm) H
BEAM ANGLE	120°
OPERATING TEMP	5°C (41°F) to 70°C (158°F)
CERTIFICATIONS	cULus Listed - Dry / Damp Location
RATED LIFE	50,000 Hours

STLHD SERIES IP RATINGS

- IP54 (Coated)**
 Features a light nano-coating applied to the tape light and LED's that protects from moisture and dust.
Best suited: Indoor dry & damp locations
- IP65 (Jacketed)***
 Features a clear protective silicone jacketing that protects the tape light from sprayed water and dust.
Best suited: Indoor & Outdoor damp & wet locations

*Not suitable for exposure to chemicals or salt.

STLHD SERIES QUICK LOOK

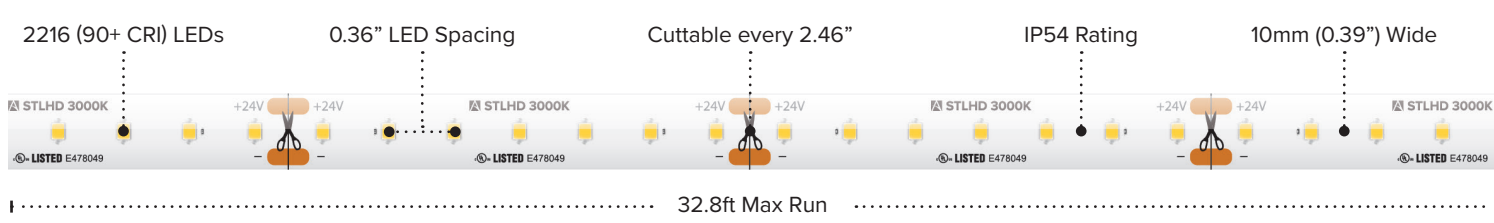

STLHD SERIES ORDERING INFORMATION *Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery*


ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
STLHD-UWW-16	24V DC	2700K	16.4 ft	200Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-UWW-16	24V DC	2700K	16.4 ft	190Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft
STLHD-UWW-100	24V DC	2700K	100 ft	200Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD-UWW-CC	24V DC	2700K	Custom Cut*	200Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-UWW-CC	24V DC	2700K	Custom Cut*	190Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft
STLHD-WW-16	24V DC	3000K	16.4 ft	210Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-WW-16	24V DC	3000K	16.4 ft	190Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft
STLHD-WW-100	24V DC	3000K	100 ft	210Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD-WW-CC	24V DC	3000K	Custom Cut*	210Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-WW-CC	24V DC	3000K	Custom Cut*	190Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft
STLHD-NW-16	24V DC	3500K	16.4 ft	220Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-NW-16	24V DC	3500K	16.4 ft	210Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft
STLHD-NW-100	24V DC	3500K	100 ft	220Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD-NW-CC	24V DC	3500K	Custom Cut*	220Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-NW-CC	24V DC	3500K	Custom Cut*	210Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft
STLHD-WH-16	24V DC	4000K	16.4 ft	235Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-WH-16	24V DC	4000K	16.4 ft	225Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft
STLHD-WH-100	24V DC	4000K	100 ft	235Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD-WH-CC	24V DC	4000K	Custom Cut*	235Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-WH-CC	24V DC	4000K	Custom Cut*	225Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft
STLHD-CW-16	24V DC	5000K	16.4 ft	230Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-CW-16	24V DC	5000K	16.4 ft	220Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft
STLHD-CW-100	24V DC	5000K	100 ft	230Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD-CW-CC	24V DC	5000K	Custom Cut*	230Lm / ft	2.19W / ft	IP54	90+	2.46" (62.5mm)	32.8 ft
STLHD65-CW-CC	24V DC	5000K	Custom Cut*	220Lm / ft	2.19W / ft	IP65	90+	2.46" (62.5mm)	32.8 ft

16.4ft Reels (IP54) Include: Attached 6ft Lead Wire / (3) TL-CONKIT / (3) TL-BLKS / (3) TL-2PWR-HD
 16.4ft Reels (IP65) Include: Attached 2ft IP65 Lead Wire +6" Conkit / Attached 2ft IP65 Tail Wire +6" Conkit / (3) HD Power Feeds (IP20)
 100ft Reels (IP54) Include: Attached 6ft Lead Wire / (5) TL-CONKIT / (5) TL-BLKS / (5) TL-2PWR-HD
 Custom Cut: Order (1) **CONKIT-CC** Assembly Fee per length of tape; IP54 includes 3ft soldered lead wire and shrink tube cover - for additional wire, add (1) TL-WIRE per ft; IP65 includes 2ft IP65 Lead Wire +6" Conkit (no additional wire available for IP65 cuts)

*Custom Cut Lengths must be calculated in 2.46" increments (Min 1ft / Max. 32.8ft). See page 3 for cut increment guide.

STLHD SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	6' Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6' HD Power Feed (IP54)
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2SPL-L-HD	90° "L" HD Tape to Tape Splice Connector (IP54)
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100ft (16/3) In-wall Rated Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
LVSB-2PIN	In-Line Splice Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway (White)

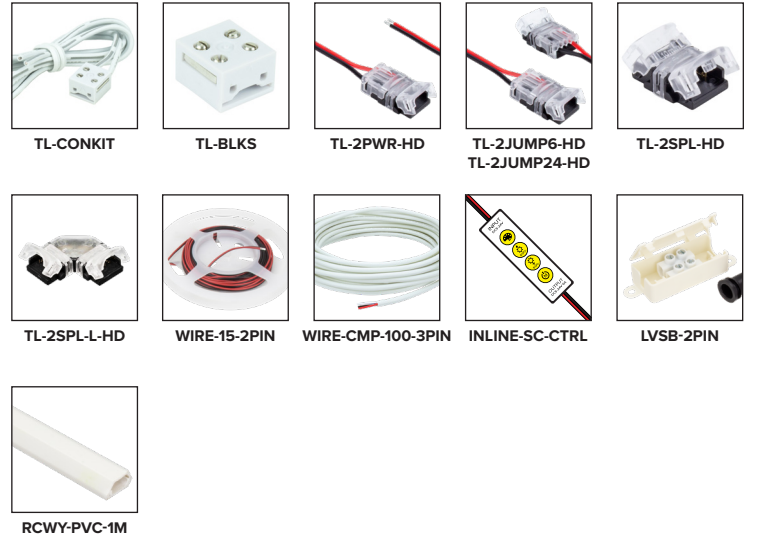

RECOMMENDED POWER SUPPLIES

ITEM NUMBER	DESCRIPTION	MAX / MIN LOAD	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMMABLE	DIMENSIONS
ADPT-DRJ-30-24	Adaptive Series 30W	30W / 3W	100-277V AC	24V DC	Yes*	6.49"L x 3.6"W x 1.02"H
ADPT-DRJ-60-24	Adaptive Series 60W	60W / 6W	100-277V AC	24V DC	Yes*	7.4"L x 3.6"W x 1.02"H
ADPT-DRJ-96-24	Adaptive Series 96W	96W / 9.6W	100-277V AC	24V DC	Yes*	8.66"L x 3.6"W x 1.61"H
ADPT-DRJ-192-24	Adaptive Series 192W (2 x 96W)	192W / 19.2W	100-277V AC	24V DC	Yes*	10.94"L x 4.25"W x 1.8"H
ADPT-DRJ-288-24	Adaptive Series 288W (3 x 96W)	288W / 28.8W	100-277V AC	24V DC	Yes*	11.85"L x 4.25"W x 1.8"H

Phase Dimming Compatible With Most MLV, ELV, and TRIAC Dimmers

STLHD SERIES CUT INCREMENT GUIDE

Segment	Length (MM)	Length (Inch)	Length (Feet)	Segment	Length (MM)	Length (Inch)	Length (Feet)	Segment	Length (MM)	Length (Inch)	Length (Feet)	Segment	Length (MM)	Length (Inch)	Length (Feet)
1	62.5	2.46	0.21	41	2562.5	100.86	8.41	81	5062.5	199.26	16.61	121	7562.5	297.66	24.81
2	125	4.92	0.41	42	2625	103.32	8.61	82	5125	201.72	16.81	122	7625	300.12	25.01
3	187.5	7.38	0.62	43	2687.5	105.78	8.82	83	5187.5	204.18	17.02	123	7687.5	302.58	25.22
4	250	9.84	0.82	44	2750	108.24	9.02	84	5250	206.64	17.22	124	7750	305.04	25.42
5	312.5	12.3	1.03	45	2812.5	110.7	9.23	85	5312.5	209.1	17.43	125	7812.5	307.5	25.63
6	375	14.76	1.23	46	2875	113.16	9.43	86	5375	211.56	17.63	126	7875	309.96	25.83
7	437.5	17.22	1.44	47	2937.5	115.62	9.64	87	5437.5	214.02	17.84	127	7937.5	312.42	26.04
8	500	19.68	1.64	48	3000	118.08	9.84	88	5500	216.48	18.04	128	8000	314.88	26.24
9	562.5	22.14	1.85	49	3062.5	120.54	10.05	89	5562.5	218.94	18.25	129	8062.5	317.34	26.45
10	625	24.6	2.05	50	3125	123	10.25	90	5625	221.4	18.45	130	8125	319.8	26.65
11	687.5	27.06	2.26	51	3187.5	125.46	10.46	91	5687.5	223.86	18.66	131	8187.5	322.26	26.86
12	750	29.52	2.46	52	3250	127.92	10.66	92	5750	226.32	18.86	132	8250	324.72	27.06
13	812.5	31.98	2.67	53	3312.5	130.38	10.87	93	5812.5	228.78	19.07	133	8312.5	327.18	27.27
14	875	34.44	2.87	54	3375	132.84	11.07	94	5875	231.24	19.27	134	8375	329.64	27.47
15	937.5	36.9	3.08	55	3437.5	135.3	11.28	95	5937.5	233.7	19.48	135	8437.5	332.1	27.68
16	1000	39.36	3.28	56	3500	137.76	11.48	96	6000	236.16	19.68	136	8500	334.56	27.88
17	1062.5	41.82	3.49	57	3562.5	140.22	11.69	97	6062.5	238.62	19.89	137	8562.5	337.02	28.09
18	1125	44.28	3.69	58	3625	142.68	11.89	98	6125	241.08	20.09	138	8625	339.48	28.29
19	1187.5	46.74	3.90	59	3687.5	145.14	12.10	99	6187.5	243.54	20.30	139	8687.5	341.94	28.50
20	1250	49.2	4.10	60	3750	147.6	12.30	100	6250	246	20.50	140	8750	344.4	28.70
21	1312.5	51.66	4.31	61	3812.5	150.06	12.51	101	6312.5	248.46	20.71	141	8812.5	346.86	28.91
22	1375	54.12	4.51	62	3875	152.52	12.71	102	6375	250.92	20.91	142	8875	349.32	29.11
23	1437.5	56.58	4.72	63	3937.5	154.98	12.92	103	6437.5	253.38	21.12	143	8937.5	351.78	29.32
24	1500	59.04	4.92	64	4000	157.44	13.12	104	6500	255.84	21.32	144	9000	354.24	29.52
25	1562.5	61.5	5.13	65	4062.5	159.9	13.33	105	6562.5	258.3	21.53	145	9062.5	356.7	29.73
26	1625	63.96	5.33	66	4125	162.36	13.53	106	6625	260.76	21.73	146	9125	359.16	29.93
27	1687.5	66.42	5.54	67	4187.5	164.82	13.74	107	6687.5	263.22	21.94	147	9187.5	361.62	30.14
28	1750	68.88	5.74	68	4250	167.28	13.94	108	6750	265.68	22.14	148	9250	364.08	30.34
29	1812.5	71.34	5.95	69	4312.5	169.74	14.15	109	6812.5	268.14	22.35	149	9312.5	366.54	30.55
30	1875	73.8	6.15	70	4375	172.2	14.35	110	6875	270.6	22.55	150	9375	369	30.75
31	1937.5	76.26	6.36	71	4437.5	174.66	14.56	111	6937.5	273.06	22.76	151	9437.5	371.46	30.96
32	2000	78.72	6.56	72	4500	177.12	14.76	112	7000	275.52	22.96	152	9500	373.92	31.16
33	2062.5	81.18	6.77	73	4562.5	179.58	14.97	113	7062.5	277.98	23.17	153	9562.5	376.38	31.37
34	2125	83.64	6.97	74	4625	182.04	15.17	114	7125	280.44	23.37	154	9625	378.84	31.57
35	2187.5	86.1	7.18	75	4687.5	184.5	15.38	115	7187.5	282.9	23.58	155	9687.5	381.3	31.78
36	2250	88.56	7.38	76	4750	186.96	15.58	116	7250	285.36	23.78	156	9750	383.76	31.98
37	2312.5	91.02	7.59	77	4812.5	189.42	15.79	117	7312.5	287.82	23.99	157	9812.5	386.22	32.19
38	2375	93.48	7.79	78	4875	191.88	15.99	118	7375	290.28	24.19	158	9875	388.68	32.39
39	2437.5	95.94	8.00	79	4937.5	194.34	16.20	119	7437.5	292.74	24.40	159	9937.5	391.14	32.60
40	2500	98.4	8.20	80	5000	196.8	16.40	120	7500	295.2	24.60	160	10000	393.6	32.80



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 5 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary.

LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.