



**MADERA™ 16-1/8" HEIGHT 10" ROUGH TOILET**

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- Elongated bowl
- Fully glazed 2" ballpass trapway
- 10" x 12" water surface area
- Direct-fed siphon jet action
- 10" Rough-in
- 1-1/2" inlet spud
- 2 bolt caps
- 100% factory flush tested

- 2305.100** Top spud
- 2305.156** Top spud with slotted rim for bedpan holding

**Compliance Certifications -**


**Meets or Exceeds the Following Specifications:**

- ASME A112.19.2M (and 19.6M) for Vitreous China Fixtures - includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions

Nominal Dimensions: 778 x 381 x 409mm (30-1/2" x 15" x 16-1/8")

Fixture only, seat and flush valve by others.

Recommended working pressure--between 25 psi at valve when flushing and 80 psi static

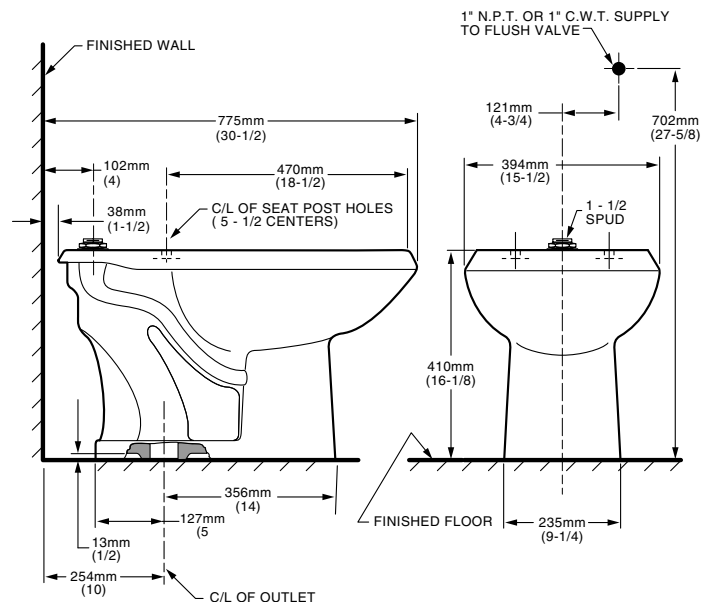

**NOTES:**  
 TO COMPLY WITH AREA CODE GOVERNING THE HEIGHT OF VACUUM BREAKER ON THE FLUSH VALVE, THE PLUMBER MUST VERIFY DIMENSIONS SHOWN FOR SUPPLY ROUGH-IN.  
 THIS TOILET DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 254MM (10") FROM FINISHED WALL TO C/L OF OUTLET.  
 FLUSH VALVE NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.  
 IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2  
 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

**To Be Specified**

- Color:  White  Bone  Silver  Shell  Black
- Seat: Olsonite #95 open front seat less cover
- Seat: Church #9500C open front seat less cover
- Flush Valve: Sloan Royal #111 or equal



● When installed so top of seat is 432 to 483mm (17" to 19") from the finished floor.  
**MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES- CHECK LOCAL CODES.**