


# YORKVILLE ELONGATED PRESSURE-ASSISTED TOILET 1.6 gpf / 6.0 Lpf

**VITREOUS CHINA** 

# YORKVILLE ELONGATED PRESSURE-ASSISTED TOILET 1.6 gpf/ 6.0 Lpf

## 2876.016

- Vitreous china
- Floor-mounted, back-outlet toilet
- Low-consumption (1.6 gpf/6.0 Lpf)
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Elongated bowl
- Pressure-assisted siphon jet flush action
- Fully-glazed 2-1/8" trapway
- 10 x 12" water surface area
- Close-coupled Flushometer tank\*
- Metal chrome trip lever
- Speed Connect® tank/bowl coupling system
- Sanitary dam on bowl
- 4 bolt caps
- 100% factory flush tested



#### **Nominal Dimensions:**

752 x 516 x 742mm (29-3/4" x 20-1/2" x 29-1/4")

Fixture only, seat and supply by others

Recommended working pressure range 25 psi - 80 psi

#### **Alternate Configurations Available:**

- 4142.600 Tank and tank cover only with tank cover locking device
- 4142.800 Tank and tank cover only with right hand trip lever
- ☐ 4142.900 Tank complete with right hand trip lever and tank cover locking device

### Compliance Certifications -


### Meets or Exceeds the Following Specifications:

 ASME A112.19.2-2008 / CSH B45.1-08 for Vitreous China Fixtures

#### To Be Specified:

- □ Color: □ White □ Bone □ Linen
  - ☐ Silver ☐ Black
- ☐ Seat: American Standard #5324.019 "Rise and Shine" (with easy to clean lift-off hinge system) solid plastic closed front seat with cover.
- American Standard #5321.110 EverClean® seat with Slow Close snap-off hinges.
- ☐ Alternate Seat:
- ☐ Supply with Stop:



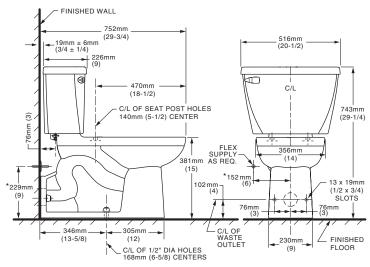

# NOTES: WASTE OUTLET SEAL RING MUST BE NEOPRENE OR GRAPHITE-

FELT (WAX RING NOT RECOMMENDED).
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

DISTANCE FROM FLOOR TO CLOSET FLANGE CENTERLINE (ROUGH-IN) MUST BE 4" (102 MM) WITH FLANGE SURFACE FLUSH TO 1/16" (1.5MM) MAX. BEYOND FINISHED WALL.

\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION
INSTRUCTIONS SUPPLIED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2-2008 / CSH B45.1-08. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.