


MODEL NUMBER:

- ❑ **3808.101 Single Control Lavatory**
Pop-up drain. Escutcheon (for mounting on 4" centers).
Decorative trim ring (for single hole mounting).

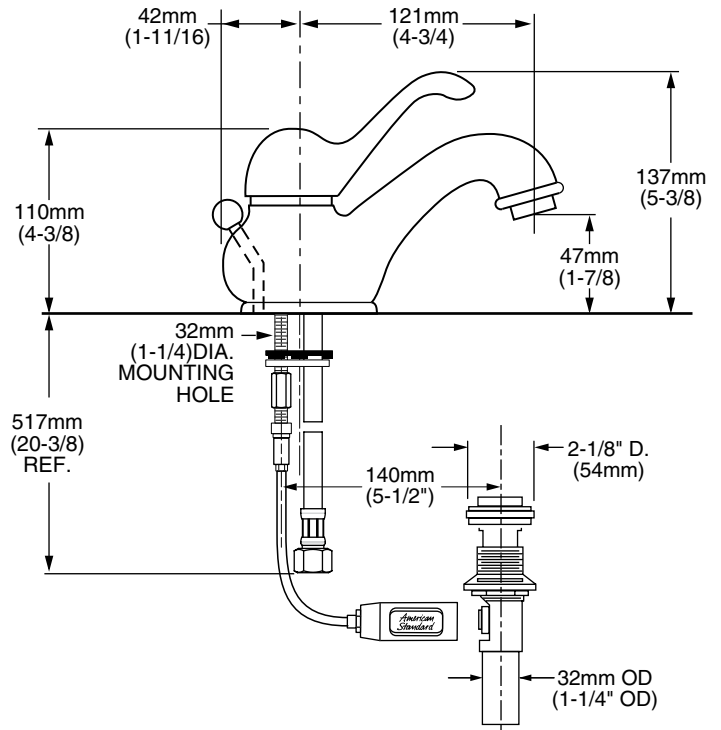

GENERAL DESCRIPTION:

Cast brass body. Metal Lever handle. Washerless 47mm ceramic disc valve cartridge. Equipped with a hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. Fitting can be mounted on 4" centers using supplied brass escutcheon or by single hole mounting method using supplied decorative ring. 20 inch (500mm) long flexible stainless steel drain cable is pre-assembled to spout. Metal Speed Connect® drain body with 1-1/4 inch (32mm) tail piece. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

- Brass Construction:** Durable. Easy to clean.
- Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance.
- Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.
- Low Lead:** Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.
- Exclusive Speed Connect Metal Drain:**
 - Fewer parts. Installs in less time.
 - No adjustments required - seals the first time, every time.
 - Flexible stainless steel cable - installs effortlessly in tight spaces.
- Choice of Finishes:** Wide range of durable finishes.

SUGGESTED SPECIFICATION:

Single control lavatory faucet shall feature a cast brass body and all metal handle. Shall also feature washerless ceramic disc valve cartridge. Fitting shall be equipped with a hot limit safety stop. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 3808.101.____.