


**MODEL NUMBER:**

- **3885F Widespread Lavatory**  
Speed Connect® pre-assembled drain.  
Lever handles. Polished Chrome finish.  
SKU# 137-324.

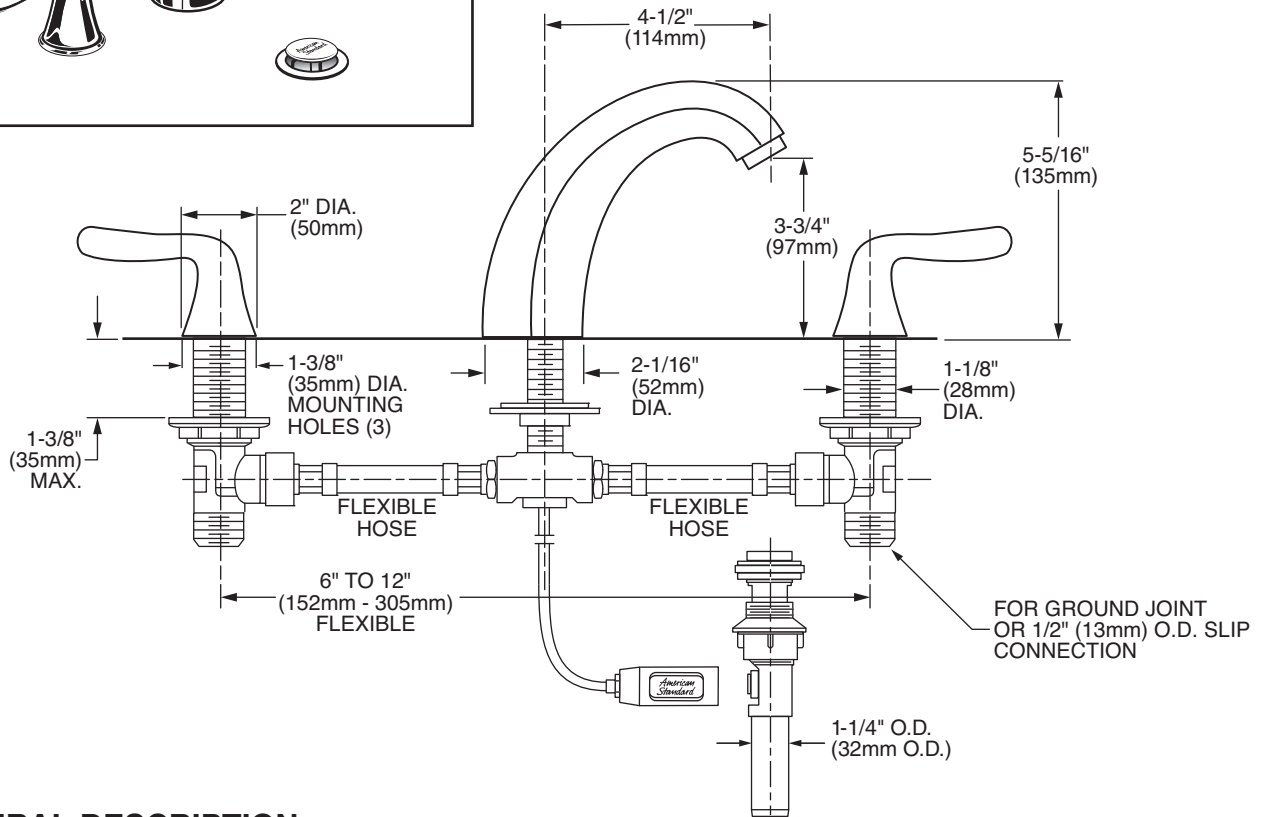

**GENERAL DESCRIPTION:**

Cast brass valve bodies with reinforced flexible hose connections for 6" to 12" (152mm to 305mm) installations. 1/4 turn washerless ceramic disc valve cartridges. One-half inch brass male inlets. 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Speed Connect® pre-assembled drain body with 1-1/4 inch (32mm) tail piece. 1.5 gpm/5.6L/min. maximum flow rate.

**PRODUCT FEATURES:**

**Speed Connect® Drain:**

- 1/3 the parts, installs in 1/3 the time.
- No tools or plumbers putty required for installation.
- No adjustments required - seals the first time, every time.
- Flexible stainless steel cable - installs effortlessly in tight spaces.

**Brass Construction:** Durable. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Smooth handle operation and assures a lifetime of drip-free performance.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.


**SUGGESTED SPECIFICATION:**

Dual control widespread lavatory faucet shall feature cast brass valve bodies with reinforced flexible hose connections for 6" to 12" installations. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 3885F, SKU# 137-324.


**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 61/Section 9**

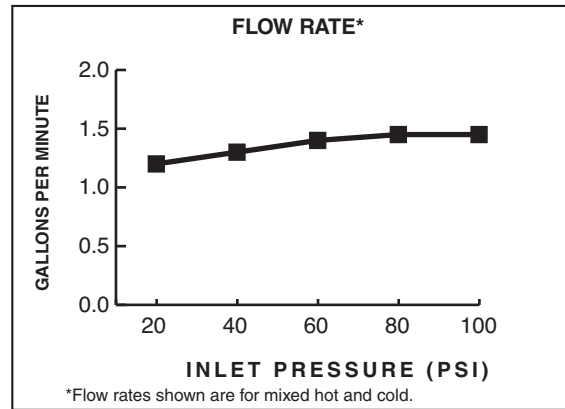

Product Number	Description
3885F	Lavatory faucet. Lever Handles. Speed Connect® pre-assembled drain. Polished Chrome finish. SKU# 137-324.

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.