American Standard

CADET® 3 RIGHT HEIGHT™ ELONGATED TOILET with the FLUSH RIGHT™ SYSTEM

VITREOUS CHINA

CADET® 3 RIGHT HEIGHT™ ELONGATED TOILET with the FLUSH RIGHT™ SYSTEM

2386.012

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- EverClean™ anti-microbial ceramic glaze
- Featuring the Flush Right™ System
- 16-1/2" rim height for accessible application
- Elongated siphon action jetted bowl
- Fully-glazed 2-1/8" trapway with 2" ball pass
- Generous 9" x 8" water surface area
- Close-coupled tank with flat tank cover for superior storage
- Oversized 3" flush valve with chemical resistant flapper
- Chrome trip lever
- New Speed Connect[™] tank-to-bowl coupling system
- New sanitary dam on bowl with four point tank stabilization
- 2 color-matched bolt caps
- 100% factory flush tested
- 3016.016 Right Height™ Elongated Bowl
 4021.016 Tank

Nominal Dimensions:

768 x 438 x 768mm (30-1/4" x 17-1/4" x 30-1/4")

Fixture only, seat and supply by others

Alternative Tank Configurations Available:

- 4021.500 Tank complete with Aquaguard Liner
 4021.600 Tank complete with tank cover locking device
- 4021.700 Tank complete with Aquaguard Liner and tank cover locking device
- ☐ 4021.800 Tank complete with trip lever located on right side
- 4021.900 Tank complete with tank cover locking device and trip lever located on right side

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions
- Los Angeles Department of Water and Power Supplementary Purchase Specification for Non-Adjustability

To Be Specified:

- □ Color: □ White □ Bone □ Silver □ Linen □ Black
- □ Seat: #5325.010 Elongated Champion® Slow Close solid plastic seat and cover with easy lift off feature
- □ Seat: #5284.016 Elongated EverCleanTM anti-microbial solid plastic seat and cover
- □ Seat: #5311.012 Elongated Laurel molded wood seat and cover
- ☐ Supply with stop:



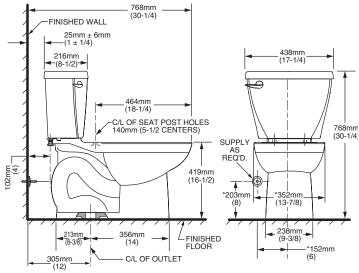

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided page



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

