American Standard

Aspirations[™] Under Counter Sink

□ 1607000 Under Counter Sink

- Rectangular under counter vitreous china sink
- Design coordinates with Aspirations collection
- Front overflow with center drain and unglazed rim
- Includes EverClean® antimicrobial surface
- Supplied with mounting kit and cutout template

Nominal Dimensions:

20" x 15-1/2" (506 x 392 mm)

Bowl size:

17" (433 mm) wide 12-9/16" (319 mm) front to back 4-1/2" (115 mm) deep

Compliance Certifications - Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

To Be Specified:

□ Color: □ White □ Faucet*: □ Faucet Finish:

□ Supplies:

□ 1-1/4" Trap:

* See faucet section for additional models available



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES. Install lavatory 864 mm (34") from finished floor. Lavatory installed 197 mm (7-3/4") minimum from front edge of countertop provides 686mm (27") knee clearance area.






SEE REVERSE FOR ROUGHING-IN DIMENSIONS



VITREOUS CHINA



Aspirations[™] **Under Counter Sink VITREOUS CHINA BARRIER FREE**

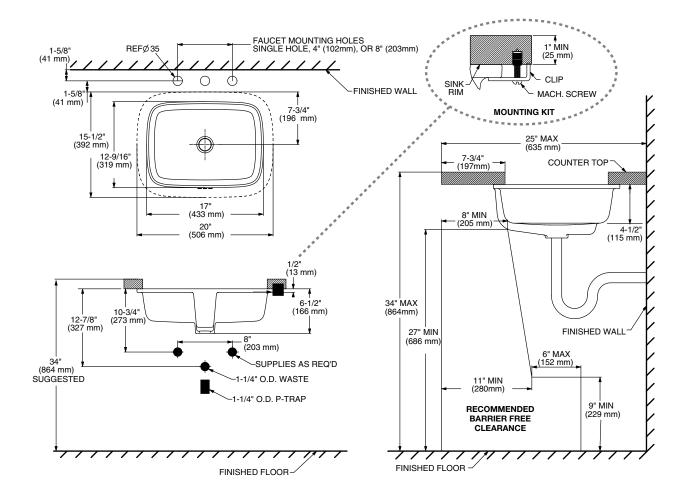

NOTES:

NOTES: INSTALL PRODUCT ACCORDING TO THE INSTALLATION INSTRUCTIONS. COUNTERTOP MANUFACTURER OR CUTTER MUST USE CUTOUT TEMPLATE PROVIDED WITH PRODUCT OR A CURRENT ONE PROVIDED BY AMERICAN STANDARD. AMERICAN STANDARD IS NOT RESPONSIBLE FOR CUTOUT ERRORS WHEN THE INCORRECT TEMPLATE IS USED. * DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P" TRAP ARE SUGGESTED. VUNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK. FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.