


Item: BA-LMDFX006AL ANZZI LED MIRROR INSTALL & OPERATION MANUAL V1.0

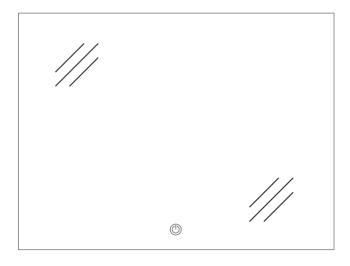

DON'T WAIT! REGISTER NOW!

Register your product within 90 days to ensure your product is recognized as an official purchase and is eligible for warranty coverage.

Mail in the completed registry card (Pg. 2) or register online at <u>www.swcorp.com/register</u>.



PRODUCT REGISTRATION*


Mail the part to 5701 NW 25 Avenue Miemi EL 221/2

IMPORTANT: YOUR WARRANTY WILL NOT BE RECOGNIZED UNLESS THIS CARD IS FULLY COMPLETED AND RETURNED OR ONLINE REGISTRATION IS COMPLETED.

To ensure that your warranty is registered and confirmed please do one of the following:

- 1. Register online at <u>www.swcorp.com/register</u>. You will be asked to fill out the same information you would in the registration card. Registering online is fast, secure and ensures we receive your information.
- 2. Complete, cut-out and mail the registration card below. By returning this registration card we confirm the date of purchase for your new product. This confirmation will allow us to process any warranty claims.

Product Registration Card NameAddress CityStateZip Phone Email	
CityStateZip	
Phone Email	
Date of Purchase	
Installer's NamePhone	
have read the Owner's Manual carefully and understand and agree done strictly in accordance with instructions and guidelines containe	
Signature	Date

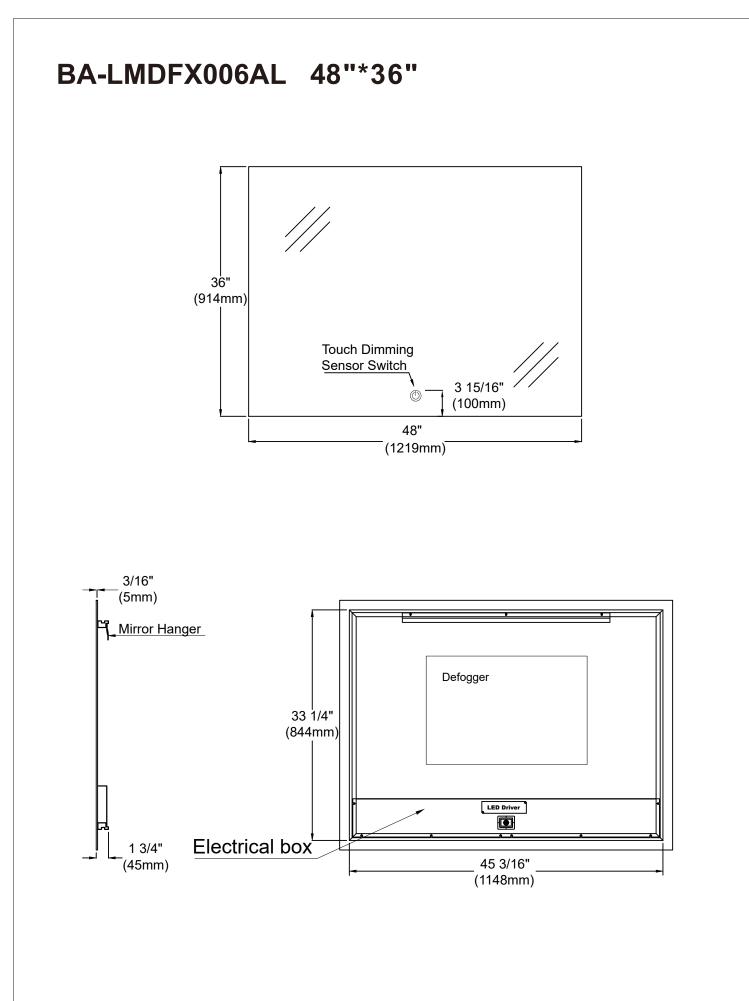

INSTALLATION INSTRUCTIONS

Apply to the below style of LED Backlit Mirror



Please read carefully and save these instructions.

Don't discard any of the packaging until you are sure that you have all of the parts and the fittings. **Make sure power to the junction box is off before commencing installation.**

IMPORTANT

- Unpack mirror. DO NOT lay mirror on tiled or concrete surface prior to installation. Mirror must be on protected surface to prevent chipping of the corners.
- Care must be taken before drilling pilot holes to avoid any existing wiring or pipe work that may be concealed.
- A certified electrician must perform all work. The mirror must be connected to a GFI.
- > The anti-fog mat operates only when the LED light is turn on by the touch sensor.

INSTALLATION

Please refer the installation diagram on the back of the page.

1) Unpack the LED mirror and prepare tools needed.(See Pic.1)

2) Make sure the measurement on the carboard screw holes are matching up with aluminum base on the mirror back, then mark the screw holes according from the carboard with pencil.(See Pic.2)

- 3) Drill holes, and put in the plastic plugs, then fix the aluminum bar by screws and twisting the T shape nail to the wall.(See Pic.3&Pic.4);
- 4) Connect hardwire to power line.(Make sure the power off) (See Pic.5)
- 5) Hanging the LED mirror with aluminum bar and lock it with the anti-pull iron sheet by using the spanner provided at the fittings bag.(See Pic.5&Pic.6)

FUNCTION DESCRIPTION

Touch sensor switch: Turn the light and anti-fog function by the dimmable sensor switch, see details as below:

Button:

a) Touch the button for LED light and anti-fog control;

b) Long press button for dimming. It will change the LED brightness from 10%-100%.

MAINTENANCE

Wipe clean with a soft damp cloth. Apply glass cleaner to cloth and do not apply directly to mirror.

Never use abrasive cleaners as these could damage the finish or exposed LED strips.

