



Parts Included:


Mounting Bracket



Wire Connector



Outlet Box Screw




Mounting Screw



CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

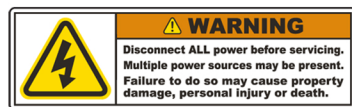

- Consult a qualified electrician if you have any electrical questions or need to replace the driver.

Care Instructions

Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

Arnsberg

customerservice@arnsberg.com


www.arnsberg.com

ASSEMBLY INSTRUCTIONS

DOVER


304900142

Mounting Instructions

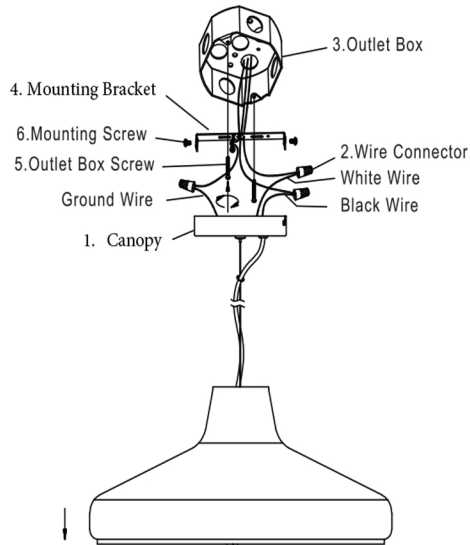

Supply wire connection guide:
Make wire connections, securing with wire connectors (AA), following the reference chart listed below.

CONNECT HOT, BLACK OR RED OUTLET SUPPLY WIRE TO:	CONNECT NEUTRAL, WHITE OUTLET SUPPLY WIRE TO:
Black or Marked "L"	White or Marked "N"
Parallel Cord (round and smooth)	Parallel Cord (square and ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with Copper Metal Conductor	Insulated Wire (not green) with Silver Metal Conductor

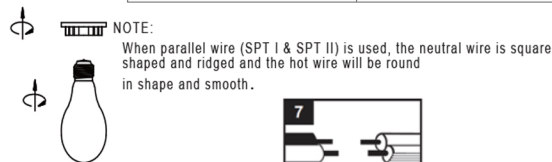

Assembly Instructions

1. Screw the mounting screws (#6) into the mounting bracket (#4). Mount the mounting bracket (4) to the outlet box (#3) Make sure the heads of the mounting screws (#6) are facing outside when the mounting bracket (#4) is attached to the outlet box (#3).
2. Connect the ground wire from the fixture to the ground wire from the outlet box (#3). Connect the white wire from the fixture to the white wire (neutral wire) from the outlet box (#3). Connect the black wire from the fixture to the black wire (live wire) of the Outlet Box (#3). Cover the connections using the Wire Connectors (#2). Wrap the wire connectors with electrical tape for a more secure connection. Position the wires back inside the Outlet Box (#3). Note: If you have electrical questions, consult your local licensed electrician.
3. Place the canopy (#1) over the Outlet Box (#3), allow the heads of the outlet box screws (#5) to come out through the large end of the keyholes of the canopy (#1). Twist the canopy (#1) until the heads of the Outlet Box screws (#5) slide into the narrow ends of the keyholes. Screw the Outlet Box Screws (#5) to secure the canopy (#1).
4. Before completing installation, please place the lampshade on the corresponding rotary button position of the chassis, and lock the lampshade according to the arrow direction.
5. Installation is complete, turn on the power at the circuit breaker of the fuse box. Turn the light switch on to activate the fixture.