

Parts Included:

Mounting Screw(#8-32)



Wire Connector



Allen Wrench



Mounting Screw(#6-32)



Universal Crossbar



Cap Nut




Mounting Screw(M4x18)



CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



- Consult a qualified electrician if you have any electrical questions or need to replace the driver.

Care Instructions


Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

Arnsberg

customerservice@arnsberg.com

www.arnsberg.com

Mounting Instructions

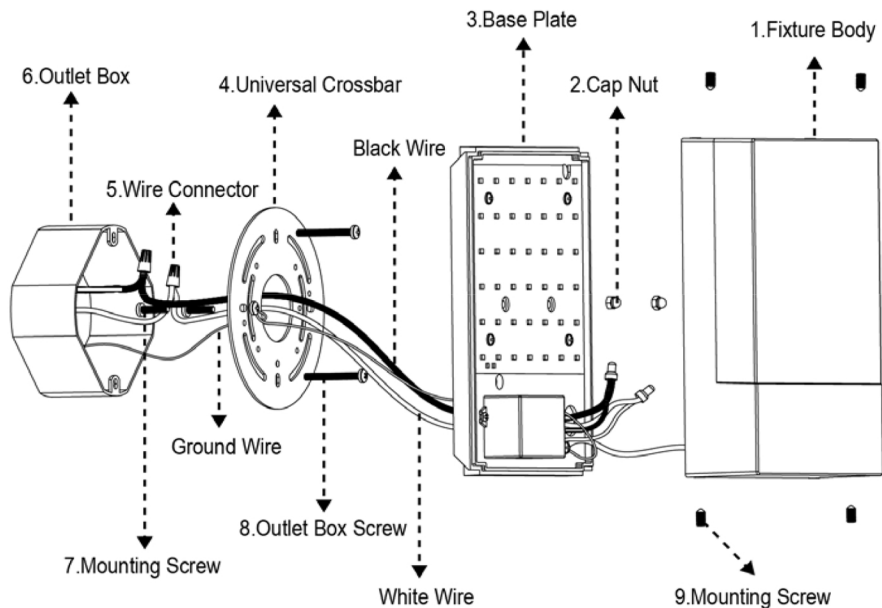

ASSEMBLY INSTRUCTIONS PECOS 227760101

Assembly Instructions

1. Open the Base Plate (#3). Screw the two mounting screws (#7) into the universal crossbar (#4). Mount the universal crossbar (#4) to the outlet box (#6) using the two outlet box Screws (#8). Make sure the threaded ends of the mounting screws (#7) are facing outside when the universal crossbar (#4) is attached to the Outlet Box (#6).
2. Connect the ground wire from the fixture and outlet box (#6) to the ground screw on the universal crossbar (#4). Connect the white wire (neutral wire) from the fixture to the white wire (neutral wire) from the outlet box (#6). Connect the black wire from the fixture to the black wire (live wire) from the outlet box (#6). Cover the connections using the wire connectors (#5). Wrap the wire connections with electrical tape for a more secure connection. Position the wires back inside the outlet Box (#6). Note: If you have electrical questions, consult your local licensed electrician.
3. Mount the base plate (#3) to the universal crossbar (#4). Allow the threaded ends of the mounting screws (#7) to come out through the mounting holes of base plate (#3). Screw the two mounting screws (#7) using the two cap nuts (#2).
4. Screw the fixture body (#1) to the base plate (#3) using the four mounting screws (#9).
5. Installation is now complete. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.