


Parts Included:

Wire Connector




Allen wrench



Outlet Box Screw(#8-32)




Outlet Box Screw(#6-32)

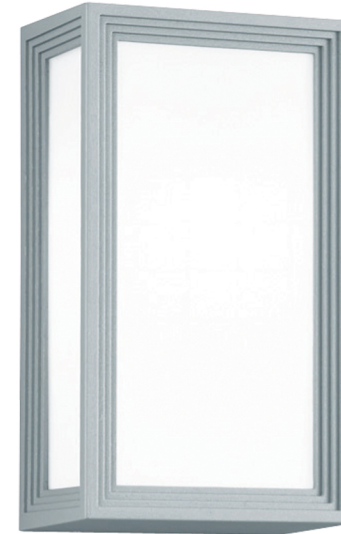

CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.
- Consult a qualified electrician if you have any electrical questions or need to replace the driver.

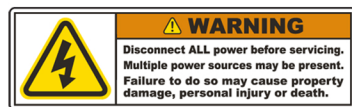

Care Instructions

Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

Arnsberg

customerservice@arnsberg.com


www.arnsberg.com

ASSEMBLY INSTRUCTIONS

TIMOK

228060187

Mounting Instructions

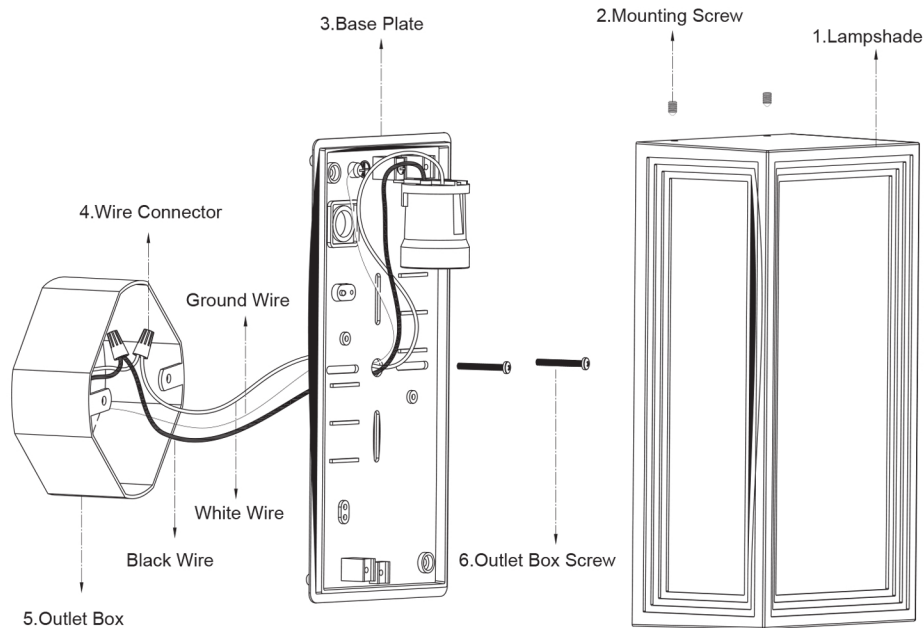

Assembly Instructions

1. open the Base Plate (#3). Screw the two Mounting Screws (#5) into the Universal Crossbar (#4). Mount the Universal Crossbar (#4) to the Outlet Box (#6) using the two Outlet Box Screws (#8). Make sure the threaded ends of the Mounting Screws (#5) are facing outside when the Universal Crossbar (#4) is attached to the Outlet Box (#6).
2. Connect the ground wire from the fixture and Outlet Box (#6) to the ground screw on the Universal Crossbar (#4). Connect the white wire from the fixture to the white wire (neutral wire) from the Outlet Box (#6). Connect the black wire from the fixture to the black wire (live wire) from the Outlet Box (#6). Cover the connections using the Wire Connectors (#5). Wrap the wire connections with electrical tape for a more secure connection. Position the wires back inside the Outlet Box (#6). Note: If you have electrical questions, consult your local electrical code for approved grounding methods.
3. Mount the Base Plate (#3) to the Universal Crossbar (#4). Allow the threaded ends of the Mounting Screws (#5) to come out through the mounting holes of Base Plate (#3). Screw the two Mounting Screws (#5) using the two Cap Nuts (#2).
4. Fixture Body (#1) to the Base Plate (#3) using the four Mounting Screws (#9).
5. installation is complete. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.