


### Parts Included:

Mounting Bracket



Wire Connector



Mounting Screw




Outlet Box Screw



### CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

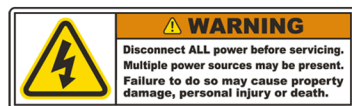


- Consult a qualified electrician if you have any electrical questions or need to replace the driver.

### Care Instructions

Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

### Mounting Instructions

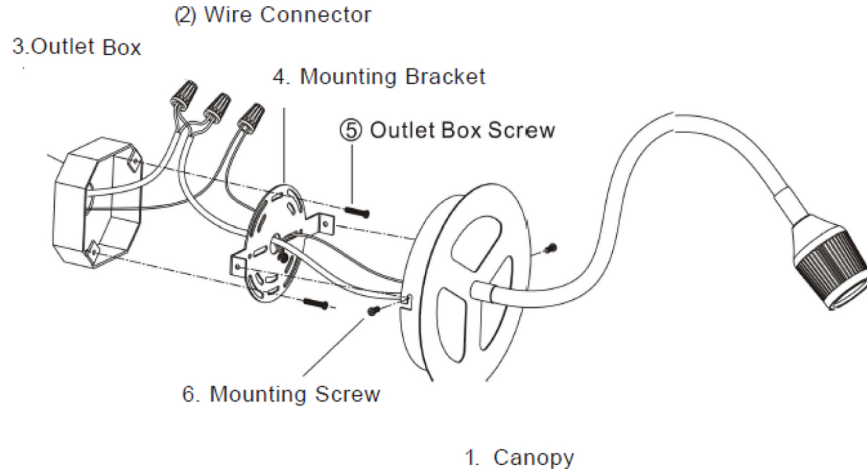

### Assembly Instructions

1. Turn off the electrical power to the outlet at the circuit breaker in the electrical panel.
2. Using the outlet box screws (#5), attach the mounting bracket (#4) to the outlet box (#3).
3. Connect the ground wire from the fixture to the ground wire from the outlet box (#3). Connect the white wire from the fixture to the white wire (neutral wire) from the outlet box (#3). Connect the black wire from the fixture to the black wire (Live wire) of the outlet box (#3). Cover the connections using the wire connectors (#2). Wrap the wire connectors with electrical tape for a more secure connection. Position the wires back inside the outlet box (#3). Note: if you have electrical questions, consult your local licensed electrician.
4. Place the canopy (#1) over the mounting bracket (#4). Adjust the canopy (#1) until the holes align with the mounting bracket. Tighten the mounting screws (#5) to secure the canopy (#1).
5. Installation is complete. Turn on the power at the circuit breaker in the fuse box. Turn the light switch on to activate the fixture.