
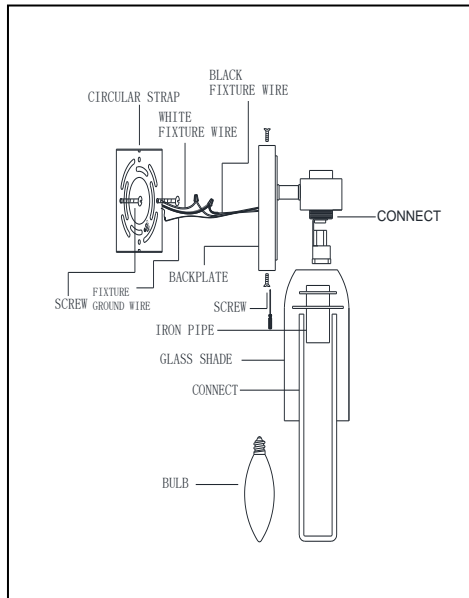


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

AC11691NB/AC11693NB/AC11694NB

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

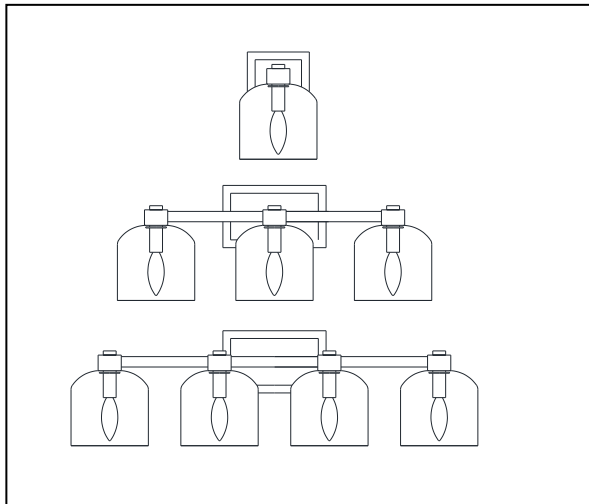

## Installation Steps

### PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove old fixture and all mounting hardware from wall outlet box.
2. Carefully unpack your new fixture and lay out all the parts on a clear surface. Take care to not lose any small parts necessary for installation.

### MOUNTING THE FIXTURE

1. The circular strap contains several pairs of threaded holes. Find the pair of holes that match the hole spacing in your fixture canopy and thread the two studs part way into the circular strap. Adjust the length as you measured and then tighten with the small nut.
2. Place the circular strap over the outlet box so the studs are vertical or horizontal, as required by fixture type. Holding the strap in place, screw to the outlet box by threading the two outlet box screws through the slotted holes.
3. Connect the wires as described under "Connecting the Wires" heading.
4. Place the fixture back plate over the two studs so they protrude through the holes in the back plate. Thread the screws into the back plate and continue turning until the fixture is snug against the wall. See "Completing the Installation".

### CONNECTING THE WIRES

Connect the fixture wires to the supply wires. Make sure all wire connectors are secure and do not easily pull off with a slight tug. If there is no green ground wire from the outlet box, connect the fixture ground wire to the circular strap with the green screw provided.

### COMPLETING THE INSTALLATION

1. Carefully slide the glass shades over the sockets. The candle sleeves have retaining rings attached. Each retaining ring has two small holes on each side. The glass shade opening is tight. Carefully push the candle sleeves down into the glass shades and over the sockets. Carefully place the tips of socket tool into the holes in the retaining ring. Use the socket tool to thread the retaining rings onto the socket threads. This will secure the glass in place
2. Install the light bulb in accordance with the fixture's specifications.

### DO NOT EXCEED THE MAXIMUM WATTAGE RATING!

3. Turn on the power at fuse or circuit box.

**NOTE:** All parts must be used as indicated, and the physical integrity must be maintained to insure ETL/CETL listing of this fixture.