

ASSEMBLY INSTRUCTIONS

ITEM #49132|WALL SCNCE

ITEM DESCRIPTION

MATERIAL TYPE: STEEL FINISH : NATIQUE BRASS TOP COAT/SEALANT:
 SOCKET TYPE: E12 SOCKET QTY:1
 BULB TYPE: TYPE T BULB WATTAGE: 60W VOLTAGE:110V-120V
 ITEM NET WEIGHT:
 UL COMPLIANT
 INSTALLATION ENVIRONMENT:SUITABLE FOR DAMP LOCATIONS



NOTE:

*YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON
 *THIS ITEM MAY REQUIRE PERIODIC TIGHTENING


PARTS

A	MOUNTING PLATE	1 PC
B	SET SCREWS	2 PC
C	LAMP BODY	1 PC
D	SOCKET	1 PC
E	BULB	1 PC
F	GLASS SHADE	1 PC



PRODUCT ASSEMBLY

INCLUDED ASSEMBLY HARDWARE

J mounting screws



K Plastic wire connectors

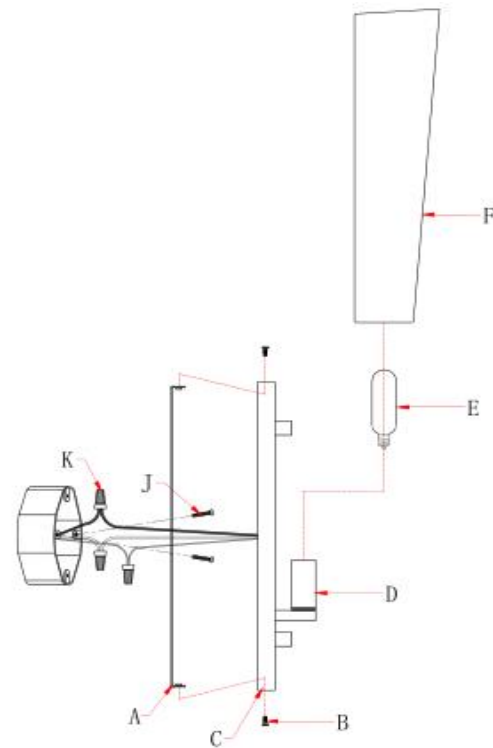

ASSEMBLY INSTRUCTIONS

- 1.REMOVE ALL PACKING CONTENTS AND PARTS FROM THE CARTON(S)CAREFULLY.
- 2.PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEING ASSEMBLY.
- 3.SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
- 4.SEPARARE THE MOUNTING PLATE(A) FROM THE LAMP BODY(C) BY REMOVING THE 2 SET SCREWS(B)
- 5.INSERT THE J-BOX WIRES THROUGH THE CENRER OPENING OF MOUNTING PLATE
- 6.ATTACH THE MOUNTING PLARE ONTO THE WALL J-BOX
- 7.SECURE THE MOUNTING PLATE BY TURNING THE 2 MOUNTING SCREWS (J)
8. CONNECT THE GROUND FIXTURE WIRE TO THE GROUND J-BOX WIRE USING THE PLASTIC WIRE NUT CONNECTOR (K) AND WRAP THE CONNECTING WITH ELECTRICAL TAPE. BE SURE THAT NO WIRE STRANDS ARE EXPOSED.
9. IF THE JUCTION BOX DOES NOT HAS A GROUND WIRE, WRAP THE FIXTURE'S BARE GROUND WIRE AROUND THE GREEN GROUND SCREW AND INSERT THE SCREW INTO THE MOUNTING PLATE (A), MARKED AS "GND", AND TIGHTEN SCREW TO SESURE THE WIRE.
- 10.CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL J-BOX WIRE FIRST AND THEN CONNECT THE HOT FIXTURE WIRE TO THE HOT J-BOX WIRE USING THE PLASTIC WIRE NUT CONNECTOR(K). WRAP THESE CONNECTORS WITH ELECTRICAL TAPE. BE SURE THAT NO WIRE STRANDS ARE EXPOSED.
- 11.CHECKING THE WIRING CONNECTIONS AND IF ALL LOOKS GOOD, GENTLY TUCK THE WIRE CONNECTIONS NEATLY INTO THE WALL JUNCTION BOX.
- 12.POSITION THE BACK PLATE OVER THE MOUNTING PLATE(A) ,SECURE THE BACK PLATE BY TIGHTENING 2 SET SCREWS (B)
- 13.INSERT THE SPECIFIED LIGHT BULBS TYPE B 60W (E) INTO THE SOCKET (D).**DO NOT EXCEED SPECIFIED WATTAGE.**
- 14.ATTACH THE GLASS SHADE (F) ONTO THE LAMP BODY (C)
- 15.RESTORE POWER TO THE JUNCTION BOX AND TEST FIXTURE.

CARE & MAINTENANCE

DUST WITH A DRY CLOTH.

FOR CUSTOMER SERVICE QUESTIONS CALL 1.800.338.2150

ARTERIOS HOME:972.488.9800

ARTERIOS CONTRACT:972.488.9800 EXT.321

DISCLAIMERS

WE RECOMMEND THE INSTALLATION OF THIS ELECTICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.

ARTERIOS