

# ASSEMBLY INSTRUCTIONS

ITEM NUMBER#45061

## ITEM DESCRIPTION: Swami Large Pendant

MATERIAL TYPE: STEEL FINISH:ANTIQUE BRASS TOP COAT/SEALANT:  
 SOCKET TYPE: E27 CERAMIC SOCKET QTY:1  
 BULB TYPE: TYPE A BULB WATTAGE: 150W/CFL 35W/LED 28W  
 ITEM NET WEIGHT: VOLTAGE:110V-120V

UL COMPLAINT  
 INSTALLATION ENVIRONMENT:SUITABLE FOR DAMP LOCATIONS






NOTE:  
 \*YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON  
 \*THIS ITEM MAY REQUIRE PERIODIC TIGHTENING


### PARTS

<b>A</b>	MOUNTING PLATE	1 PC
<b>B</b>	CANOPY	1 PC
<b>C</b>	COLLAR LOOP	1 PC
<b>D</b>	RODS	4 PCS
<b>E</b>	LOCKING RING	1 PC
<b>F</b>	SHADE	1 PC (NOT INCLUDED)
<b>G</b>	SOCKET ASSEMBLY	1 PC

### INCLUDED ASSEMBLY HARDWARE

<b>H</b> Plastic wire connectors 	<b>I</b> mounting screws 	<b>J</b> allen wrench 
---	---	---

### PRODUCT ASSEMBLY

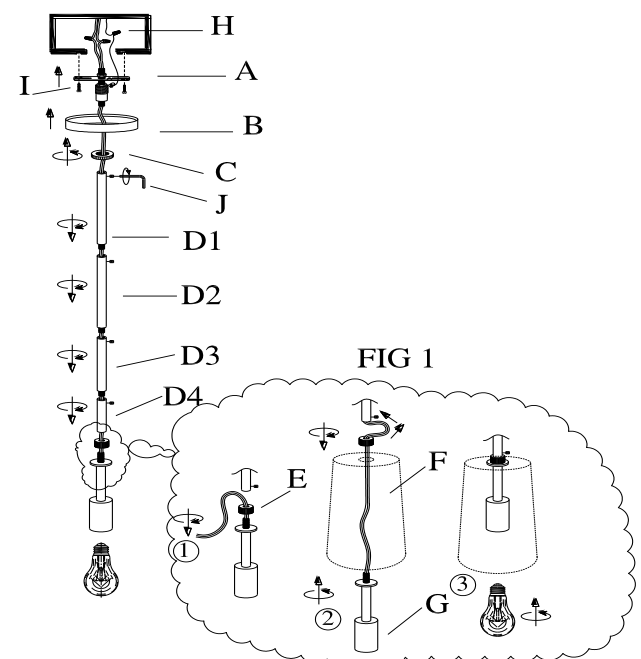

## ASSEMBLY INSTRUCTIONS

- 1.REMOVE ALL PACKING CONTENTS FROM THE CARTON(S)CAREFULLY
- 2.REMOVE ALL PARTS FROM THE PACKAGE(S) CAREFULLY
- 3.SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER
- 4.AS SHOWN IN FIG,UNSCREW THE LOCKING RING(E) OFF THE SOCKET ASSEMBLY(G),AND ATTACH THE SHADE(F,NOT INCLUDED)FROM THE BOTTOM TO THE SOCKET PROPERLY,THEN SECURE IT BY SCREW THE LOCKING RING(E)TILL TIGHT.
- 5.SCREW THE ROD(D4) ONTO THE TOP OF SOCKET ASSEMBLY(G),AND TIGHTEN THE HEXANGULAR SCREW IN THE SIDE HOLE WITH ALLEN WRENCH(J) .REPEAT THE SAME OPERATION ON THE ROD (D1),(D2)AND (D3).
- 6.REMOVE THE MOUNTING PLATE(A)FROM THE CANOPY(B)BY TURNING COLLAR LOOP(C ) IN A COUNTER CLOCKWISE DIRECTION.
- 7.CAREFULLY INSPECT THE PENDANT'S FIXTURE WIRES. THE NEUTRAL FIXTURE WIRE HAS VERY FINE RIDEGS MOLDED INTO ITS PLASTIC COVERING. THE HOT FIXTURE WIRE HAS A SMOOTH COVERING.THE BARE SILVER WIRE IS THE GROUNDED WIRE.
8. ATTACH THE GROUND WIRE FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE FROM THE OUTLET (USUALLY GREEN) OR BARE WIRE). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (H) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE MOUNTING PLATE (A) FACING DOWN, AND WRAP THE FIXTURE'S BARE GROUND WIRE AROUND THE GROUND SCREW. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE). FASTEN EACH TOGETHER WITH A WIRE CONNECTOR (H) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO STRANDS ARE EXPOSED.
- 10.CONNECT THE HOT FIXTURE WIRE TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (H) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO WIRE STRANDS ARE EXPOSED. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
11. GENTLY TUCK THE WIRE CONNECTIONS NEATLY INTO THE CEILING JUNCTION BOX.
- 12.ATTACH THE MOUNTING PLATE (A) WITH NIPPLE TO THE CEILING OUTLET BOX USING THE ENCLOSED MOUNTING SCREWS (I) AND TIGHTEN SCREWS WITH A SCREWDRIVER.
13. PUSH COLLAR LOOP IN CANOPY (B) AND THREAD ONTO NIPPLE IN MOUNTING PLATE (A) BY TURNING IN A CLOCKWISE
- 14.SCREW ROD (D1) TO CANOPY (B), USING HEXANGULAR SCREW AND ALLEN WRENCH(J)  
BE SURE ALL THE HEXANGULAR SCREWS ARE TIGHT ENOUGH.
15. INSERT 1 TYPE A 150W BULBS(OR CFL/35W,OR LED 28W BULB, NOT INCLUDED) INTO THE SOCKETS.**DO NOT EXCEED SPECIFIED WATTAGE.**

## CARE & MAINTENANCE

FOR CUSTOMER SERVICE QUESTION CALL 1-800-338-2150

### DISCLAIMERS

ARTERIOS HOME:972.488.9800

WE RECOMMEND THE INSTALLATION OF THIS ELECTRICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.

ARTERIOS CONTRACT:972.488.9800 EXT.321

# ARTERIOS