

ASSEMBLY INSTRUCTIONS

ITEM #49815| Ozona Sconce---ETL

ITEM DESCRIPTION

MATERIAL TYPE: STEEL.MARBLE FINISH :ANTIQUE BRASS.BLK MARBLE MATTE
SOCKET TYPE: INTEGRATED LED STRIP TOP COAT/SEALANT:
BULB TYPE: LED BULB WATTAGE: 16W DIMMABLE
ITEM NET WEIGHT: VOLTAGE:110V-120V

UL COMPLIANT

INSTALLATION ENVIRONMENT:SUITABLE FOR DAMP LOCATIONS



NOTE:

*YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON
*THIS ITEM MAY REQUIRE PERIODIC TIGHTENING

PARTS

A	MOUNTING PLATE	1 PC
B	BACK PLATE	1 PC
C	PLATE SCREW	4 PCS
D	YELLOW-GREEN CORD	1 PC


INCLUDED ASSEMBLY HARDWARE

E Plastic wire connectors 	F mounting screws 	G anchor 	H strengthened screw
--------------------------------------	------------------------------	---------------------	---------------------------------

TOOLS NEEDED(NOT INCLUDED)

I SCREWDRIVER

PRODUCT ASSEMBLY

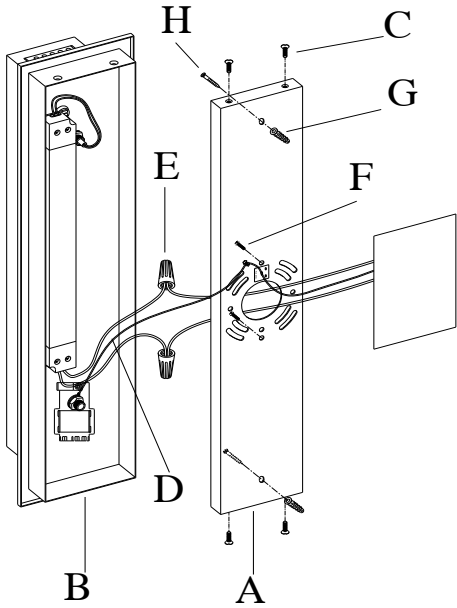

ASSEMBLY INSTRUCTIONS

- 1.REMOVE ALL PACKING CONTENTS AND PARTS FROM THE CARTON(S)CAREFULLY
- 2.PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEGIN ASSEMBLY
- 3.TURN OFF POWER TO THE JUNCTION BOX WHERE THE LAMP WILL BE INSTALLED
4. REMOVE THE MOUNTING PLATE (A) FROM THE BACK PLATE (B) BY LOOSE PLATE SCREWS(C).
- 5.PULL THE ELECTRICAL CORD OF "J BOX"THROUGH THE EXIT HOLE OF THE MOUNTING PLATE(A)
- 6.ATTACH THE YELLOW-GREEN GROUND WIRE(D) FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE FROM THE OUTLET (USUALLY GREEN OR BARE WIRE). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (E) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE MOUNTING PLATE (A) FACING DOWN, AND WRAP THE FIXTURE'S GROUND WIRE AROUND THE GROUND SCREW.
IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- 7.CONNECT THE NEUTRAL FIXTURE (BULE ,ABELLED "N"), TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE). FASTEN EACH TOGETHER WITH A WIRE CONNECTOR (E) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO STRANDS ARE EXPOSED.
- 8.CONNECT THE HOT FIXTURE WIRE(BROWN,LABELLED "L"). TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (E) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO WIRE STRANDS ARE EXPOSED. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
9. GENTLY TUCK THE WIRE CONNECTIONS NEATLY INTO THE JUNCTION BOX.
- 10.DRILL THE ANCHOR(G) TO THE WALL FIRST, ATTACH THE MOUNTING PLATE (A) TO THE OUTLET BOX USING THE MOUNTING SCREWS(F). TIGHTEN WITH A SCREWDRIVER(I).THEN THREAD STRENGTHENED SCREWS(H)INTO THE ANCHORS.
REPEAT THE SAME OPERATION ON ANOTHER ANCHOR AND STRENGTHENED SCREW.
- 11.ATTACH THE BACK PLATE(B) TO THE MOUNTING PLATE(A) USING THE ENCLOSED PLATE SCREWS(C) WITH SCREWDRIVER(I)

CAUTION:

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person

CARE & MAINTENANCE

FOR CUSTOMER SERVICE QUESTION CALL 1-800-338-2150

ARTERIORS HOME:972.488.9800

ARTERIORS CONTRACT:972.488.9800 EXT.321

DISCLAIMERS

WE RECOMMEND THE INSTALLATION OF THIS ELECTRICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.

ARTERIORS