

ASSEMBLY INSTRUCTIONS

ITEM # DMC06 /TRINA CHANDELIER

ITEM DESCRIPTION


MATERIAL TYPE:METAL+GLASS FINISH :ANTIQU BRASS + CLEAR SEEDY SLUMP GLASS TOP COAT/SEALANT
 SOCKET TYPE:E12 CERAMIC SOCKET QTY:10PCS
 BULB TYPE:TYPE G BULB WATTAGE: 60W or/CFL 12W or/LED 10W VOLTAGE:110V-120V
 ITEM NET WEIGHT:
 UL COMPLIANT
 INSTALLATION ENVIRONMENT:SUITABLE FOR DAMP LOCATIONS




NOTE:
 *YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON
 *THIS ITEM MAY REQUIRE PERIODIC TIGHTENING
 *MIN 75°C SUPPLY CONDUCTORS

PARTS

A	MOUNTING PLATE	1PC
B	CANOPY	1PC
C	COLLAR LOOP	1PC
D	LAMP BODY	1PC
E	SCREW NUT	40PCS
F	GLASS	20PCS
G1/G2/G3/G4	ROD	4PCS
H	THUMB-SCREW	40PCS
I	BULB(NOT INCLUDED)	10PCS
M	SOCKET	10PCS
N	POWER WIRE	1PC
L	HEX SCREW	8PCS
R	BRACKET	1 PC
S	SCREW	2 PCS
W	AIRCRAFT WIRE	1 PC
Z	COUPLING	1 PC

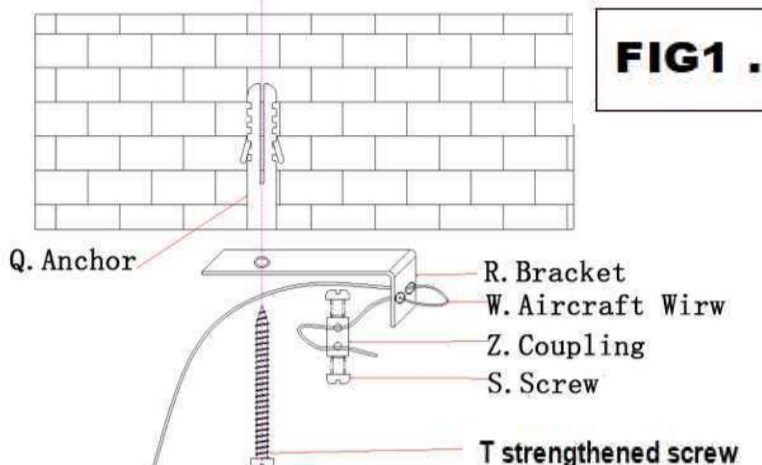



PRODUCT ASSEMBLY

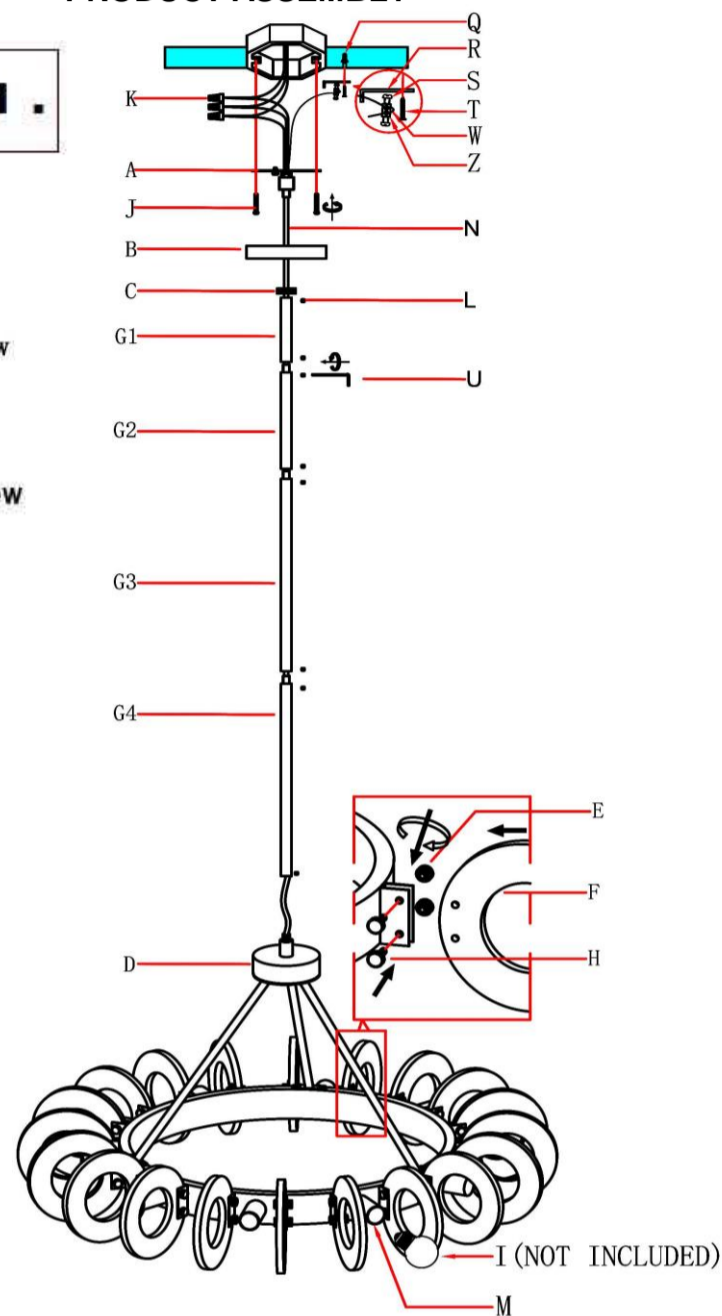

INCLUDED ASSEMBLY HARDWARE

J MOUNTING SCREWS

K PLASTIC WIRE CONNECTORS





TOOLS NEEDED(INCLUDED)

U ALLEN WRENCH

Q ANCHOR

T STRENGTHENED SCREW



ASSEMBLY INSTRUCTIONS

- 1.REMOVE ALL PACKING CONTENTS AND PARTS FROM THE CARTON(S)CAREFULLY.
- 2.PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEGIN ASSEMBLY.
3. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
- 4.PASS THE POWER WIRE(N) THROUGH THE ROD (G4),(G3),(G2)&(G1),SCREW THE ROD(G4) TO LAMP BODY(D) TILL TIGHT,REPEAT THE SAME OPERATION ON THE ROD(G3),(G2) AND ROD(G1).WHEN YOU CONNECT THE RODS,LOOSEN THE SMALL HEX SCREWS(L) IN THE SIDE HOLE FIRST THEN TIGHTEN WITH ALLEN WRENCH(U) AFTER ALL RODS ARE CONNECTED. **BE SURE ALL THE HEXANGULAR SCREWS ARE TIGHT ENOUGH.**
- 5.PUT THE COLLAR LOOP(C) AND CANOPY(B) INTO THE ROD (G1) IN TURN, THEN PASS THE POWER WIRE(N) THROUGH THE MOUNTING PLATE(A). SCREW THE ROD(G1) TO THE NIPPLE OF MOUNTING PLATE(A) TILL TIGHT.
- 6.PULL THE ELECTRICAL CORD OF "J BOX"THROUGH THE EXIT HOLE OF THE MOUNTING PLATE(A)
- 7.DRILL ONE HOLE ON THE CEILING AND INSERT ANCHOR(Q) INTO DRILLED HOLE, THEN FIX BRACKET(R) TO THE CEILING WITH STRENGTHENED SCREW (T) BY SCREWING INTO ANCHOR(Q). REMOVE THE COUPLING(Z) FROM THE AIRCRAFT WIRE(W) BY LOOSENING (2) SCREWS(S). PASS THE AIRCRAFT WIRE(W) THROUGH (2) HOLES ON THE BRACKET(R). THEN PASS THE AIRCRAFT WIRE(W) THROUGH (2) HOLES ON THE COUPLING(Z) AND FIX WITH (2) SCREWS(S) AS FIG1 . OR YOU CAN FIND MORE DETAILS ON NEXT PAGE. **BE SURE TO TIGHTEN TWO SCREWS ATTACHED ON THE COUPLING(Z).**
- 8.CAREFULLY INSPECT THE FIXTURE WIRES. THE NEUTRAL FIXTURE WIRE HAS VERY FINE RIDEGS MOLDED INTO ITS PLASTIC COVERING. THE HOT FIXTURE WIRE HAS A SMOOTH COVERING.THE BARE WIRE IS THE GROUNDED WIRE.
- 9.ATTACH THE GROUND WIRE FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE FROM THE OUTLET (USUALLY GREEN OR BARE WIRE). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE MOUNTING PLATE (A) FACING DOWN, AND WRAP THE FIXTURE'S BARE GROUND WIRE AROUND THE GROUND SCREW. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
- 10.CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE). FASTEN EACH TOGETHER WITH A WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO STRANDS ARE EXPOSED.
- 11.CONNECT THE HOT FIXTURE WIRE TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK). FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. BE SURE NO WIRE STRANDS ARE EXPOSED. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 12.GENTLY TUCK THE WIRE CONNECTIONS(K) NEATLY INTO THE JUNCTION BOX.
- 13.ATTACH THE MOUNTING PLATE (A) WITH NIPPLE TO THE CEILING OUTLET BOX USING THE ENCLOSED MOUNTING SCREWS (J)
- 14.PUSH COLLAR LOOP (C) IN CANOPY (B) AND THREAD ONTO THE NIPPLE IN MOUNTING PLATE (A) BY TURNING IN A CLOCKWISE DIRECTION.
- 15.ATTACH THE GLASS (F) ON THE LAMP BODY(D), THEN FIX GLASS WITH THUMB-SCREW(H) AND SCREW NUT (E).REPEAT THE SAME OPERATION ON THE OTHER GLASSES(F).
- 16.INSERT 10 TYPE B 60W BULBS (OR /CFL 12W OR /LED 10W, NOT INCLUDED) INTO THE SOCKET (M). **DO NOT EXCEED THE SPECIFIED WATTAGE.**
- 17.RESTORE POWER TO THE JUNCTION BOX AND TEST FIXTURE.

CARE & MAINTENANCE

DUST WITH A DRY CLOTH.

DISCLAIMERS

FOR CUSTOMER SERVICE QUESTIONS CALL 1.888.488.8866 WE RECOMMEND THE INSTALLATION OF THIS ELECTICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.
 ARTERIORS HOME:972.488.9800
 ARTERIORS CONTRACT:972.488.9800 EXT.321

ARTERIORS