

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:


ITEM NO.:GADFC02 NAME:GLAZE LARGE FLUSH MOUNT

MATERIAL TYPE: METAL FINISH:ANTIQUE BRASS

SOCKET TYPE: E26 SOCKET QTY:3PCS

BULB WATTAGE: 40W TYPE A

VOLTAGE: 120V ITEM NET WEIGHT: 15.4LBS

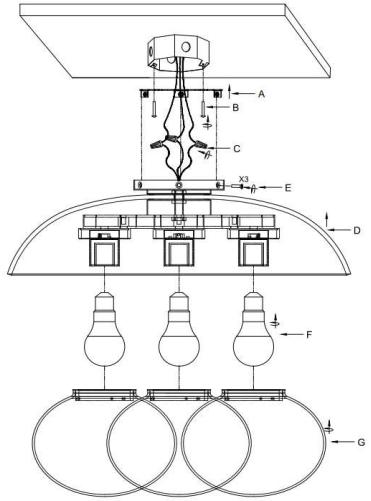

PARTS INCLUDED:

Mounting plate(A) Qty: 1

Mounting screw(B) Qty: 3

Wire cap(C) Qty: 3

Fixture(D) Qty: 1

Canopy screw(E) Qty: 3pcs

Bulb(F) Qty: Not included

Glass shade(G) Qty: 3

HARDWARE INCLUDED:

Mounting Screws Qty: 3

Plastic Wire Cap Qty: 3

TOOLS NEEDED (Not Included):

1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.


For customer service questions call 1-800-338-2150



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Attach the mounting plate (A) to the ceiling junction box using the enclosed mounting screws (B) and tighten screws with screwdriver.
3. Connect ground wire from ceiling to ground wire from lamp using wire caps(C).
4. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(C).
5. Attach fixture (D) to the mounting plate (A) and secure with 3 canopy screws (E). Tighten using a screwdriver.
6. Install 3 light bulbs (F) into socket (each max. 40W A or 10W CFL or 9W LED - bulbs are not included).
7. Attach each of the 3 glass shades (G) onto the fixture (D) in a clockwise direction until they are tight.
8. Restore power to junction box and test fixture.

C wire cap 3x **E** canopy screw 2x **B** mounting screw 2x

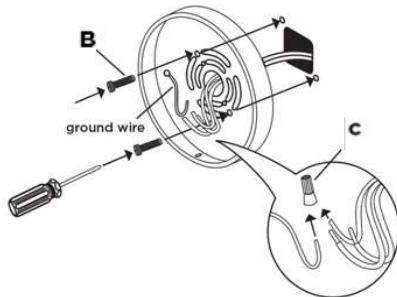

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIORS