

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: GADPC01 NAME: GLAZE PENDANT

MATERIAL TYPE: METAL FINISH: ANTIQUE BRASS

SOCKET TYPE: E26 SOCKET QTY: 1PC

BULB WATTAGE: 40W TYPE A

VOLTAGE: 120V ITEM NET WEIGHT: 8LBS

PARTS INCLUDED:

Mounting Plate(A) Qty: 1

Mounting screw(B) Qty: 3

Canopy screw(C) Qty: 3

Cable(D) Qty: 1

Ceramic shade(E) Qty: 1

Metal ring(F) Qty: 1

Bulb(G) Qty: Not included

Glass shade(H) Qty: 1

Wire cap(I) Qty: 3

HARDWARE INCLUDED:

Mounting Screws Qty: 3

Plastic Wire cap Qty: 3


Green Ground Screw Qty: 1

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

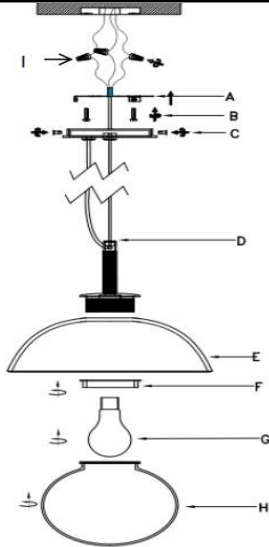

TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Gently pull wiring down from ceiling junction box and allow to hang.
3. Remove mounting plate(A) from the canopy by unscrewing the canopy screw(C).
4. Carefully inspect the pendant's fixture wires.
Neutral fixture wire: White
Hot fixture wire: Black
Ground wire: Green
5. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire cap(I) and wrap the connection with electrical tape.
6. Attach the neutral fixture wire from the pendant to the neutral junctionbox wire (usually white). Fasten each together with a wire cap(I) and wrap the connection with electrical tape.
7. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire cap(I) and wrap the connection with electrical tape.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
8. Gently tuck the wire cap(I) neatly into the ceiling junction box.
9. Place the mounting plate(A) over the center of the ceiling junction box.
10. Align holes in mounting plate(A) with holes in junction box and attach with two mounting screw(B). Secure screws with a Phillips head screwdriver.
11. Push canopy up over the mounting plate(A) until it is flush with the ceiling and secure canopy with 3 canopy screws(C).
12. Attach ceramic shade (E) to the fixture and secure with metal ring (F).
13. Install 1 light bulb (G) into socket (40W A or 10W CFL or 9W LED - bulbs are not included).
14. Attach the glass shade (H) to the fixture in a clockwise direction until it's tight.
15. Restore power to the junction box and test the fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS