

# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:

ITEM NO.: GADWC07

NAME: PUNCH OVERSIZED OUTDOOR  
SCONCE

MATERIAL TYPE: METAL, GLASS

FINISH: MARINE GRADE AGED GRAPHITE


SOCKET TYPE: E26

SOCKET QTY: 2

BULB WATTAGE: LED BULB 8W

VOLTAGE: 110V-120V

ITEM NET WEIGHT: 20.1 LBS

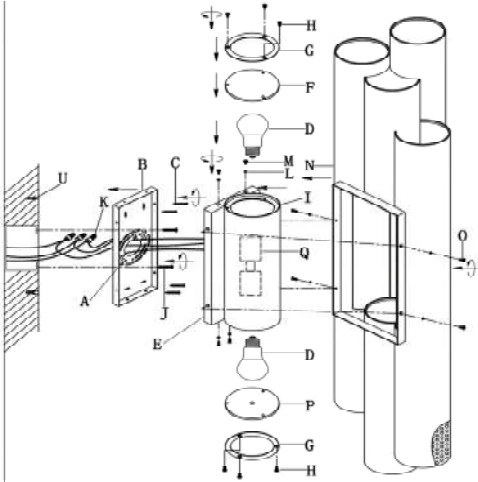

## PARTS INCLUDED:

Mounting Plate (A)	Qty: 1Pc	Rubber Washer (L)	Qty: 8Pcs
Back Plate (B)	Qty: 1Pc	Screw Nut (M)	Qty: 4Pcs
Back Plate (E)	Qty: 1Pc	Metal Frame (N)	Qty: 1Pc
Top Glass Sheet (F)	Qty: 1Pc	Screw Nut (O)	Qty: 4Pcs
Metal Ring (G)	Qty: 2Pcs	Bottom Glass Sheet (P)	Qty: 1Pc
Screw Nut (H)	Qty: 6Pcs	Socket (Q)	Qty: 2Pcs
Lamp Assembly (I)	Qty: 1Pc		

## HARDWARE INCLUDED:

Mounting Screws (J)	Qty: 2Pcs
Plastic Wire Cap (K)	Qty: 3Pcs
Plastic anchor (U)	Qty: 4Pcs
Strengthen screw (C)	Qty: 4Pcs

## TOOLS NEEDED (Not Included):

1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.



We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



## TO ASSEMBLE:


1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Drill 4 holes in wall in line with 4 holes of back plate(B), Insert plastic anchors(U) into drilled holes. Attach **mounting plate(A)** to wall or junction box using mounting screws (J).
4. Connect ground wire from wall to ground wire from lamp by using wire caps (K).
5. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(K). **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
6. Attach and fasten back plate(B) to wall by screwing the 4 strengthen screws(C) provided in the plastic anchors(U)
7. Remove the metal ring(G), top glass sheet (F) and bottom glass sheet (P) from the lamp assembly(I) by screwdriver in a counter-clockwise direction.
8. Insert 2 TYPE-G 8W LED bulb(not included) into socket (Q). **DO NOT EXCEED SPECIFIED WATTAGE OF SCONCE**
9. Assemble metal ring(G), top glass sheet (F) and bottom glass sheet(P) with lamp assembly(I) by screwdriver in a clockwise direction carefully.
10. Attach the back plate(E) to **back plate(B)** by using the enclosed screw nut(M) and rubber washer(L). Tighten screws nut by turning in a clockwise direction until tight. Please be sure the rubber washer(L) is on top threading of the screw nut(M). And please note that the screw nut (M) is shorter than the screw nut (O).
11. **Make sure the glass sheet (F) with NO hole sits at top and the bottom glass sheet(P) with hole sits at bottom.**
12. Use the outdoor silicone caulking compound to caulk completely along the rim of back plate(E) where it meets the wall surface, but leaving a space without the caulking compound at the bottom of back plate to allow the water to seep out if water entered into the J-Box by accident. See more details on extra page.
13. Attach metal frame(N) to back plate(E) by using the enclosed screw nut(O) and rubber washer(L). Tighten screws nut by turning in a clockwise direction until tight. Please be sure the rubber washer(L) is on top threading of the screw nut(O).
14. Restore power to junction box and test fixture.



## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of

ARTERIO RS

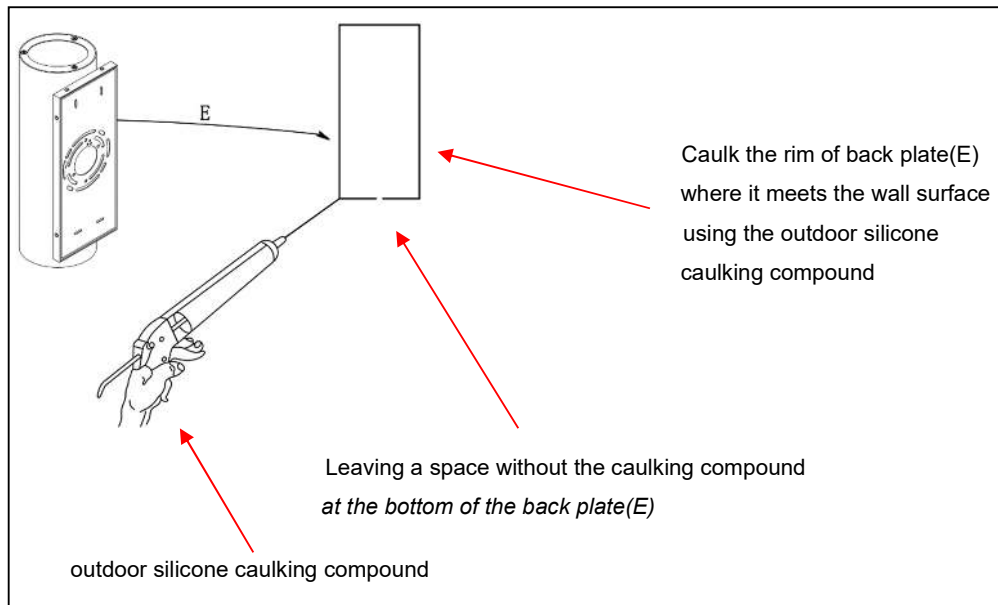

To prevent the water from entering the J-box and causing a short circuit, use the outdoor silicone caulking compound to caulk completely along the rim of back plate(E) where it meets the wall surface, but leaving a space without the caulking compound at the bottom of back plate(E).

**NOTE:** Mounting surface should be clean, dry, flat, and a 1/4 inch larger than the back plate(E) on all sides.

\*\*\*\*\*

## OUTDOOR INSTALLATION

Use silicone caulk to seal fixture where the mounting plate meets the surface to prevent water from seeping in.