


**Sanitary Napkin Disposal – Surface Mounted**

Feminine Hygiene Vendors and Disposals

MasterFormat Section 10 28 13

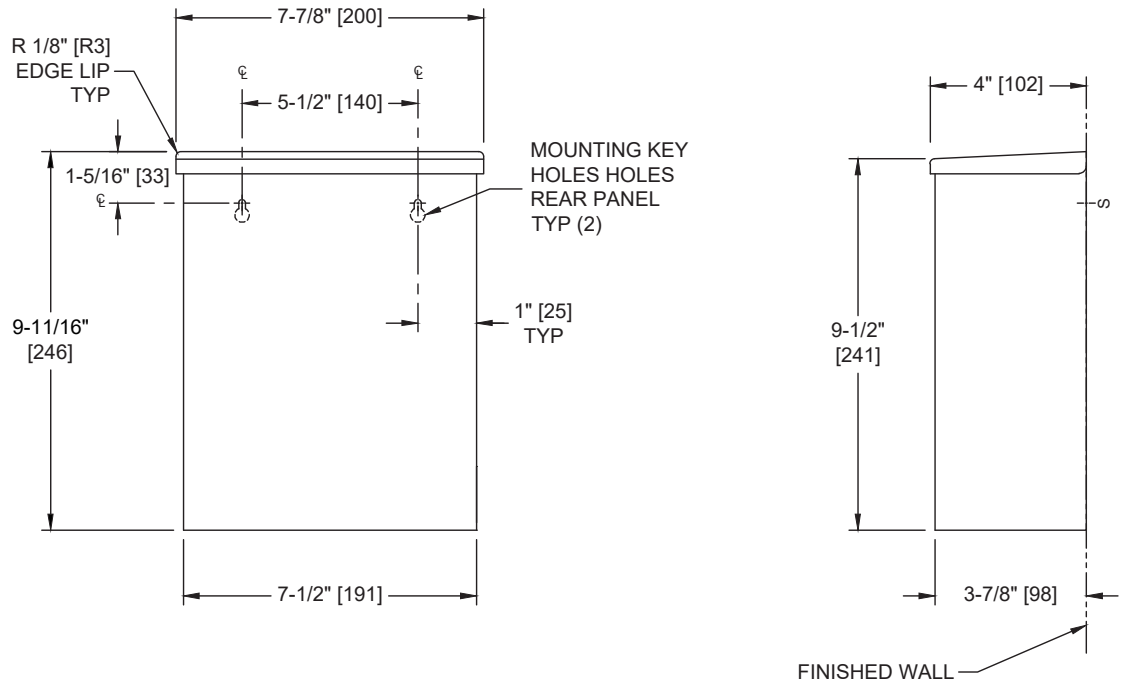

Scan for Information



**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)  
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

**NOTE:**  
ALL DIM'S INCH [MM]  
ILLUSTRATION FOR REF ONLY AND NTS  
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN  
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

**PRODUCT OVERVIEW**

Unit equipped with top cover door and cabinet. Waste capacity of 1.2 gal (4.5L). User lifts lid to deposit waste material. Door, flanges, waste receptacle and cabinet shall be 22 gauge type 304 stainless steel alloy 18-8. Shall have top cover door and cabinet of 22 gage type 304 stainless steel alloy 18-8.

**KEY FEATURES & SPECIFICATIONS**

- Type 304 Stainless Steel - Satin Finish
- Surface Mounted
- 1.2 gal (4.5 L) of dry/solids Waste Capacity

**OPERATION & MAINTENANCE**

User lifts lid to deposit waste material. Maintenance schedule determines trash removal cycle. Unit is emptied by opening top door and removing wax paper collection bag. Waxed paper liner bags are furnished by others.

**TECHNICAL INFORMATION / PRODUCT PROPERTIES**

| Property     | Value   |
|--------------|---|
| Dimensions   | 7 -7/8" [200] W x 4" [102] D x 9-11/16" [246] H |
| Construction | Type 304 Stainless Steel - Satin Finish         |
| Mounting     | Surface Mounted                                 |
| Capacity     | 1.2 gal (4.5 L) of dry/solids Waste Capacity    |

**INSTALLATION**

Surface mount unit on wall or partition using #10 self-threading screws (by others). Two (2) mounting holes through back are keyhole slots for ease in hanging unit on pre-installed screws. For compliance with 2010 ADA Accessibility Standards, install unit so that top cover is 44" [1118] maximum above finished floor.

**WARRANTY**

One (1) Year from date of Invoice