

SEN 984

Coraline Sliding Shower Enclosure

The Coraline Collection by Aston, offers an extensive variety of Completely Frameless Sliding Shower Doors and Enclosures that are as beautiful as they are functional. All models are beautifully designed with 3/8 in. thick tempered glass and an innovative two-wheeled sliding operation, available with stainless steel, chrome or oil rubbed bronze hardware options. The Coraline collection is sure to deliver style and sleek sophistication to any residential or commercial installation. The Coraline collection features Shower Doors for 3-wall alcoves, Enclosures for 2-wall installations, which are available with an acrylic shower base as well as a Tub Door model. Coraline's variety of finishes and glass styles will create an upscale custom solution for any project.

- Premium Clear or Frosted 3/8" (10mm) tempered safety glass
- "Effortless Opening" 2-wheel roller system
- Engineered for left or right handed door installation
- Accommodates "Out of Plumb" openings of up to ¼" per side
- Variable width shower door, without base, width can be reduced up to 4"
- Full-length clear seals included
- Installation hardware included

CORALINE Collection

COMPLETELY FRAMELESS SLIDING SHOWER DOORS



STAINLESS STEEL



POLISHED CHROME



OIL RUBBED BRONZE (NOT AVAILABLE ON 72"W MODELS)



FROSTED GLASS



CLEAR GLASS



3/8 in. (10 mm) CERTIFIED TEMPERED GLASS



CHROME HARDWARE STAINLESS STEEL

HARDWARE






OIL RUBBED BRONZE



SEN 984 - Coraline Sliding Shower Enclosure



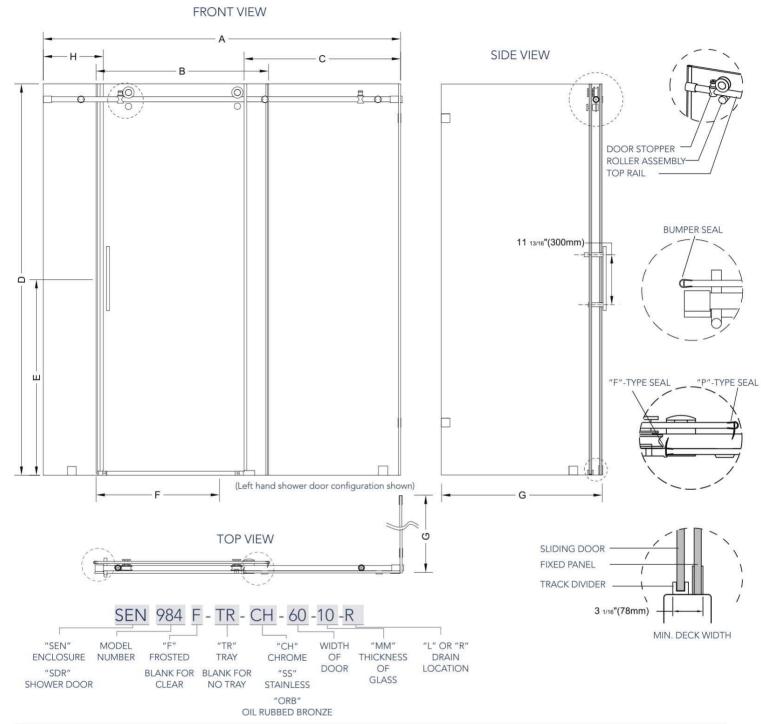

MODEL	WALL OPENING (A)	DOOR PANEL (B)	FIXED PANEL (C)) HEIGHT (E	HANDLE D) HEIGHT (E)	ENTRY	OPENING (F)	RETURN PANEL (G)	FIXED PANEL (H)
SEN984-48-10	44 - 48"	26 %"	23 ¾16"	75"	37 1/2"	17 ³/	/16 - 21 ³/16"	33 ¹³ /16"	N/A
SEN984-60-10	56 - 60"	32 ½"	29 1/2"	75"	37 1/2"	22	7/8 - 26 ⁷ /8"	33 13/16"	N/A
SEN984-72-10	68 - 72"	32 ½"	29 ½"	75"	37 1/2"	22 7/8 - 26 7/8"		33 13/16"	13 ½"
MODEL	WAI OPENIN	State of the second	GHT (D)	HANDLE HEIGHT (E)	ENTRY OPENING (F)	BASE WIDTH (I)	BASE LENGTH (J)	BASE HEIGHT (K)	DRAIN (L)
SEN984-TR-48-	10 48′	" 7	7 1/2"	40"	21 ¾16"	35 ¹³ / ₃₂ "	48³/s"	2 ½"	L/R
SEN984-TR-60-	10 60'	7	7 1/2"	40"	26 1/8"	35 13/32"	603/8"	2 1/2"	L/R