
MORTISE CYLINDER SPECIFICATIONS

Mortise Lock Cylinders

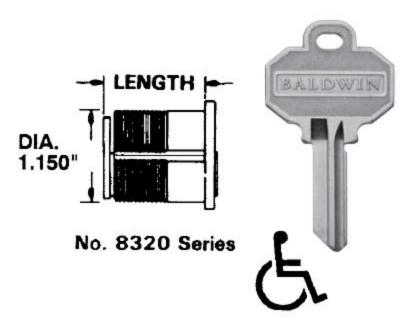

Length of Mortise Cylinders: The length of a Baldwin cylinder is the measurement from the back edge of the cylinder cap to the outer surface of the cam as illustrated.

	Item Number			
C(03) Keyway	E(05) Keyway	F(06) Keyway	Cylinder Length	
8321	8341	8361	1″	(25mm)
8322	8342	8362	1.125"	(29mm)
8323	8343	8363	1.25"	(32mm)
8324	8344	8364	1.375"	(35mm)
8325	8345	8365	1.5"	(38mm)
8326	_	_	1.625"	(41mm)
8327	-		1.75"	(44mm)
8328	_	_	2"	(51mm)
8329	-	_	2.25"	(57mm)
8330	-	9 0 30	2.5"	(64mm)

Features: Baldwin 6 pin (5 pin for 1" [25mm]) precision mortise cylinders are made of solid extruded brass. Finish is applied to cap only.

When ordered separately, cylinders are supplied with 2 nickel silver keys. Cam 8300.509.STD is furnished. Cams illustrated on page K/10 can be ordered at additional charge. Cylinder lengths greater than 1.5" (38mm) are not available for E(05) and F(06) keyway Cylinders.

Keying Requirements: Available in a multitude of keying arrangements including Master, Grand Master and Construction Keying Levels.

Ordering Instructions: Standard Mortise Cylinder: Specify item number and finish.

Hotel Mortise Cylinder: Specify item number, finish with suffix "H". Cylinder price includes all MK charges and standard key bow. Cylinder is available with 6 pin keying only.