

Field Tile Sizes



Bianco - BI
CRDPULBI1224 - 12"x24" Rectified Field Tile - Honed




Grigio - GR
CRDPULGR1224 - 12"x24" Rectified Field Tile - Honed



Tortora - TO
CRDPULTO1224 - 12"x24" Rectified Field Tile - Honed



Beige - BE
CRDPULBE1224 - 12"x24" Rectified Field Tile - Honed

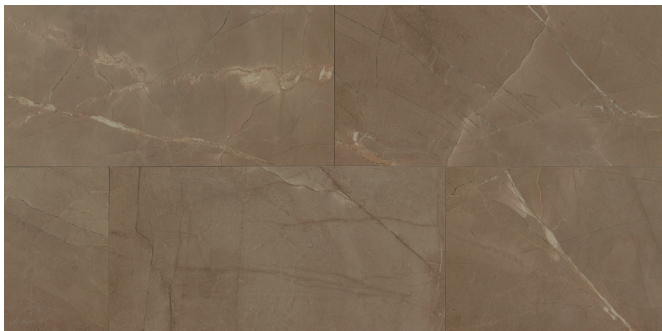

Puro - PU
CRDPULPU1224 - 12"x24" Rectified Field Tile - Honed

1"x4" Mosaic - Honed (12"x12" Sheet)




Bianco
100000239



Grigio
100000240



Tortora
100000242



Beige
100000237



Puro
100000241



Pulpis

Glazed Color Body Porcelain

Photo Features 12"x24" Rectified Field Tile - Honed in Grigio.


SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		CRDPUL•1224	12"x24"	Rectified Field Tile - Honed	6	11.63
Trim		CRDPUL•424BN	4"x24"	Flat Top Bullnose - Honed	10	-
Mosaic		Ø 100000239	12"x12" Sheet	1"x4" Mosaic - Honed in Bianco	5	-
		Ø 100000240	12"x12" Sheet	1"x4" Mosaic - Honed in Grigio	5	-
		Ø 100000242	12"x12" Sheet	1"x4" Mosaic - Honed in Tortora	5	-
		Ø 100000237	12"x12" Sheet	1"x4" Mosaic - Honed in Beige	5	-
		Ø 100000241	12"x12" Sheet	1"x4" Mosaic - Honed in Puro	5	-

ANSI TECHNICAL SPECIFICATIONS


	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	Pass ≤ 175 (ISO)	Unaffected	N/A	Pass (1,300 ISO)	≤ 0.5%	Unaffected

Shade Variation




APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	●	◻	◻	●	◻	◻
Commercial	●	◻	◻	●	◻	◻



LEGEND

- ◻ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- Ø Applications & ANSI Technical Specifications do not apply
- * Special Order only



Use of a leveling system during installation is strongly recommended

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

