



White - WHI
DECREIWHI311PICG
3"x12" Picket Pattern Field Tile - Gloss




White - WHI
DECREIWHI311PICM
3"x12" Picket Pattern Field Tile - Matte



Ivory - IVO
DECREIIVO311PICM
3"x12" Picket Pattern Field Tile - Matte



Grey - GRE
DECREIGRE311PICM
3"x12" Picket Pattern Field Tile - Matte

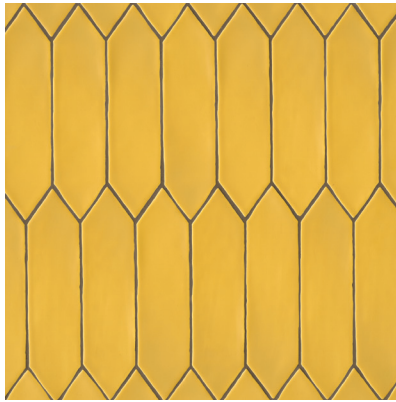

Golden - GOL
DECREIGOL311PICM
3"x12" Picket Pattern Field Tile - Matte



Castle Moss Green - CMG
DECREICMG311PICM
3"x12" Picket Pattern Field Tile - Matte



Gentleman's Grey - GEG
DECREIGEG311PICM
3"x12" Picket Pattern Field Tile - Matte



Dark Teal - DAT
DECREIDAT311PICM
3"x12" Picket Pattern Field Tile - Matte



Black - BLA
DECREIBLA311PICM
3"x12" Picket Pattern Field Tile - Matte



White - WHI
DECREIWHIJOLG
1/2"x8" Jolly - Miter Edge Trim - Gloss



Available in All Colors
DECREI***JOLM
1/2"x8" Jolly - Miter Edge Trim - Matte



Reine

Decorative (Glazed Ceramic)

Photo Features 3"x12" Picket Pattern Field Tile - Matte in Dark Teal.


SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		DECREI---311PICM	3"x12"	Picket Pattern Field Tile - Matte	34	6.90
		DECREIWHI311PICG	3"x12"	Picket Pattern Field Tile - White Gloss	34	6.90
Trim		DECREI---JOLM	1/2"x8"	Jolly - Miter Edge Trim - Matte	50	-
		DECREIWHIJOLG	1/2"x8"	Jolly - Miter Edge Trim - White Gloss	50	-

ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650	Bond Strength A137.2-7.7	Thermal Shock ASTM# C484
Results	N/A	3	ISO ≥ 600 N	>1.0 (Ceramic)	Unaffected	N/A	Pass

Shade Variation



V4-High

APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential		●			●	
Commercial		●			●	



Made in Spain

LEGEND

- Product rated for Interior & Exterior use
- Applications & ANSI Technical Specifications do not apply
- Product rated for Interior use only
- * Special Order only
- † May be suitable for Exterior Floors



Glazed Ceramic

This product may be installed near or on the face of interior high-heat areas, but not inside. This product cannot be installed in exterior or submerged applications. The product may be installed on shower walls. No spas or steamrooms. This product cannot be installed in exterior applications, wet areas, and/or high-heat areas. Do not use chlorine, acids, or other harsh chemicals to clean. Use only non-sanded grout with this product. This product is artisanal and may possess inherent size and color variation. This tile must be installed with premium modified thinset. Do not use mastic.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

