


Field Tile Sizes



Cerdena - CER
NATCOTCER1414G - 14"x14" Cotto Field Tile - Gloss
NATCOTCER1414M ♦ - 14"x14" Cotto Field Tile - Matte

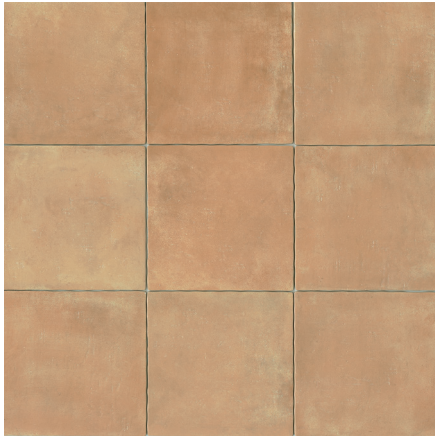

Siena - SIE
NATCOTSIE1414G - 14"x14" Cotto Field Tile - Gloss
NATCOTSIE1414M ♦ - 14"x14" Cotto Field Tile - Matte



Sicilia - SIC
NATCOTSIC1414G - 14"x14" Cotto Field Tile - Gloss
NATCOTSIC1414M ♦ - 14"x14" Cotto Field Tile - Matte

Hand Painted Deco Sizes



Tira Versilia
NATCOTTIRVER314 - 3"x14" Liner - Gloss



Tira Volterra
NATCOTTIRVOL314 - 3"x14" Liner - Gloss



Tira Sandro
NATCOTTIRSAN314 - 3"x14" Liner - Gloss



Tira Versilia
NATCOTTIRVER33 - 3"x3" Dot/Corner - Gloss



Tira Volterra
NATCOTTIRVOL33 - 3"x3" Dot/Corner - Gloss



Tira Sandro
NATCOTTIRSAN33 - 3"x3" Dot/Corner - Gloss

♦ An anti-slip version of the 14"x14" field tile can be special ordered. Lead time = 10 to 12 weeks.









Cotto Nature

Glazed Porcelain

Photo Features 14"x14" Cotto Field Tile - Matte in Siena.

SIZING & PACKAGING


Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		NATCOT***I414G	14"x14"	Cotto Field Tile - Gloss	8	10.76
		NATCOT***I414M♦	14"x14"	Cotto Field Tile - Matte	8	10.76
Decos		∅ NATCOTTIR***33	3"x3"	Tira Hand Painted Dot/Corner - Gloss	25	-
		∅ NATCOTTIR***314	3"x14"	Tira Hand Painted Liner - Gloss	-	-
Trim		∅ NATCOT***S414G	4"x14"	Surface Bullnose - Gloss	30	-
		NATCOT***S414M	4"x14"	Surface Bullnose - Matte	30	-

♦ An anti-slip version of the 14"x14" field tile can be special ordered. Lead time = 10 to 12 weeks.

ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	N/A	3	Unaffected	7	≥ 250 lbf	≤ 0.5%	Unaffected

Shade Variation





APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	●	◻	◻		◻	◻
Commercial		◻	◻		◻	◻

LEGEND

- ◻ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ∅ Applications & ANSI Technical Specifications do not apply
- * Special Order only



Minimum grout joint must be 3/16 inch. Please refer to the most current TCNA Handbook for installation guidelines.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

