

Sizes



Beige Oak
100002174 - 7"x48" SPC Vinyl



Grey Oak
100002175 - 7"x48" SPC Vinyl



Tawney Oak
100002173 - 7"x48" SPC Vinyl



Silver Oak
100002172 - 7"x48" SPC Vinyl



Brown Oak
100002176 - 7"x48" SPC Vinyl



Barnwood Oak
100002171 - 7"x48" SPC Vinyl



Quarter Rounds

Quarter Rounds molding is used with baseboards and can be useful to cover gaps where baseboard meets the floor.



Beige Oak 100000354	Brown Oak 100000356	Tawney Oak 100000352	Grey Oak 100000353	Silver Oak 100000351	Barnwood Oak 100000350
-------------------------------	-------------------------------	--------------------------------	------------------------------	--------------------------------	----------------------------------



94.5" x 1.0" x 0.59"

Stair Nose

Stair Nose molding is used to protect the edges of the treads of your stairs. They minimize the scuffs, scratches and stains that mar the surface. They take the brunt of the wear and tear and prolong the life span of your stairs, therefore, minimizing your maintenance costs.



Beige Oak 100002168	Brown Oak 100002169	Tawney Oak 100002166	Grey Oak 100002167	Silver Oak 100002165	Barnwood Oak 100002164
-------------------------------	-------------------------------	--------------------------------	------------------------------	--------------------------------	----------------------------------



94.5" x 4.5" x 0.94"

Reducer Molding

Reducer Molding is used when two floors of slightly different thicknesses come together, such as laminate floor and a wood, vinyl, ceramic or low-pile carpet floor.

*Must purchase U-Track to install Reducer Molding (100000359)



Beige Oak 100000336	Brown Oak 100000338	Tawney Oak 100000334	Grey Oak 100000335	Silver Oak 100000333	Barnwood Oak 100000332
-------------------------------	-------------------------------	--------------------------------	------------------------------	--------------------------------	----------------------------------



94.5" x 1.7" x 0.28"


T-Molding

T-molding is used as a bridge between two floors of approximately equal height, especially used in doorways without thresholds. T-Molding are also used to provide expansion joints when a floor dimension exceeds the length or width of 40'.

*Must purchase U-Track to install T-Molding (100000359)





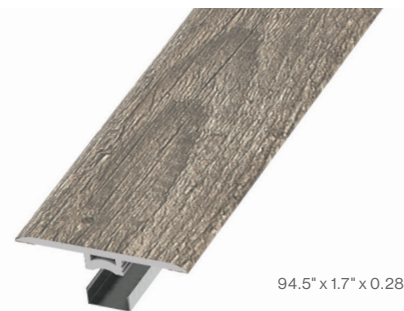




Beige Oak 100000327	Brown Oak 100000329	Tawney Oak 100000325	Grey Oak 100000326	Silver Oak 100000324	Barnwood Oak 100000323
-------------------------------	-------------------------------	--------------------------------	------------------------------	--------------------------------	----------------------------------



94.5" x 1.7" x 0.28"


SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Plank		100000***	7"x48"	SPC Vinyl - 22 Mil Wear Layer with UV Cured Polyurethane & Ceramic Bead Finishes - Bardwood Oak, Silver Oak, Tawney Oak	10	23.75
		100000***	7"x48"	SPC Vinyl - 22 Mil Wear Layer with UV Cured Polyurethane & Ceramic Bead Finishes - Grey Oak, Beige Oak, Brown Oak	10	23.75
Trim		100000***	94.5"x1.0"x0.59"	Madera Quarter Round 94.5" x 1.0" x 0.59"	-	-
		100000***	94.5"x4.5"x0.59"	Madera Flush Stair Nose 94.5" x 4.5" x 0.94"	-	-
		100000***	94.5"x1.7"x0.28"	Madera Reducer 94.5" x 1.7" x 0.275"	-	-
		100000***	94.5"x1.7"x0.28"	Madera T-Mold 94.5" x 1.7" x 0.275"	-	-
		100000359	94.5" x .047" x 0.16"	Madera/Cassio Plastic U Track 94.5" x .047" x 0.16"	-	-

TECHNICAL SPECIFICATIONS

Standard	Description	Result
ASTM F-386	Total Thickness	6.0 mm
ASTM F-410	Wear Layer Thickness	0.5 mm (22 mil)
ASTM E-648	Critical Radiant Flux	Class I
ASTM F-925	Chemical Resistance	No Change in 24 Hours
ASTM F-970	Static Load Limit	1,500 p.s.i.
ASTM F-1514	Heat Stability	< 8.0 Delta E (Pass)
ASTM F-1515	Light Stability	< 8.0 Delta E (Pass)
ASTM F-1914	Residual Indentation	< 0.002"
ISO 23999	Size Change	Pass
ASTM F-2421	Size & Squareness	< 0.25%
ASTM D-2047	Static Coefficient of Friction	Meets or Exceeds 0.6 Dry
ISO 23999	Cupping/Curling	≤ 0.1 mm
ASTM E-492	Impact Sound Transmission (IIC)	IIC 63
ASTM E-90	Airborne Sound Transmission (STC)	STC 53
ASTM E-2179	Impact Sound Reduction (ΔIIC)	ΔIIC 24
Performance	Scratch/Scuff Resistance	Excellent
Warranty	Residential	Lifetime
Warranty	Commercial	10 Years


LAYING PATTERNS



30% Offset



50% Offset



Random

APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	●					
Commercial	●					

LEGEND

 Product rated for Interior & Exterior use
 ● Product rated for Interior use only
 † May be suitable for Exterior Floors
 * Special Order only

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Product is subject to variation in color/shade, size, texture, and finish. Blend product from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the packaging for installation guidance. We reserve the right to make product changes at any time without notice.

