
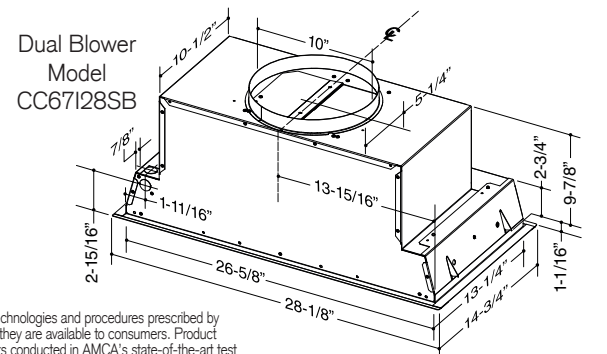
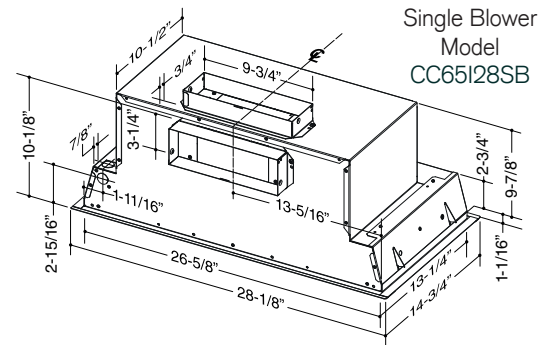
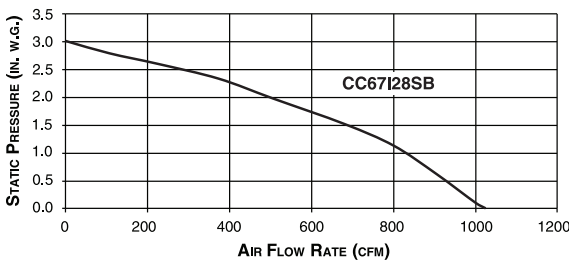


BLOWER	MODEL	GREASE FILTERS (replacement)
Single	CC65I28SB	SV18428
Dual	CC67I28SB	SV18428

PERFORMANCE								
Blower	Duct Size & Discharge	Volts	Hz	Amps	Sones		CFM	
					Low	High	Low	High
Single	3¼-in. x 10-in. Vertical	120	60	3.0	2.0	11.5	200	570 ‡
	3¼-in. x 10-in. Horizontal	120	60	2.9	2.0	10.5	190	570 ‡
Dual	10-in. Round	120	60	9.5	1.5	12.0	370	1000

‡ If needed, ask a recommended installer to limit discharge to 300 CFM.

FEATURES	
Finish	430 Stainless Steel
Cooktop Lighting	2 LED Modules - 120 V, 5.5 W
Grease Filters	Hybrid Baffle, Stainless Steel with Aluminum Mesh - Dishwasher Safe
Damper	3¼-in. x 10-in. (Included with CC65) 10-in. Round (Included with CC67)
OPTIONAL ACCESSORIES	
30" Liner	ALCC630SB
36" Liner	ALCC636SB
42" Liner	ALCC642SB
CFM Reducer Kit	ARP310 (for use with CC65)
MOUNTING HEIGHT	
24-in. to 30-in. from cooktop to bottom of hood	
LIMITED WARRANTY	
5-year 2-year (labour only) (See installation manual for full warranty text.)	
FOR INDOOR USE ONLY	

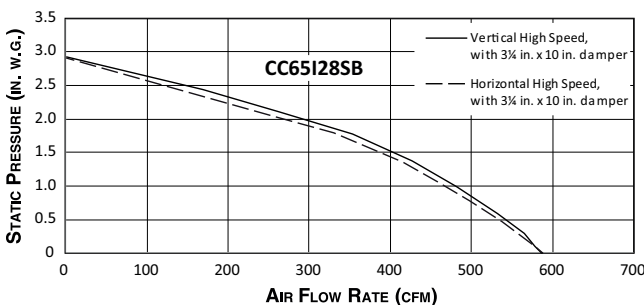

SPECIFICATION SHEET

# ALEFRUN - CC6 SERIES



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

VENTILATEUR	MODÈLE	FILTRES À GRAISSES (remplacement)
Simple	CC65I28SB	SV18428
Double	CC67I28SB	SV18428

PERFORMANCE								
Ventilateur	Format de conduit & évacuation	Volts	Hz	Ampères	Sones		pi <sup>3</sup> /min	
					Basse	Haute	Basse	Haute
Simple	3¼ po x 10 po verticale	120	60	3,0	2,0	11,5	200	570 ‡
	3¼ po x 10 po horizontale	120	60	2,9	2,0	10,5	190	570 ‡
Double	10 po rond	120	60	9,5	1,5	12,0	370	1000

‡ Au besoin, demander à un installateur recommandé de limiter l'évacuation à 300 pi<sup>3</sup>/min.





CARACTÉRISTIQUES	
Fini	Acier inoxydable 430
Éclairage	2 Modules à DEL - 120 V, 5,5 W
Filtres à graisses	À chicane hybrides, Acier inox et maillage d'aluminium - Lavables au lave-vaisselle
Volet	3¼ po x 10 po (Inclus avec CC65) 10 po rond (Inclus avec CC67)

ACCESSOIRES OPTIONNELS	
Revêtement d'armoire de 30 po	ALCC630SB
Revêtement d'armoire de 36 po	ALCC636SB
Revêtement d'armoire de 42 po	ALCC642SB
Réducteur de débit	ARP310 (pour utilisation avec CC65)

**HAUTEUR D'INSTALLATION**  
De 24 po à 30 po de la surface de cuisson au bas de la hotte

**GARANTIE LIMITÉE**  
5 ans  
2 ans (main-d'œuvre)  
(Voir le manuel d'installation pour le texte complet de la garantie.)

**POUR UTILISATION À L'INTÉRIEUR SEULEMENT**

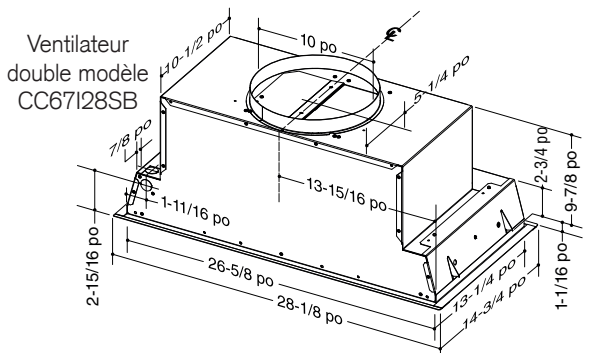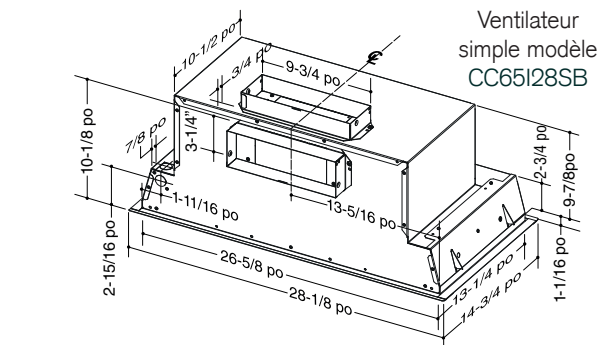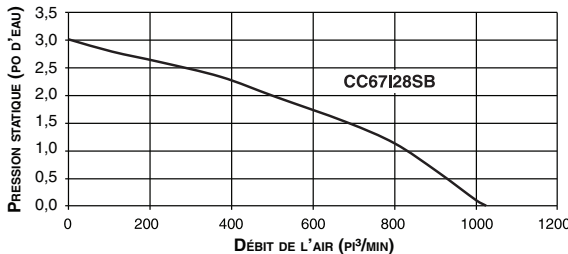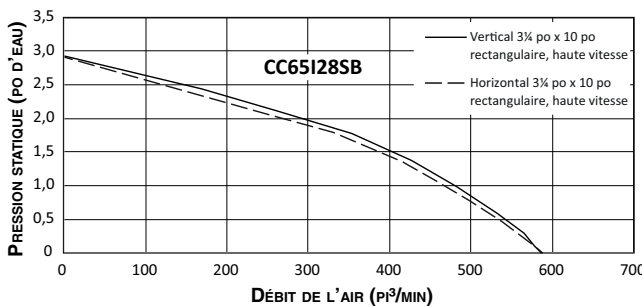

L'HOMOLOGATION HVI-2100 est conforme aux nouvelles techniques et procédures d'essai prescrites par le Home Ventilating Institute pour les produits d'emploi courant, dès leur disponibilité pour les consommateurs. Le rendement du produit est évalué à une pression statique de 0,1 po, d'après les tests effectués dans le laboratoire d'essai ultra-perfectionné de l'AMCA. Le sone est une mesure de la perception humaine de la puissance sonore, d'après des mesures effectuées en laboratoire.