



Heat Sentry™ detects excessive heat and adjusts speed to high automatically.

Works with optional Universal Make-Up Air Dampers.

Separate On/Off speed control gives you the convenience of automatically remembering favorite setting.

Available only in the U.S.

**Model Numbers:**

- CP34I309SB
- CP34I429SB
- CP35I369SB
- CP37I482SB
- CP34I369SB
- CP35I309SB
- CP35I429SB



The Custom Hood Liner easy install system comes with liner, blower, filtration, controls, lighting and damper.



Rotary controls for two-level lighting and variable blower speeds enable the user to choose operating preferences.



**Hood Sizes**

<b>Widths</b>	<b>28-3/8", 34-3/8", 40-3/8" on CP34, CP35   46-3/8" on CP37</b>
<b>Depths</b>	<b>19-1/4" on CP34, CP35 22-1/2" on CP37</b>

**Finish**

Stocked	Brushed Stainless Steel
Special Order	Not Available

**Features**

Lighting Type	Halogen, MR16; GU10-50W
Number of Lamps	2
Lighting Levels	2
Lighting Lamps Included	Yes
Control Type	Variable Speed, Rotary with Separate On/Off Control
Control Features	Heat Sentry™
Remote Control	Not Available
Filter Type	Stainless Steel Baffle Filter
Non-ducted Capability	No

**Hood Blower Included (CP3)**



Internal Blower Model	CP34	CP35	CP37
Blower CFM Low/High	130/290	190/600	380/1200
Sones Low/High	3.0/11.5	2.0/12.0	2.0/13.5

**Accessories**

Non-ducted Recirculating Kit	Not Available
Liners	Not Available
Universal MUA Damper	MD6TU, MD8TU, MD10TU

**Installation Requirements**

Amps @ 120V	9.0 Max
Electrical	Direct Wire
Duct Size: Internal Blower	CP34 & CP35: 8", CP37: 10"
Duct Direction	Vertical
Backdraft Damper	Included

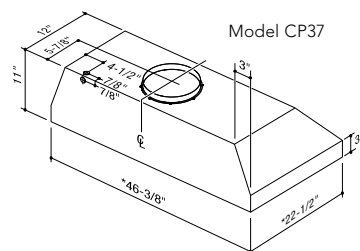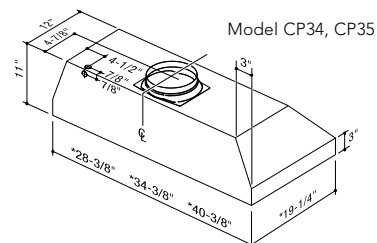

Installation height above the cooking surface: 24"-30"

For more details see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)

\*Allow 1/8" clearance on all measurements