
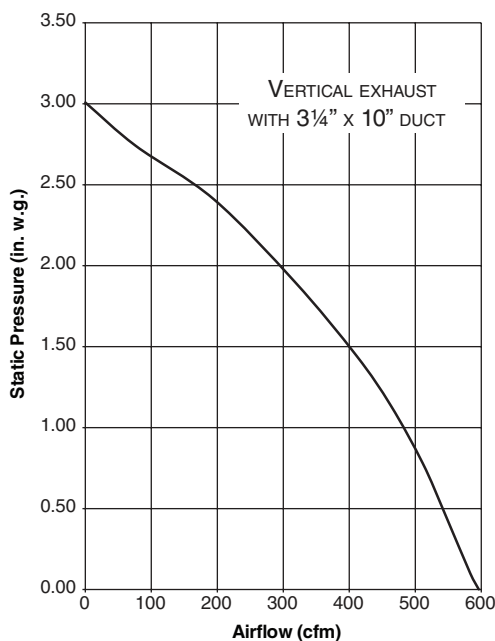


| SIZE | MODEL | REPLACEMENT GREASE FILTERS |
|--------|-----------|----------------------------|
| 30-in. | WCP3I30SB | 62053 |
| 36-in. | WCP3I36SB | 62053 |

| PERFORMANCE | | | | | | | |
|----------------------------|-------|----|------|-------|------|-----|------|
| Damper/Duct Connector | Volts | Hz | Amps | Sones | | CFM | |
| | | | | Low | High | Low | High |
| 3¼-in. x 10-in. (Included) | 120 | 60 | 3.9 | 1.5 | 11.0 | 200 | 550‡ |
| 6-in. Round (Included) | | | | | | | |

‡ If needed, ask a recommended installer to limit discharge to 300 CFM.

| FEATURES | |
|---|---|
| Wall Mount | Yes |
| Finish | 430 Stainless Steel |
| Cooktop Lighting | 2 LED Modules - 120V, 6.5W |
| Grease Filters | Hybrid Baffle, Stainless Steel with Aluminum Mesh - Dishwasher Safe |
| OPTIONAL ACCESSORIES | |
| 10' Flue Extension (Ducted) | AEWCP3SB |
| Recirculation Kit | HRKBSS |
| Non-Duct Filter | FILTER ECB |
| CFM Reducer Kit | ARP6 (6-in. Round) ARP310 (3¼-in. x 10-in.) |
| MOUNTING HEIGHT | |
| 24-in. to 30-in. from cooktop to bottom of hood | |
| LIMITED WARRANTY | |
| 5-year (See installation manual for full warranty text.) | |
| FOR INDOOR USE ONLY | |

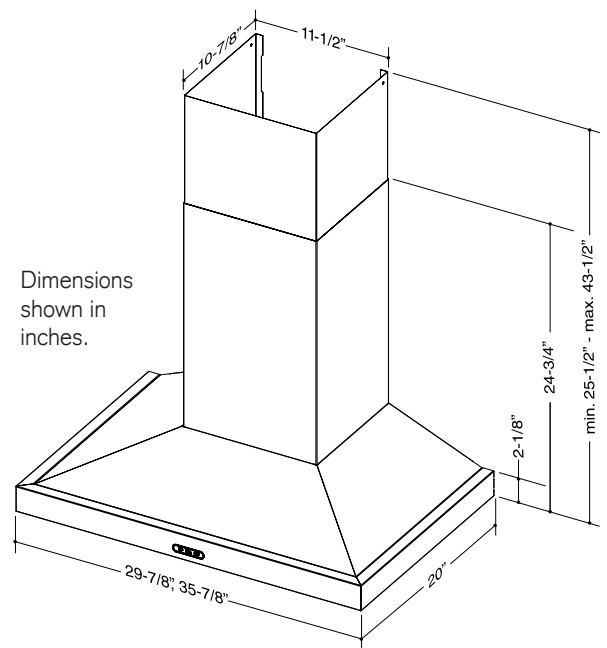

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.