36" Induction Cooktop with Touch Control 500 Series - Black with Stainless Steel Strips NIT5665UC





Features and Benefits

Key Features

- Dual 11" Heating Element with Powerful 4400W. Most Powerful Induction Element in its Class.
- SpeedBoost™ This Fast-heat Mode Boils Water Twice as Fast as Conventional Electric Cooktops, Saving Time and Energy.
- CountDown Timer Built-In Timers for Each Element. Doubles as General-Purpose Kitchen Timer.
- PreciseSelect[™] Direct Cooking Level Selection (17 Settings)

Design

- Front and Back Stainless Steel Strip for a Premium Look
- Sleek Touch Control Panel Offers a Choice of 17 Settings for Unprecedented Temperature Control.

Performance

- Dual 11" Heating Element with Powerful 4400W. Most Powerful Induction Element in its Class.
- SpeedBoost™ This Fast-heat Mode Boils Water Twice as Fast as Conventional Electric Cooktops, Saving Time and Energy.
- PreciseSelect™ Direct Cooking Level Selection (17 Settings)

Efficiency

 PotSense™ - Automatically Adjusts Cooking Element to the Size of the Pan Bottom


Convenience

- CountDown Timer Built-In Timers for Each Element. Doubles as General-Purpose Kitchen Timer.
- Overflow Detection Sounds Alarm and Shuts off Cooktop in Case of an Overflow
- ChildLock Prevents the Cooktop from Being Accidentially Switched on. Locks Temperature Settings if in Use.
- SafeStart Ensures that Element is Only Activated, if Suitable Cookware is in Position; no Activation When Other Metal Objects are Placed on Element
- Anti-Overheat System Shuts off Cooktop, if Surface Temperature Exceeds a Set Value
- 2-Level Heat Indicator Warns if Cooktop is Warm or Hot
- Clean Lock Prevents Unwanted Changing of Settings while Cleaning Spill-Overs.

Notes: All height, width and depth dimensions are shown in inches. *Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be foundin a ccompanying product literature or you may contact your account manager for further details.

36" Induction Cooktop with Touch Control 500 Series - Black with Stainless Steel Strips NIT5665UC



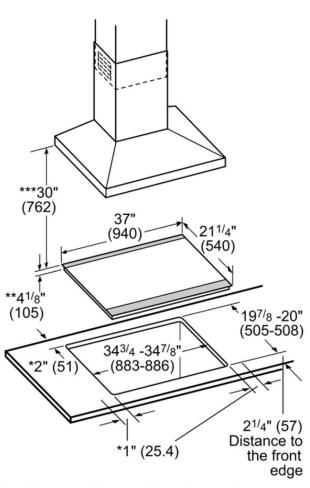

- Minimum distance from the cooktop cutout to the wall
- ** Installed depth includes 1" (26 mm) air clearance
- *** Minimum distance between surface of the cooktop and lower edge of the exhaust hood.

Features	
Knob Material	
Sealed Burners	No
Burners with booster	All
Type of grate	
Total BTU load	
LP Gas Connection Rating (BTU)	
Power of 1st heating element (kW in boost)	2.5
Dimension of 1st heating element (in)	7"
Power of 2nd heating element (kW in boost)	2.5
Dimension of 2nd heating element (in)	7"
Power of 3rd heating element (kW in boost)	3.6, 4.4, 2.5
Dimension of 3rd heating element (in)	11", 7"
Power of 4th heating element (kW in boost)	1.8
Dimension of 4th heating element (in)	6"
Power of 5th heating element (kW in boost)	3.3
Dimension of 5th heating element (in)	9"
Power of 6th heating element (kW in boost)	
Dimension of 6th heating element (in)	

Technical S	Specification
-------------	---------------

UPC code	825225866206
Variant color	Black
Energy source	Electric
Gas type	
Alternative gas type	
Watts (W)	10800
Current (A)	50
Volts (V)	208-240
Frequency (Hz)	60
Approval certificates	CSA
Power Cord Length	37"
Plug type	no plug
Required cutout size (HxWxD) (in)	4 1/8" x 34 3/4" x 19 7/8"
Minimum distance from counter front (in)	2 1/4"
Minimum distance from rear wall (in)	2"
Overall appliance dimensions (HxWxD) (in)	5/16"+4 1/8" x
	37" x 21 1/4"
Product packaging dimensions (HxWxD) (in)	7 1/16" x 42
	1/8" x 26 5/8"
Net weight (lbs)	50
Gross weight (lbs)	60
Total number of cooktop burners	5
Total Hambor of cooktop barrioro	<u> </u>

Dimensions in inches (mm)

Notes: All height, width and depth dimensions are shown in inches. *Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be foundin a ccompanying product literature or you may contact your account manager for further details.