



Face of plasterguard should be flush with finish wall line 6 1/2" (165 mm) Square

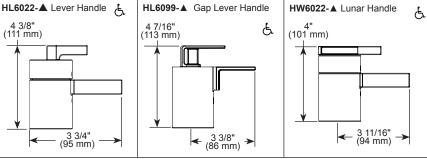



▲ Designate proper finish suffix

BRIZO

THERMOSTATIC VALVE TRIM

- Frank Lloyd Wright[®] Bath Collection by Brizo[®]
- TempAssure® Thermostatic
- Valve Only

FEATURES:

• TempAssure® thermostatic valve cartridge

STANDARD SPECIFICATIONS:

- Thermostatic wax element maintains the outlet temperature to $\pm 3.6\,^{\circ}\text{F}$
- Must also order MultiChoice[®] Universal rough valve body (R60000 Series)
- · Back-to-back installation capability
- Bottom (2) handles control on/off and temperature
- Graphics indicate hot/cold temperature adjustment
- Field adjustable to limit handle rotation into hot water zone
- All parts replaceable from the front of the valve
- Adjusts for up to 1" wall thickness. Optional extension kit (RP74785) extends rough installation up to 1 3/4"
- LHP Less Handle Product. See handle options below

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1/ CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16 LICC/ANSI A117.1