

# BRIZO®

## TUB AND SHOWER FAUCET TRIM


- Beauclere™ Bath Collection
- TempAssure® Thermostatic
- Valve Only (T60065)
- Shower Only (T60265)

### STANDARD SPECIFICATIONS:


- Single-function shower head - 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa.
- Tub port maximum flow rate 8.6 gpm @ 60 psi with R60000-UNBX
- TempAssure® 60 series thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to  $\pm 3.6^{\circ}\text{F}$ .
- Must also order MultiChoice® Universal rough valve body (R60000 Series).
- Back-to-back installation capability.
- Lever volume control handle; temperature adjustment dial.
- Graphics indicate hot/cold temperature adjustment.
- Field adjustable to limit handle rotation into hot water zone.
- All parts replaceable from the front of the valve.
- Adjusts for up to 1" wall thickness.

### WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to [www.brizo.com](http://www.brizo.com) for the complete details of our limited warranty.

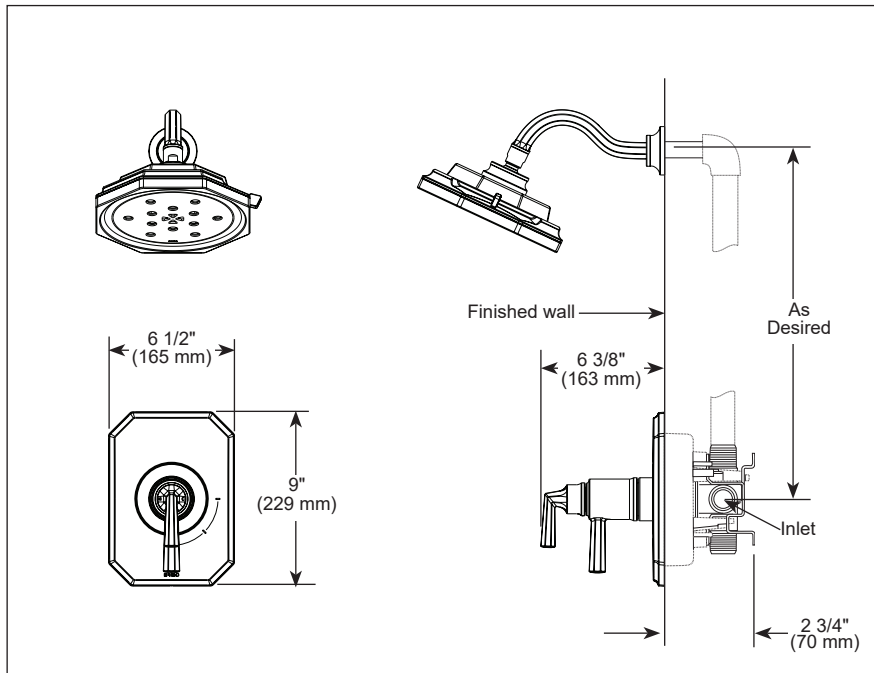


**87375-▲ 1.75 GPM Shower Head**

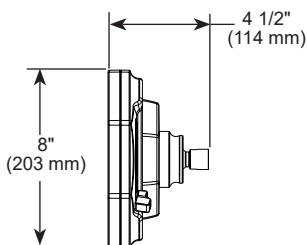

**83865-▲ Shower Arm & Flange**

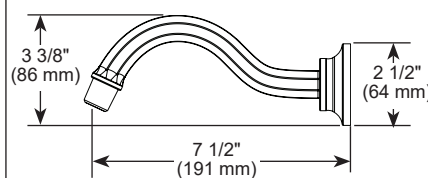

**RP74785 Available Extension Kit**



▲ Designate proper finish suffix



### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- ICC/ANSI A117.1- Valve control only
- EPA WaterSense®