


RDFQF PREMIUM RADIATION DAMPER FOR VENTILATION FANS

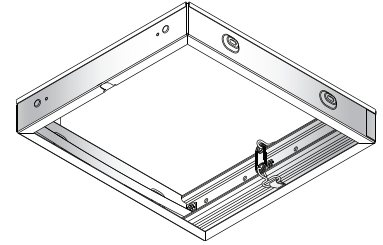

Premium radiation damper for use with Broan and NuTone ventilation fans (sold separately).

FEATURES

- For use in 1, 2 and 3 hour rated floor-ceiling and roof-ceiling constructions
- Galvanized steel frame
- High temperature, non-asbestos, reinforced fiber thermal fabric
- Stainless steel closure springs
- 165°F fusible link
- Removable damper allows complete fan and damper serviceability without disturbing the surrounding ceiling material
- Meets or exceeds NFPA-90A
- UL Classified (UL-555C)

RDFQF for use with the following ventilation fan models:

Broan QTRE080, QTRE080C2S, QTRE080R, QTRE110, QTXE050, QTXE080, QTXE110, QTXE150, SSQTXE080, SSQTXE110, QTR080F, QTR110F, QTRE080F, QTRE110F

NuTone QTREN080, QTREN110, QTRN080F, QTRN110F, QTREN080F, QTREN110F, QTXEN050, QTXEN080, QTXEN110, QTXEN150, Smart-Sense


TYPICAL SPECIFICATION

Radiation damper shall be Broan/NuTone RDFQF suitable for use with the following ventilation fan models:

Broan QTRE080, QTRE080C2S, QTRE080R, QTRE110, QTXE050, QTXE080, QTXE110, QTXE150, SSQTXE080, SSQTXE110, QTR080F, QTR110F, QTRE080F, QTRE110F

NuTone QTREN080, QTREN110, QTRN080F, QTRN110F, QTREN080F, QTREN110F, QTXEN050, QTXEN080, QTXEN110, QTXEN150, Smart-Sense

Radiation damper shall be rated for use in up to three hour ceiling constructions. It shall be UL Classified (UL-555C) and meets or exceeds NFPA-90A.

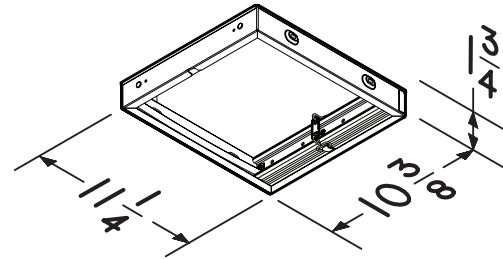

SEE DETAILS ON
UL CLASSIFICATION
MARKING ON PRODUCT

Broan-NuTone LLC Hartford, Wisconsin www.broan.com www.nutone.com 800-558-1711
Broan-NuTone Canada Mississauga, Ontario www.broan.ca www.nutone.ca 877-896-1119

| REFERENCE | QTY. | REMARKS | Project |
|-----------|------|---------|-------------------|
| | | | Location |
| | | | Architect |
| | | | Engineer |
| | | | Contractor |
| | | | Submitted by Date |