

# Brondell®

## Swash Thinline T22 Bidet Toilet Seat with Open Front Less Cover and Side Arm Control

**Model:** T22-OFLC-EW

### Product Specifications

Backed by high-end features and less than 4 inches in height, the Swash Thinline T22 with Open Front Less Cover and Side Arm Control brings a touch of luxury to any commercial or public restroom. Give guests, visitors, and employees something to talk about with comfort-enhancing tech and a sleek, lidless design.



### Features

- Open-Front Seat and Lidless Design
- Reinforced Internal Construction
- Ceramic Water Heater System
- Fully Adjustable Temperature and Pressure
- Heated Seat with 3 Temperature Levels
- Activated Carbon Deodorizer
- Warm Air Dryer with 5 Temperature Levels
- Self-Cleaning, Stainless Steel Nozzle
- 5 Adjustable Nozzle Positions
- Nozzle Oscillation, Gentle, and Strong Wash Modes
- Side-Arm Control Panel
- 1-year commercial warranty

### Codes/Standards

Meets Uniform Plumbing Code Standards Set by the International Association of Plumbing and Mechanical Officials (IAPMO)

Certified to ASME A112.4.2/CSA B45.16

Meets ANSI/ICC A117.1 for ADA Compliance

Meets Electrical TUV SUD Certification for Compliance to CSA C22.2 No. 68, CSA C22.2 No. 64, and UL 1431



### Technical Specifications

Power Voltage / Frequency	120 V / 60 Hz
Max Power Consumption	1470 W
Power Cord Length	47.24" / 119.98 cm
Seat Weight Limit	397 lb / 180 kg

### Warm Water Washing Device

Supply Water Pressure	7.11 psi-106.7 psi / 0.05 MPa-0.74 MPa
Incoming Water Temperature	50°F-89.6°F / 10°C-32°C
Default Cycle Time	2 minutes
Water Pressure Control	5 levels
Water Temperature Control	4 levels: OFF - Room Temp; Low - 93.2°F / 34°C; Medium - 98.6°F / 37°C; High - 104°F / 40°C
Max Heater Power Consumption	1400 W


### Heated Seat and Air Dryer

Seat Temperature Control	4 levels: OFF - Room Temp; Low - 93.2°F / 34°C; Medium - 98.6°F / 37°C; High - 104°F / 40°C
Number of Dryer Settings	5 levels
Default Dryer Cycle Time	2 minutes

**NOTE:** The specifications listed above are subject to change without prior notice for reasons of improving the product performance.

# Brondell®

Weight and Dimensions	
Seat Thickness	1" / 2.5 cm
Bidet Hose Length	23.6" / 60 cm
Bidet Hose Connection Size	½" x ½"
Weight	Elongated: 8.7 lb / 3.9 kg

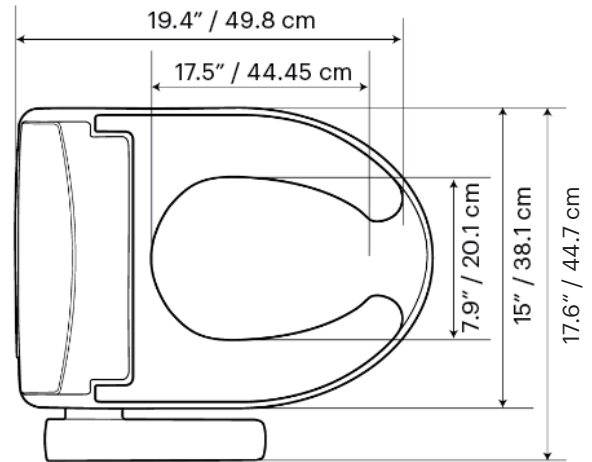

## Installation Notes

Standard installation hardware included with each unit (7/8" T-Valve and bidet hose with ½" connections). Alternative installation parts available separately (flushometer valve or bidet hose with ½" OD Compression fitting and ½" standard connection).

This bidet can be installed on toilets with a bolt spread of 5.3" to 7.7".

This product should be only used with a grounded GFCI outlet.

**NOTE:** The specifications listed above are subject to change without prior notice for reasons of improving the product performance.

#23T22OFLCEW\_1011

**Brondell®**

Feels better already.

Brondell, Inc.  
PO Box 470085  
San Francisco, CA 94147  
brondell.com