



Job Name:

Contact:

Ordering Code:

Fixture Type:

Titan 1



Description

Bruck's European and American Artisan, mouth-blown glass is known throughout the world for its quality and beauty. Several light source options, mounting options, colors and finishes allow for a unique design. Most of Bruck's mini-pendant glass allows for easy screw-on / screw-off for a simple installation.

Standard cable length is 59". Overall cable length is measured and begins from uni-plug or top of mono-point. For the track adapters, overall cable length begins at the shoulder of the ECO/GEO adapter and the track center of the Zonyx adapter. Cable length measurement ends at the top of glass or to the mounting arms.

Ordering Codes

Follow the steps to specify your fixture,

example:

1 Light Source	2 Shade Color	3 Finish	4 Base Option†	5 Mounting Option
113 1000 lm LED 223 400 lm LED 221 low voltage 110 line voltage	805 white 806 amber 807 blue 808 red	bz bronze ch chrome mc matte chrome	GU24 base IN medium E26 base	MP 4" Kiss Canopy ecobk ECO/HALO black ecosv ECO/HALO matte silver ecowh ECO/HALO white geobk GEO black geosv GEO matte silver geowh GEO white zonmc Zonyx matte chrome UNI12 Uni-Plug 12 MULTI Multi-point

NOTES:
 1. 113 for MP, eco, geo, and zon track options only
 2. 223 for MP, UNI12 and MULTI mounting only
 3. 221 for MP and UNI12 mounting only
 4. 110 for MP, MULTI, eco, geo, and zon track options only

NOTES:
 †Base Options for 110 only




Job Name:

Contact:

Ordering Code:

Fixture Type:

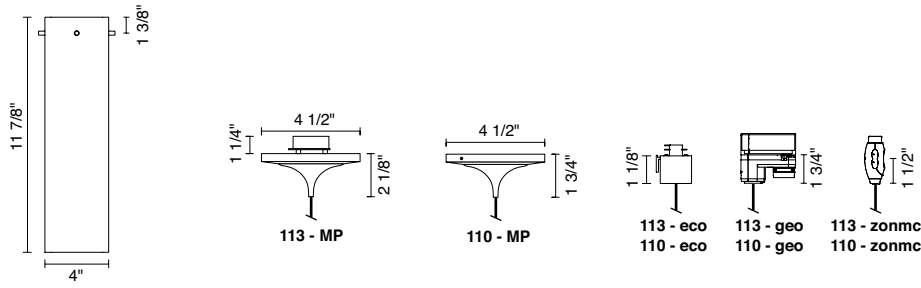

Light Source **113 - LED** **110 - line voltage (GU24)** **110 - IN - line voltage (E26)**

Performance

<p>LED</p> <p>LUMENS</p> <p>CCT</p> <p>SDCM</p> <p>CRI</p> <p>LIFE</p>	<ul style="list-style-type: none"> Nichia 757D 1000 lm 3000k 3 MacAdam Ellipse, +/- 75 Kelvin >90 based on IESNA-LM80-2008: 70% of initial lumens after 60,000 hrs 	<ul style="list-style-type: none"> lamp dependent 	<ul style="list-style-type: none"> lamp dependent
--	---	--	--

Technical Specs

<p>Socket Listing</p>	<ul style="list-style-type: none"> integrated LED module ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0 	<ul style="list-style-type: none"> GU24 base socket ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0 	<ul style="list-style-type: none"> medium E26 base socket ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) cETL Listed to CSA C22.2 #250.0 and #9.0
-----------------------	---	--	--

Mounting

<p>4" Kiss Canopy</p>	<ul style="list-style-type: none"> 100-277VAC, 50/60Hz input 18W, 20VA Trailing Edge (ELV) dimming Mount to 3" - 4" round J-Box 	<ul style="list-style-type: none"> 120VAC input 28W, 28VA (max 28W lamp) Dimmable (with compatible lamp) Mount to 3" - 4" round J-Box 	<ul style="list-style-type: none"> 120VAC input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp) Mount to 3" - 4" round J-Box
<p>Line Voltage Track</p>	<ul style="list-style-type: none"> 100-277VAC, 50/60Hz input 18W, 20VA Trailing Edge (ELV) dimming Connects to line voltage adapter (ECO, GEO, Zonyx) 	<ul style="list-style-type: none"> 120VAC input 28W, 28VA (max 28W lamp) Dimmable (with compatible lamp) Connects to line voltage adapter (ECO, GEO, Zonyx) 	<ul style="list-style-type: none"> 120VAC input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp) Connects to line voltage adapter (ECO, GEO, Zonyx)
<p>MULTI</p>	<ul style="list-style-type: none"> 100-277VAC, 50/60Hz input 18W, 20VA Trailing Edge (ELV) dimming Connects to line voltage adapter (ECO, GEO, Zonyx) 	<ul style="list-style-type: none"> 120VAC input 28W, 28VA (max 28W lamp) Dimmable (with compatible lamp) Mount to line voltage multi-point canopy Provided with field adjustable cord only 	<ul style="list-style-type: none"> 120VAC input 100W, 100VA (max 100W lamp) Dimmable (with compatible lamp) Mount to line voltage multi-point canopy Provided with field adjustable cord only

Warranty

<ul style="list-style-type: none"> 5 year limited fixture warranty 	<ul style="list-style-type: none"> 1 year limited fixture warranty 	<ul style="list-style-type: none"> 1 year limited fixture warranty
---	---	---



Made in the USA - meets the requirements of the Buy American provision within the ARRA




Job Name:

Contact:

Ordering Code:

Fixture Type:

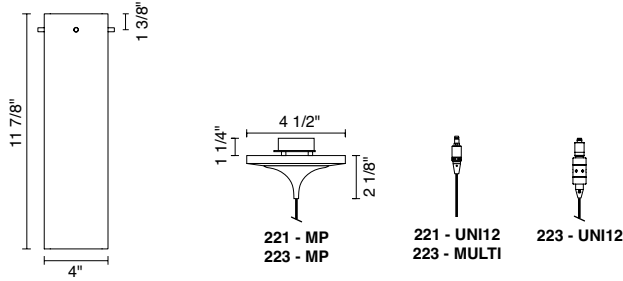

Light Source **223 - LED** **221 - low voltage (Bi-Pin)**

Performance

<p>LED</p> <p>LUMEN</p> <p>CCT</p> <p>SDCM</p> <p>CRI</p> <p>LIFE</p>	<ul style="list-style-type: none"> • Cree XTE • 400 lm • 2800k • 3 MacAdam Elipse, +/-75 Kelvin • 90 min. • based on IESNA-LM80-2008: 90% of initial lumens after 60,500 hrs 	<ul style="list-style-type: none"> • lamp dependent
---	--	--

Technical Specs

<p>Socket Listing</p>	<ul style="list-style-type: none"> • integrated LED module • ETLus Listed to UL1598, UL1574 and UL2108 (Suitable for dry locations only) • cETL Listed to CSA C22.2 #250.0 and #9.0 	<ul style="list-style-type: none"> • GY6.35 socket • ETLus Listed to UL1598, UL1574 and UL2108 (Suitable for dry locations only) • cETL Listed to CSA C22.2 #250.0 and #9.0
-----------------------	--	--

Mounting

<p>Uni-Plug UNI12</p>	<ul style="list-style-type: none"> • 12V AC input • 9W, 11.3VA • Dimmable 	<ul style="list-style-type: none"> • 12V AC/DC input • 50W, 50VA (max 50W lamp) • Dimmable • Connects to Uni-Light system with appropriate low voltage adapter (V/A, Enzis, High-Line) or line voltage adapter (ECO, GEO, Zonyx)
<p>4" Kiss Canopy</p>	<ul style="list-style-type: none"> • 120-277 50/60Hz input • 8W, 8VA • Dimmable: <ul style="list-style-type: none"> • ELV (Reverse Phase) • Mount to 3 1/2" - 4" round J-Box • Short circuit protection • Thermal protection 	<ul style="list-style-type: none"> • 120VAC 50/60Hz input • 11.7V AC output 49W, 50VA (max 50W lamp) • Dimmable (Trailing Edge ELV) • Mount to 3 1/2" - 4" round J-Box • Short circuit protection • Overload protection • Thermal protection
<p>MULTI</p>	<ul style="list-style-type: none"> • 700mA constant current input • 6.3W • Mounts to low voltage LED multi-point canopy • Dimmable, refer to low voltage LED canopy spec sheet 	

Warranty

<ul style="list-style-type: none"> • 5 year limited fixture warranty 	<ul style="list-style-type: none"> • 1 year limited fixture warranty
---	---



Made in the USA - meets the requirements of the Buy American provision within the ARRA