



JOB NAME _____

CONTACT _____

ORDERING CODE _____

Sirena Canopy, Track SW G9

ORDERING CODE		
LIGHT SOURCE	MLED ² MSG9	static white LED, 450 lm G9 socket
CCT	30K ¹ 35K ¹	3000K 3500K
CRI	90 ¹	90 CRI
SHADE COLOR	920 922	white red
FINISH	MC ⁴ CH ⁴ BZ ⁴	matte chrome with clear braided cable chrome with clear braided cable bronze with brown braided cable
MOUNTING OPTIONS	P ³ ECOBK ECOWH ECOMC GEOBK GEOWH GEOMC ZONMC	canopy pendant ECO/HALO black ECO/HALO white ECO/HALO matte chrome GEO black GEO white GEO matte chrome Zonyx matte chrome



ORDERING CODE _____

Follow the steps to specify your fixture, example:
MLED - 30K - 90 - 920 - MC - P

- NOTES**
1. CCT and CRI options for MLED only.
 2. For LED info see page 2.
 3. Canopy matches the finish chosen.
 4. Cable info: 22ga Type SVT Cable. 0.120" outer diameter. Rated to 300V & 105°C.

DESCRIPTION

Bruck's European and American Artisan, mouth-blown glass is known throughout the world for its quality and beauty. Several light source options, mounting options, colors and finishes allow for a unique design. Most of Bruck's mini-pendant glass allows for easy screw-on/screw-off for a simple installation or design change. Pendant L₇₀ is 145,000 hours of operation.

HOUSING

The hardware is offered in matte chrome, bronze or chrome finish and seconds as the pendant thermal heatsink.


MOUNTING

- The pendant can be mounted from Bruck's field adjustable canopy. The standard overall cable length of 59" can be field-cut or specified when ordering. Overall cable length is measured and begins from top of canopy. See the decorative Junction Box Cover for open ceiling applications.
- Optional track mounting: Global Trac Systems, GEO track, ECO track / HALO® Power track, and Zonyx track. Overall cable length begins at the shoulder of the ECO/GEO adapter and the track center of the Zonyx adapter. Cable length measurement ends at the top of glass or to the mounting arms.
- Kevlar coated cable for easy cleaning, short circuit protection, no discoloration and fraying over time.

LISTINGS

- Listed to UL1598 and UL1574 (Suitable for dry locations only)
- Listed to CSA C22.2 #250.0 and #9.0

MOUNTING OPTIONS

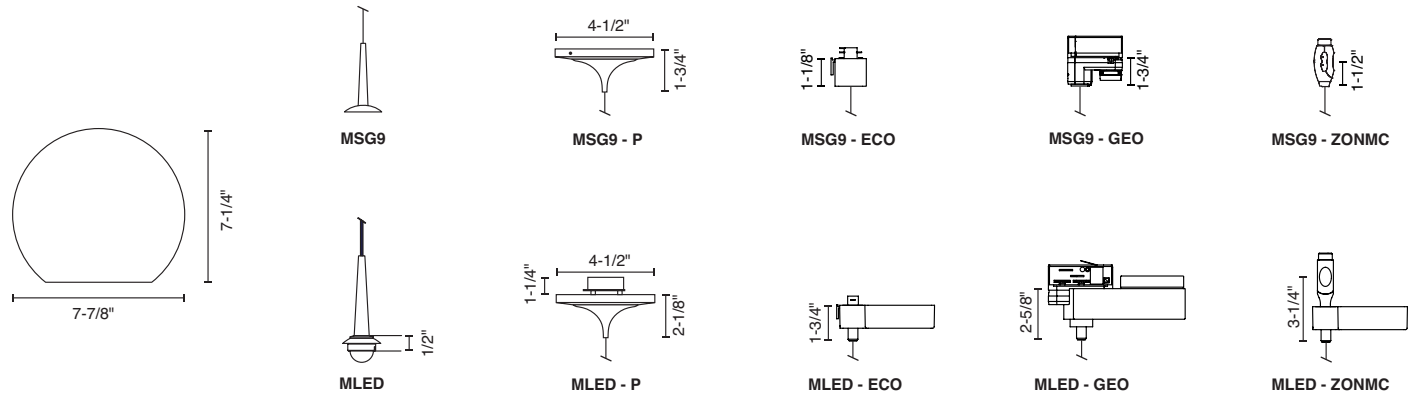

LIGHT SOURCE

Light Source	MLED - Static White LED	MSG9 - G9 SOCKET
Performance		
LED	Cree XHP50	lamp dependent
Lumens	450lm	
CCT	3000K or 3500K	
SDCM	2-Step MacAdam Ellipse	
CRI	>90	
Lumen Maintenance	L _{70<sub>sub></sub>} > 145,000 hours	
Technical Specs		
Socket Listing	<ul style="list-style-type: none"> Integrated LED module
 ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only)
 cETL Listed to CSA C22.2 #250.0 and #9.0 	<ul style="list-style-type: none"> G9 socket
 ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only)
 cETL Listed to CSA C22.2 #250.0 and #9.0
Mounting		
Canopy	<ul style="list-style-type: none"> 120-277Vac, 50/60Hz input
 7.0W, 7.5VA
 Tri-mode dimming (Triac, ELV and 0-10V)
 Mount to 3-1/2" to 4" round J-Box
 Short circuit protection
 Thermal protection 	<ul style="list-style-type: none"> 120-277Vac, 50/60Hz input
 40W, 40VA (max 40W lamp)
 Dimmable (Incandescent)
 Mount to 3-1/2" to 4" round J-Box

Line Voltage Track	<ul style="list-style-type: none"> 120Vac, 50/60Hz input
 7.0W, 7.5VA
 Triac and ELV phase dimming
 Connects to line voltage adapter (ECO, GEO, Zonyx) 	<ul style="list-style-type: none"> 120Vac, 50/60Hz input
 40W, 40VA (max 40W lamp)
 Dimmable (Incandescent)
 Connects to line voltage adapter (ECO, GEO, Zonyx)
Warranty		
	• 5 year limited fixture warranty	• 1 year limited fixture warranty