

JOB NAME \_\_\_\_\_

CONTACT \_\_\_\_\_

ORDERING CODE \_\_\_\_\_

## ORDERING CODE

<b>SERIES</b>	EXT	exterior
<b>TYPE</b>	PZ1 PZ2	5-1/2", 5W - 120lm 9-7/8", 9W - 250lm
<b>CCT</b>	30K 40K	3000K 4000K
<b>CRI</b>	80	80 CRI
<b>VOLTAGE</b>	UNV	120V-277V
<b>FINISH</b>	BK BK-C BK-R	anthracite anthracite with shade - concrete finish anthracite with shade - rust finish

# PIAZZA


## Outdoor Step Light IP65 Wall




PZ1 - PIAZZA 1



PZ2 - PIAZZA 2



BK-C BK-R



BK-C BK-R

### FEATURES

- IP65
- 2 sizes; 5 1/2" & 9 7/8"
- Anthracite finish
- Optional shade covers in concrete and rust
- 3000k & 4000k

### HOUSING

- Casted aluminum housing in anthracite.

### MOUNTING

- Mount to 3-1/2" to 4" octagonal recessed junction box.

### ELECTRICAL/CONTROLS

- Integrated LED Module
- Non-dimmable

### LISTING

- ETLus Listed to UL1598 (suitable for wet locations)
- cETL Listed to CSA C22.2 #250.0
- BUG Rating: B1 - U1 - G0
- 3000k or warmer must be selected for International Dark-Sky Association approval


### LED INFO

- LED: Module SMD2835
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: L<sub>70</sub> > 50,000 hrs
- Warranty: 5 year limited warranty


\_\_\_\_\_

Follow the steps to specify your fixture, example:  
**EXT - PZ1 - 30K - 80 - UNV - BK**


\*Wall mounting is recommended to be installed on a 4in deep regress 2-1/8" octagonal junction box.

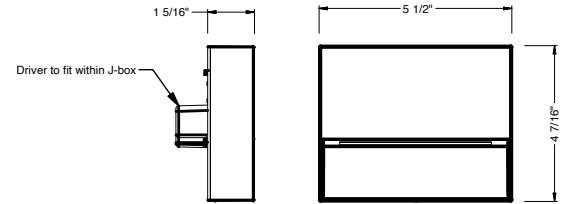


Piazza 1

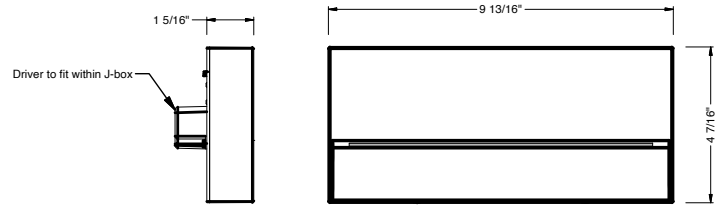

Piazza 2

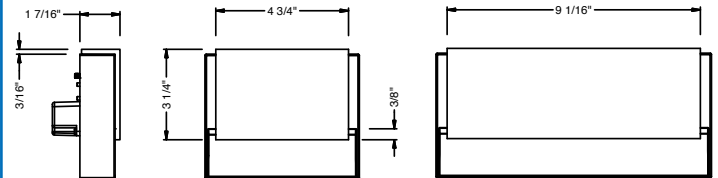

Rust Finish

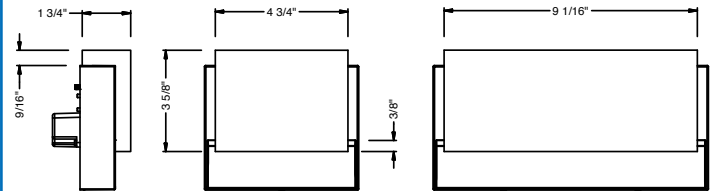

Concrete Finish

PIAZZA - 1

PIAZZA - 2