

	Contemporary Collection		Vintage Collection	Industrial Collection	Natural Marble Collection
Item	810084	810087	810081	810090	810092
Ordering Code	PEND/HW/CONTEMP/BLK-BLK	PEND/HW/CONTEMP/WHT-MULT	PEND/HW/VINTAGE/BRZ-BLK	PEND/HW/INDUST/GM-BLK	PEND/HW/NAT/WHT-SILV
Item	810085	810088	810082	810091	810093
Ordering Code	PEND/HW/CONTEMP/BLK-CHEV	PEND/HW/CONTEMP/GM-BLK	PEND/HW/VINTAGE/GM-SILV	PEND/HW/INDUST/WG-BLK	PEND/HW/NAT/BLK-BLK
Item	810086	810089	810083		
Ordering Code	PEND/HW/CONTEMP/BLK-MULT	PEND/HW/CONTEMP/WG-BLK	PEND/HW/VINTAGE/WG-BLK		

Before installation, confirm all parts are in good condition. If any parts are damaged, do not attempt to install. Contact an American Lighting Association (ALA) Certified Relationship Specialist at Bulbrite with questions about your lamp at 800-528-5555 or info@bulbrite.com.

GENERAL SAFETY INFORMATION

PLEASE READ ALL SAFETY INSTRUCTIONS BEFORE BEGINNING ANY INSTALLATION

DANGER – RISK OF SHOCK – DISCONNECT POWER BEFORE INSTALLATION

CAUTION: IF THE FIXTURE SHOWS ANY SIGNS OF MALFUNCTION (BUZZING, FLICKERING, ETC.) IMMEDIATELY TURN OFF POWER, DISCONNECT WIRING, REMOVE THE BULB FROM FIXTURE AND CONTACT BULBRITE.


WARNING: PLEASE CONSULT A LICENSED ELECTRICIAN IF YOU HAVE ANY QUESTIONS.

INSTRUCTIONS

BEFORE INSTALLATION PLEASE NOTE:

Read instructions carefully and completely before installation. **TURN OFF** the power at the electrical breaker to the outlet. Always be sure to **TURN OFF** the power before changing the bulb or cleaning the fixture. The maximum rated wattage bulb for use with this fixture is 60W.

- A** Attach the mounting strip (1) to the ceiling by using the outlet box screw (2).
- B** Select socket (6) mounting height and adjust length of cord by pulling cord through the canopy until desired length is reached. Move plastic cord stopper (A) toward metal nut to keep cord length. Tighten embedded screw (B) with wrench (C) provided.
- C** Connect the wires by using the supplied wire nuts (3). (Note: Connect the black fixture wire to the black live wire. Then connect the white fixture wire to the white neutral wire. Lastly connect the ground fixture wire to the ground post.) Please avoid the wire being exposed outside when wiring connections.
- D** Attach the canopy (5) to the mounting strip (1) by using screws (4).
- E** Insert bulb (7).

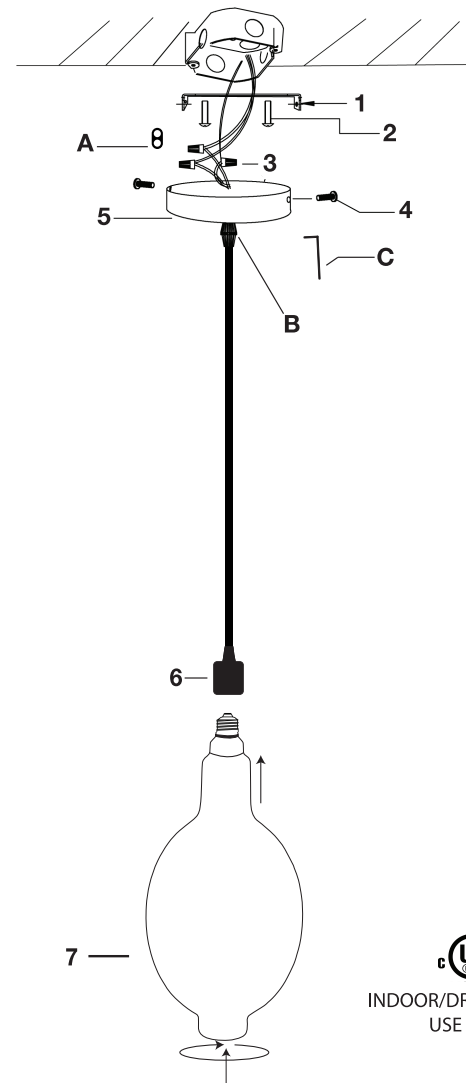

UL US
INDOOR/DRY LOCATION
USE ONLY