KITCHEN FAUCET / MIXER / LINEAR

ACTION: KITCHEN FAUCET

KNURL: LINEAR

RANGE: KITCHEN FAUCETS

A kitchen faucet with single lever mixer. This faucet has been cast, sand-blasted and machined from solid metal in Italy. It features our signature linear-knurl pattern and is refined by hand. Flow rate at 58 PSI (4 BAR) is 1.47GPM.

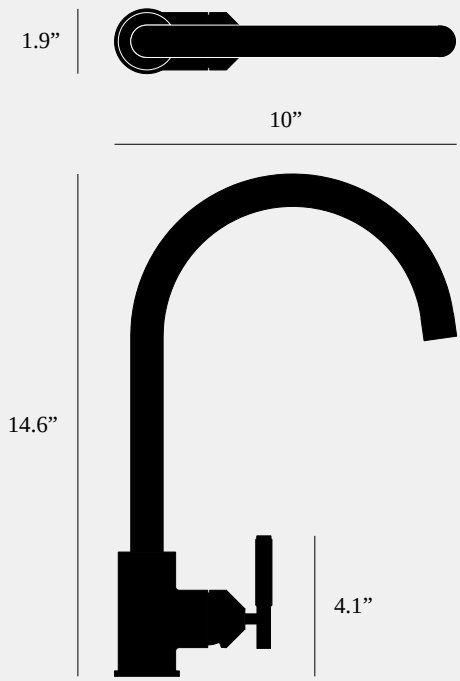

SPECIFICATIONS

A kitchen faucet with a single lever action that mixes water from the hot and cold pipes in your kitchen.
Maximum thickness of mounting surface 70mm/2.76”, with supplied fixings.
Minimum recommended water pressure: 7.25 PSI (0.5 BAR).
Maximum recommended water pressure: 72 PSI (5 BAR).
Recommended maximum hot water temperature: 70 °C (158°F).
Recommended temperature range: 5 – 60 °C (41 – 140 °F).
Cartridge material: ceramic
360 degree swivel spout.
Note: exceeding these temperatures or water pressures can result in damage to the tap. A pressure reducing valve may be required to be fitted in high water pressure situations.

FINISH & SKU NUMBERS

sku:	finish:	size:
NKT-051673	brass	
NKT-351675	gun metal	
NKT-071672	steel	
NKT-591674	welders black	

INCLUDED

1 x Kitchen Mixer Faucet
2 x Flexible connector hoses
1 x Tap Base and set of washers
1 x Threaded bar and nut
1 x Supporting tap brace (for surfaces with thickness < 5mm)

PLEASE NOTE

All Buster + Punch mixer taps conform to standard EN817. In some cases, local housing regulations may require mixer taps to be of a higher minimum water pressure standard. In this instance we would recommend consulting with a certified plumber about installing a pressure regulator or similar device. Mixer taps are tested to work with a max. pressure of 10 bar (1000 kPa) and recommended working pressure range is 1.0 – 5.0 bar (100 kPa – 500 kPa).

CARE INSTRUCTIONS

Wipe with damp cloth with no loose hairs, avoid using any chemicals. Please note all finishes are prone to aging.