




Features

- Stopper is flush with flange in open position
- Easy installation and maintenance of stopper
- For use on sinks with overflow or less overflow Fully polished and finished for exposed installations
- Connection: 1-1/4" x 4" tailpiece (7" version, 9069, sold separately) US Patented design No. 915102
- Solid brass construction
- Over 30 finishes including 15 PVD finishes


Codes/Standards Applicable Product meets or exceeds the following:

- ASME A112.18.2/CSA B125.2

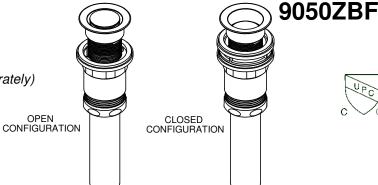

THICK SINK APPLICATION (5/8" - 2")

THIN SINK APPLICATION (1/16" - 9/16") SHOWN WITH OPTIONAL 9050Z-TSS

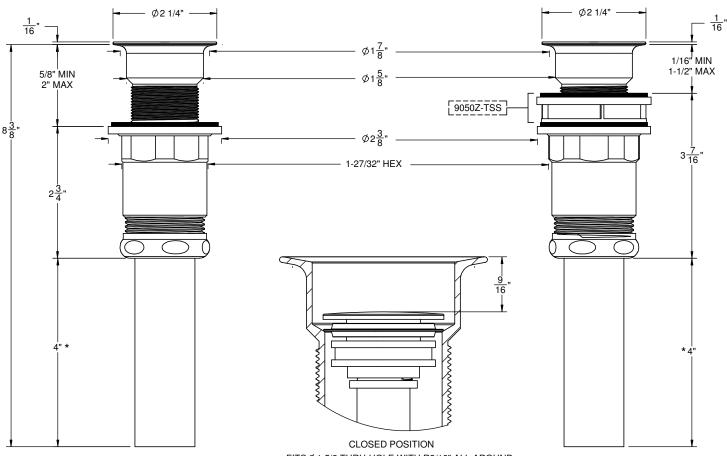

FITS ϕ 1-5/8 THRU-HOLE WITH R3/16" ALL AROUND

* TAIL PIECE MAY BE CUT TO 1" MIN

ALL DIMENSIONS SHOWN TO NEAREST 1/16"